

Adjustable discriminator cleans up signal noise

by Dennis D. Barber
University of Houston, Houston, Texas

Telemetry signals or other logic signals often pick up a lot of extra noise during transmission. But they can easily be cleaned up at the receiving end by a discriminator circuit having adjustable hysteresis.



The voltage discriminator shown in the figure can clean up signals containing as much as 70% noise without the need to alter the signal amplitude or dc level. The input to the amplifier that serves as the voltage-discriminator (amplifier A₄) is kept constant at 5 volts peak-to-peak. But the signal to be conditioned, the one at the input to the circuit, does not have to be critically maintained or its level known precisely.

Amplifier A₁ is gain-controlled, with field-effect transistor Q₁ acting as the gain-control element. This FET, which functions as a voltage-variable resistor, is controlled by amplifiers A₂ and A₃. Amplifier A₄ is the voltage-discriminator stage that provides the adjustable hysteresis through its variable regenerative feedback.

Before the capacitively coupled input signal goes positive or negative, the output of amplifier A₁ may be treated as if it were at ground. The gain of amplifier A₁ is then at its maximum since the inputs to amplifiers A₂ and A₃ are below (in absolute magnitude) their respective reference voltages. The output of each amplifier is now positive, and diodes D₁ and D₂ are back-biased, which allows transistor Q₁ to turn fully on.

If the input signal goes positive, the output of A₁ will move towards the positive power-supply level. When it reaches the reference voltage of A₂, the output of A₂ quickly swings negative, turning transistor Q₁ partially off and thus lowering the gain of A₁. The output of A₁ is held at the positive reference voltage until this reference level is greater than the input voltage multiplied by the maximum gain of A₁. At this point, the input voltage is only a few millivolts above ground.

If the input signal goes negative, the output of A₁ will move towards the positive power-supply level. When it reaches the reference voltage of A₃, the output of A₃ quickly swings negative, turning transistor Q₁ partially off and thus lowering the gain of A₁. The output of A₁ is held at the positive reference voltage until this reference level is greater than the input voltage multiplied by the maximum gain of A₁. At this point, the input voltage is only a few millivolts above ground.

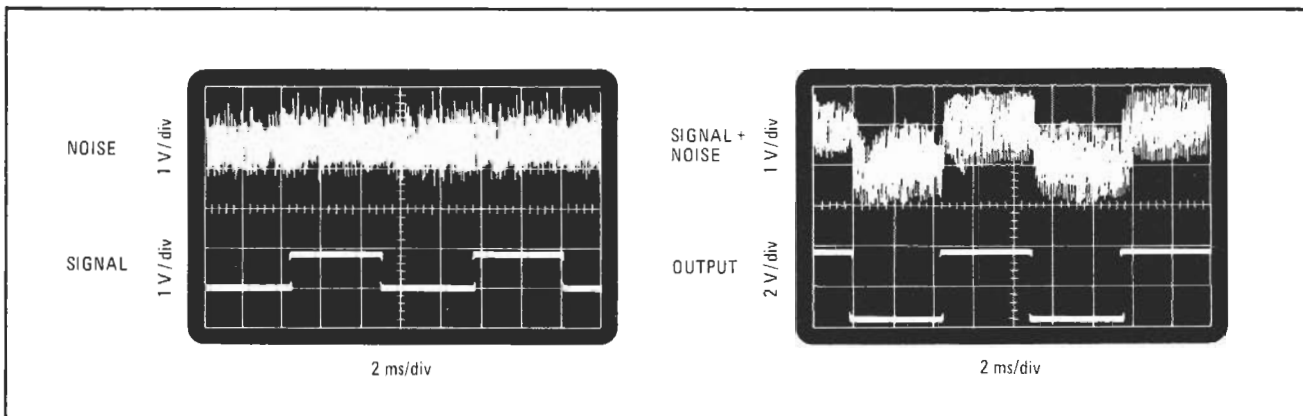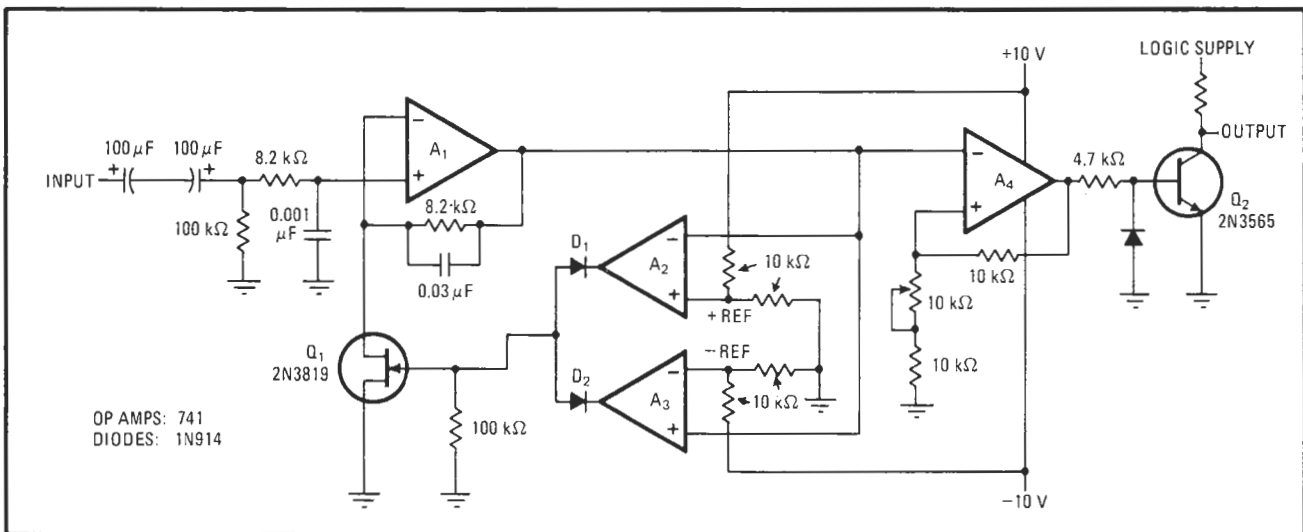

Pulling the data out of the noise. Adjustable-hysteresis voltage discriminator makes significant improvement in signal-to-noise ratios, as can be seen from the scope traces. The level of regenerative feedback of amplifier A₄, the voltage-discriminator stage, is adjusted to provide optimum noise immunity. The gain of amplifier A₁ is controlled by transistor Q₁, which is operated as a voltage-variable resistor.