



## SOUND ENHANCEMENT AUDIO PROCESSOR


### ■ GENERAL DESCRIPTION

The **NJM2153** is a sound enhancement audio processor for professional audio equipments. It regenerates high definitive and nearly real sound.

The internal VCA (voltage controlled amplifier) suppresses the boost gain in high band to reduce noise when faint signals are inputted.

The **NJM2153** is suitable for mixer and effector for musical instruments, and high-end audio equipment requiring low distortion and wide dynamic range.

### ■ PACKAGE OUTLINE




**NJM2153M**

### ■ FEATURES

- Operating Voltage           (±9 to ±18V)
- Low Operating Current   (5.2mA typ.)
- Low Output Noise       (20μVrms typ. at BBE ON)
- Low Distortion           (0.02% typ. at BBE ON)
- Internal BBE ON/OFF Switch
- Bipolar Technology
- Package Outline           DMP20

### ■ BLOCK DIAGRAM

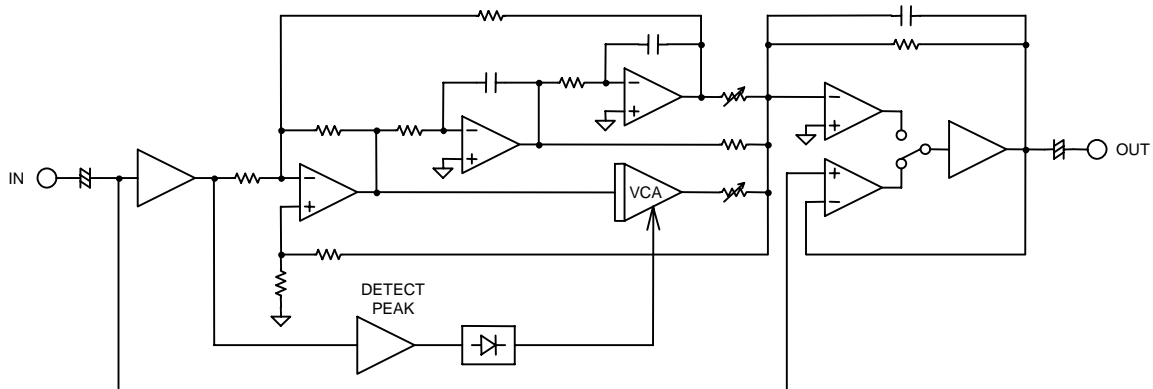

# NJM2153

## ■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	$V^+/V^-$	$\pm 20$	V
Power Dissipation	$P_D$	350	mW
Operating Temperature Range	$T_{opr}$	-40 to +85	°C
Storage Temperature Range	$T_{stg}$	-40 to +125	°C


## ■ ELECTRICAL CHARACTERISTICS ( $V^+/V^- = \pm 15.0V$ , $T_a = 25^\circ C$ , $V_{in} = -12dBV/1kHz$ , $R_g = 600\Omega$ , $R_L = 100k\Omega$ )

PARAMETER	SYMBOL	TEST CONDITION	BBE	MIN.	TYP.	MAX.	UNIT
Operating Voltage	$V^+/V^-$			$\pm 9.0$	-	$\pm 18.0$	V
Supply Current	$I_{cc}$	No Signal	ON	-	5.2	8.0	mA
Low Voltage Gain	$G_{VLF}$	f=50Hz	ON	10.0	12.0	14.0	dB
Mid Voltage Gain	$G_{VMF}$	f=700Hz	ON	-2.3	-0.3	0.7	dB
High Voltage Gain 1	$G_{VHF1}$	f=10kHz, $V_{in} = 0dBV$	ON	10.5	12.0	13.5	dB
High Voltage Gain 2	$G_{VHF2}$	f=10kHz, $V_{in} = -35dBV$	ON	7.2	9.2	11.2	dB
High Voltage Gain 3	$G_{VHF3}$	f=10kHz, $V_{in} = -50dBV$	ON	-2.0	0.0	2.0	dB
Attack Time	$T_{ATC}$	f=20kHz, $-\infty \rightarrow 0dBV$	ON	-	100	-	$\mu S$
Recovery Time	$T_{RCV}$	f=10kHz, $0dBV \rightarrow -50dBV$	ON	-	500	-	mS
Maximum Input Voltage	$V_{IM}$	THD=1%	ON	5.0 (1.78)	6.5 (2.11)	-	dBV (Vrms)
Maximum Output Voltage	$V_{OM}$	THD=1%	ON	17.0 (7.08)	18.5 (8.41)	-	dBV (Vrms)
Output Noise 1	$V_{NO1}$	$R_g = 0\Omega$ , DIN AUDIO	OFF	-	-100 (10)	-90 (31.6)	dBV ( $\mu V_{rms}$ )
Output Noise 2	$V_{NO2}$	$R_g = 0\Omega$ , DIN AUDIO	ON	-	-94 (20)	-84 (63.1)	dBV ( $\mu V_{rms}$ )
Total Harmonic Distortion 1	THD1	400Hz to 30kHzBPF	OFF	-	0.01	0.05	%
Total Harmonic Distortion 2	THD2	400Hz to 30kHzBPF	ON	-	0.02	0.1	%
SW Control Voltage Threshold	$V_{th}$		ON	-2.0	0	2.0	V

## MODE SWITCH

MODE	SW
BYPASS	L
BBE	H

## PIN CONFIGURATION

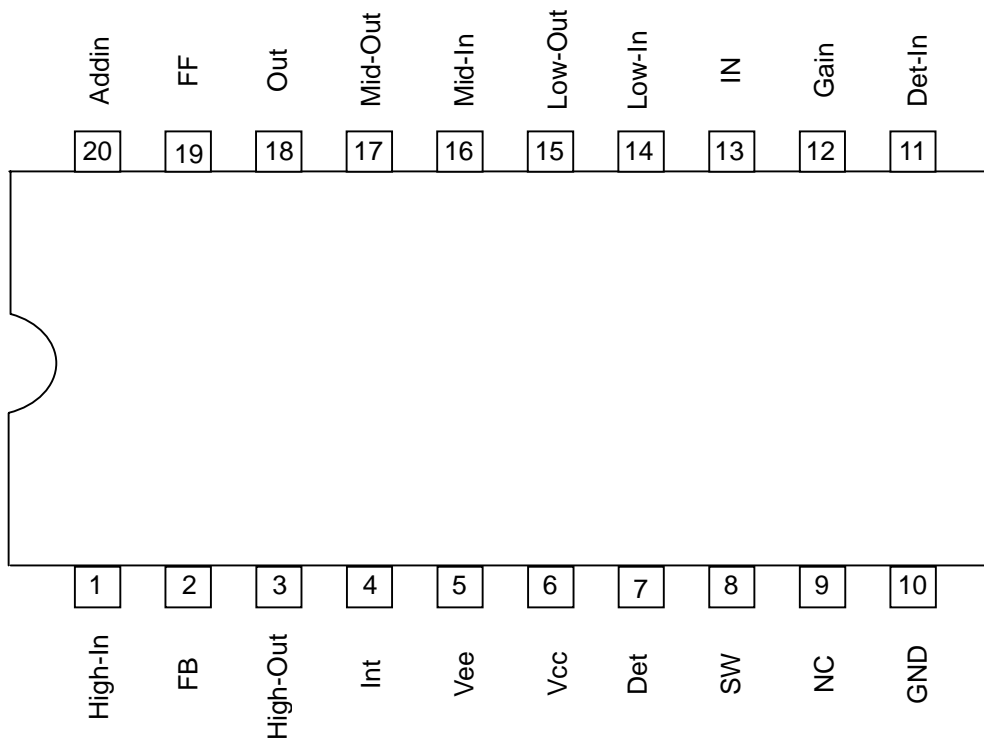


## PIN FUNCTION

No.	SYMBOL	FUNCTION	No.	SYMBOL	FUNCTION
1	High-In	High Band Input	11	Det-In	Detector Input
2	FB	Feedback	12	Gain	Gain
3	High-Out	High Band Output	13	IN	Input
4	Int	Integral	14	Low-In	Low Band Input
5	Vee	Negative Power Supply	15	Low-Out	Low Band Output
6	Vcc	Positive Power Supply	16	Mid-In	Mid Band Input
7	Det	Detector	17	Mid-Out	Mid Band Output
8	SW	BBE ON/OFF Switch	18	Out	Output
9	NC	-	19	FF	Feed forward
10	GND	Ground	20	Addin	Add In

# NJM2153



## APPLICATION CIRCUIT

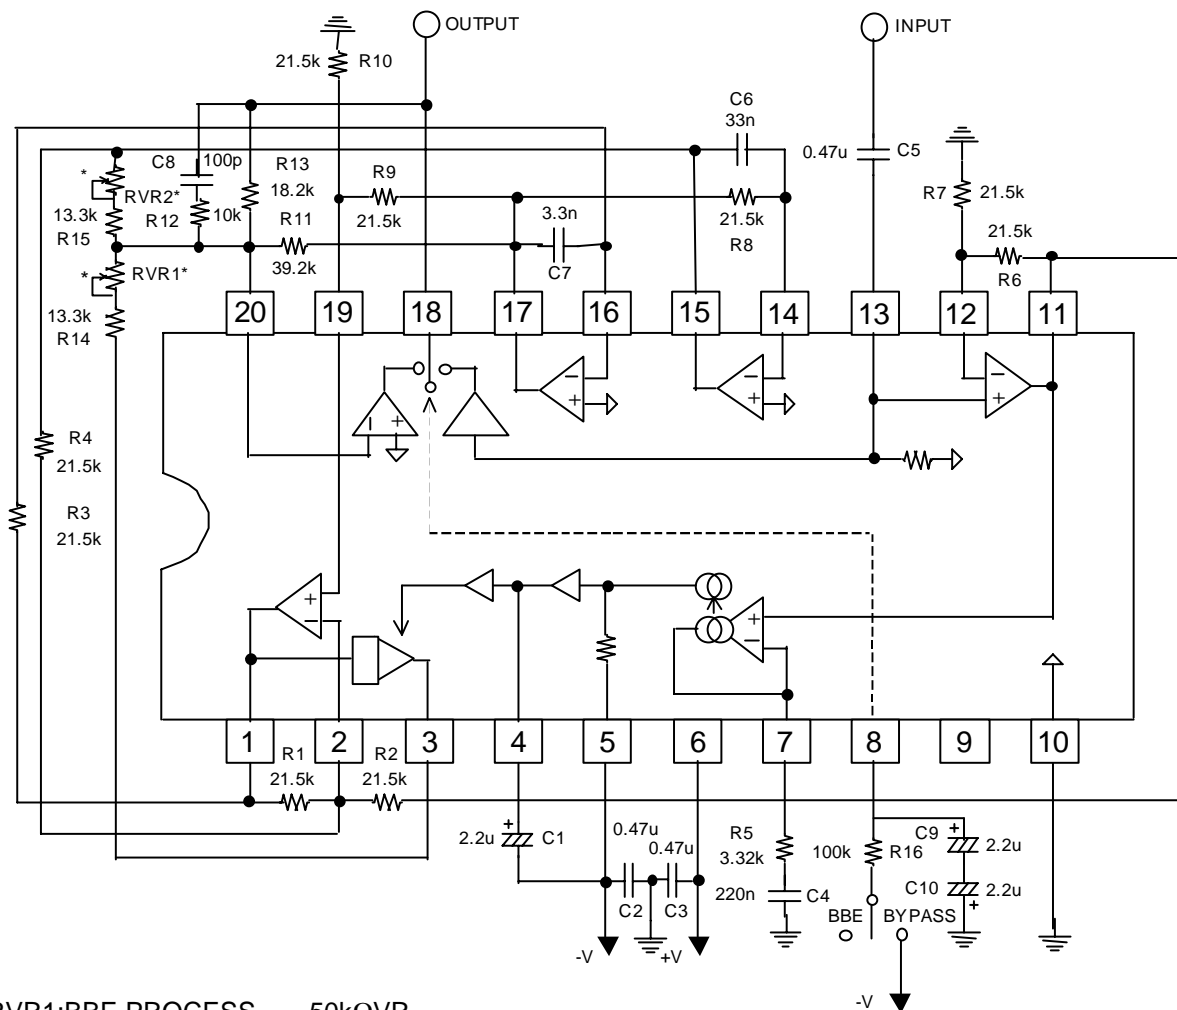

\* RVR1:BBE PROCESS 50kΩVR  
 RVR2:LO CONTOUR 50kΩVR  
 13.3kΩ=+12dB Boost

PART No.	VALUE	Tolerance	PART No.	VALUE	Tolerance
C1,C9,C10	2.2μF	±20%	R1,R2,R3,R4,R6,R7,R8	21.5kΩ	±1%
C2,C3,C5	0.47μF	±5%	R9,R10	21.5kΩ	±1%
C4	220nF	±5%	R5	3.32kΩ	±1%
C6	33nF	±5%	R11	39.2kΩ	±1%
C7	3.3nF	±5%	R12	10kΩ	±1%
C8	100pF	±5%	R13	18.2kΩ	±1%
			R14,R15	13.3kΩ	±1%
			R16	100kΩ	±1%

## ■ TYPICAL CHARACTERISTICS

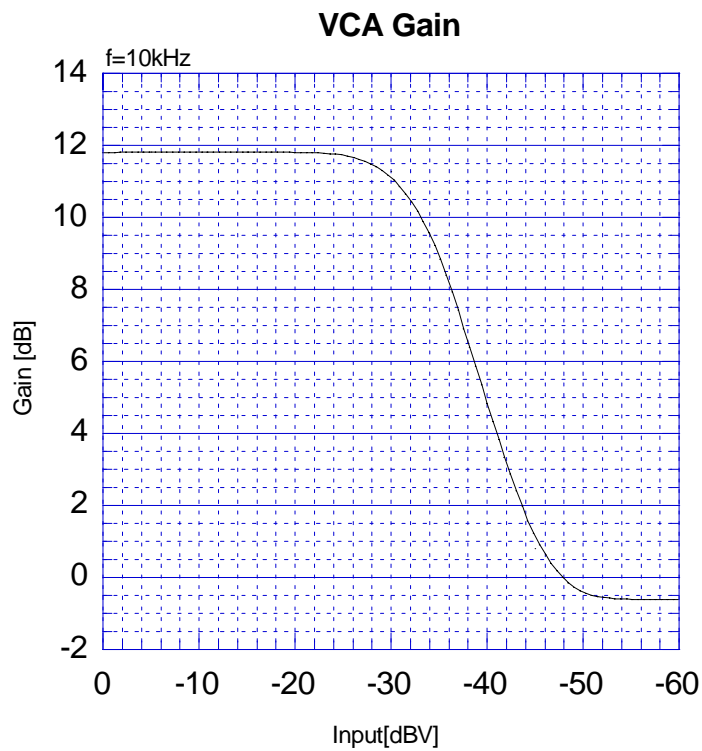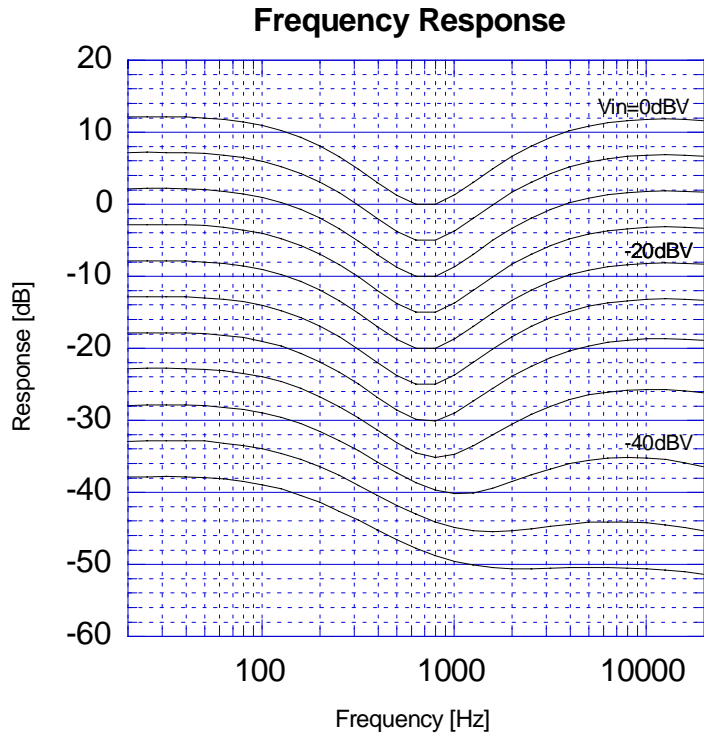

# NJM2153

---

## ■ NOTE

The **NJM2153** is manufactured by New Japan Radio Co.,Ltd under license from BBE Sound Inc. BBE is a registered trademark of BBE Sound Inc.

A license from BBE Sound Inc. is required before the **NJM2153** can be purchased from New Japan Radio Co.,Ltd.

BBE Sound, Inc.  
5381 Production Drive  
Huntington Beach, CA 92649  
Tel:(714)897-6766  
Fax:(714)896-0736

**[CAUTION]**

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.