
Technical Manual

Minigon



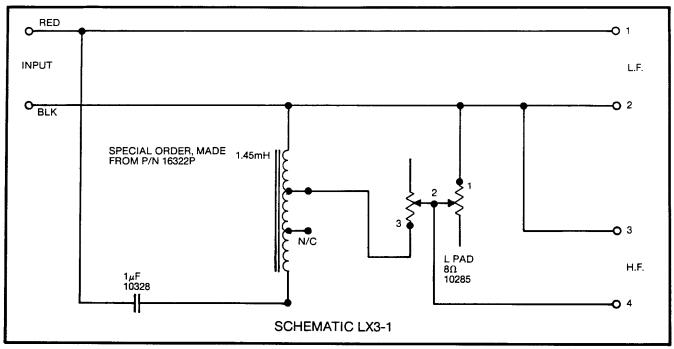

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER: LE10A
Cone Kit: C8RLE10A
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 6
Sweep Frequency Hz: 20-1200

D.C. Resistance Ohms: 4.4 min/5.0 max

Gap Gauge: .048"

Notes: Aquaplas On Cone.

Dome Inverted.

If Not Serviceable, Replace With: LE10H-1 Visual Change: Yes

Baffle Modification: No

Exact Acoustic Replacement: No. Slightly different.

Replace both units in a stereo pair. Additional Parts Currently Available*:

Dome: 21514
Mounting Gasket: 21770
Trim Gasket: 21813

HIGH FREQUENCY DRIVER: LE30
Diaphragm Kit: N/A

Nom. Impedance: 8 Ohm

HIGH FREQUENCY DRIVER (Cont'd)

Dynamic Test Input V: 3

Sweep Frequency Hz: 350-1200
D.C. Resistance Ohms: 5.4 min/6.6 max

Gap Gauge: N/A

Notes: Driver not serviceable.

Kit no longer available.

If Not Serviceable, Replace With: 035TiA
Visual Change: Yes
Baffle Modification: No

Exact Acoustic Replacement: No. Use as last resort. Replace both units in a stereo pair.

SYSTEM SPECIFICATIONS:

Nom. Impedance:

Rec. Amp Power Range:

Crossover Frequencies:

Sensitivity:

vity:

Enclosure Dim: Shipping Weight:

SYSTEM NOTES:

Scaled down two piece version of the Paragon. The Minigon could also be ordered with LE8T full range drivers installed.

Not Available

^{*}Other parts may also be available. Check with JBL for details.