



# S3S L,R

## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Handling: 250W
- Frequency Response: 32 Hz to 1 kHz (-3dB)
- Sensitivity: 92 dB SPL\*
- Crossover Frequency: N/A

### SYSTEM COMPONENTS:

- Cabinet: CS3S (Not For Sale)
- Grille: GS3S (76382)  
GS3S, Round (73880-01)
- Low Frequency Transducer: LE120H-1S 12 in. (300mm)  
Aquaplas-coated Fiber Cone (73851-02)
- DC Resistance: 6 ohm ±10%
- Crossover Network: N/A

### AURAL SWEEP TEST SPECIFICATIONS:

- A. Aural Sweep Test (In Enclosure): 6.0V Input, 20 Hz to 1 kHz
- B. Aural Sweep Test (No Enclosure): 4.0V Input, 20 Hz to 1 kHz

### PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 19.38 x 20.31 x 22.25 in. D  
(492mm x 516mm x 565mm D)
- Shipping Weight: 70 lbs. (31.7 kg.)

### WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

\*1 Watt @ 1 Meter

## PACKAGE

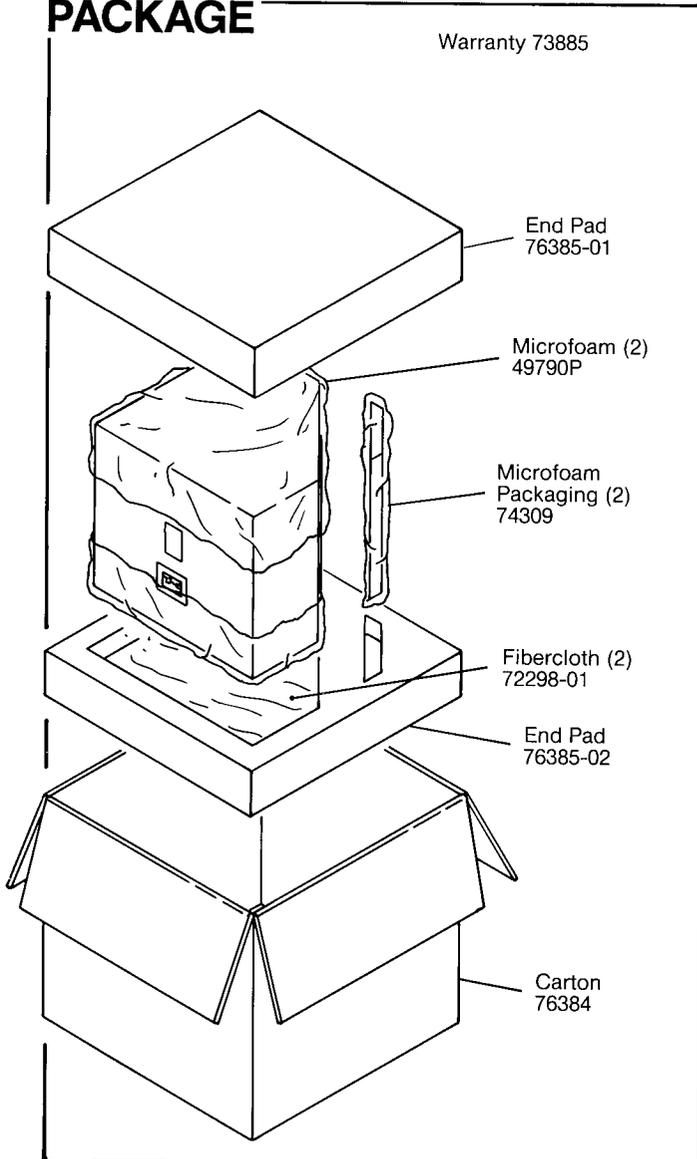

## WIRING DIAGRAM

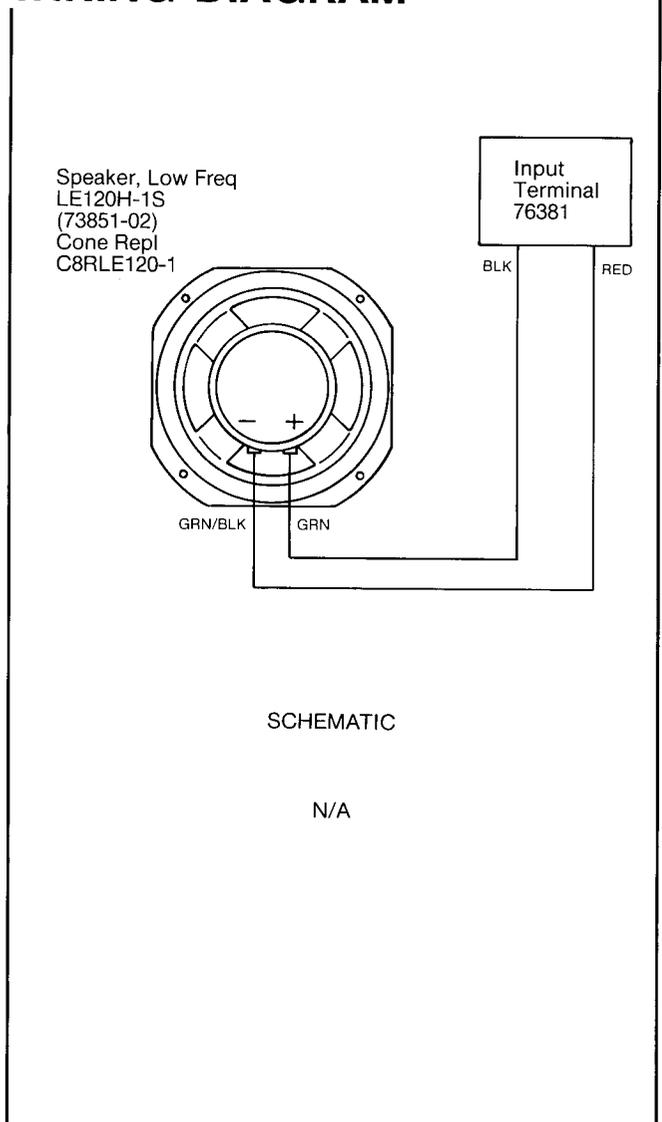


S3S L,R

# S3S L,R

## COMPONENT EXPLODED VIEW

**NOTE:** The S3S L,R is part of JBL's Synthesis Three home media system. The loudspeaker components in this system are covered by a 5 year "48 hour instant loaner policy" which is administered by the JBL dealer. Within the warranty period, all requests for service should be referred to the JBL dealer. If this is not practical, please contact JBL for immediate action.

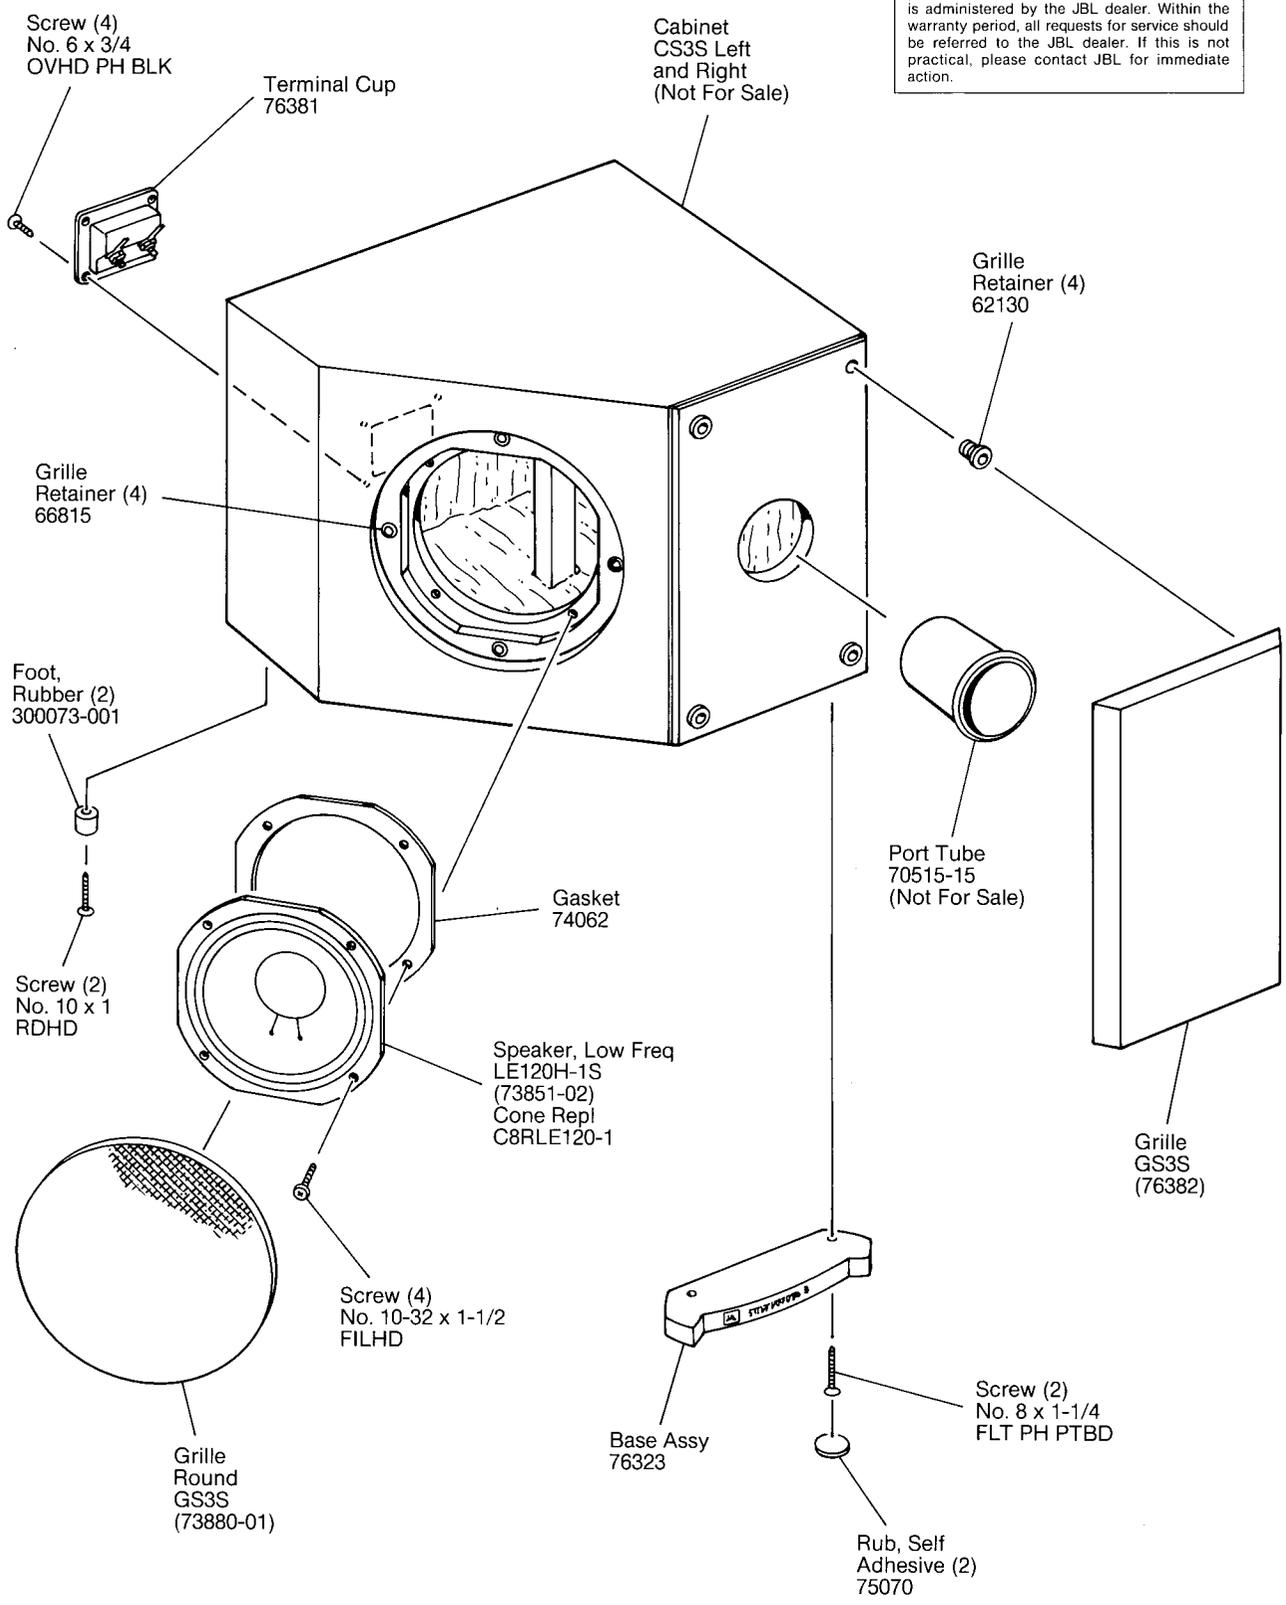

S3S L,R