


May 24, 1963

ELECTRONIC DESIGN

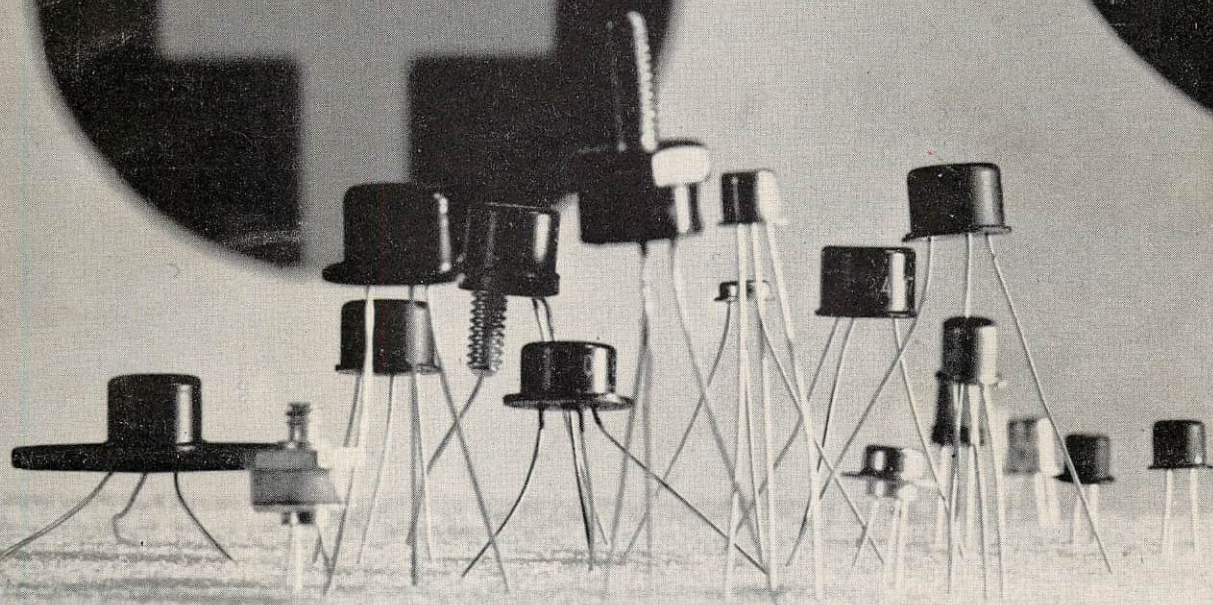

ELEVENTH ANNUAL TRANSISTOR DATA CHART


FASTEST TRANSISTORS FOR ALL COMPUTER REQUIREMENTS

FASTEST LOW LEVEL LOGIC

2N709
(NPN)

- SWITCHING TIME τ_s — 6 nsec max @ 5/5/5mA
- V_{sat} — 0.3V max @ $I_C = 3mA$ $I_B = .15mA$
- h_{FE} — 20 min @ $I_C = 10mA$ $V_{CE} = 0.5V$
- f_T — 600 MC min @ $I_C = 5mA$ $V_{CE} = 4V$

Package: TO-18




FASTEST LOGIC

2N2369
(NPN)

- SWITCHING TIME τ_s — 13 nsec max @ 10/10/10mA
- V_{sat} — 0.25V max @ $I_C = 10mA$ $I_B = 1mA$
- h_{FE} — 20 min @ $I_C = 100mA$ $V_{CE} = 2V$
- f_T — 500 MC min @ $I_C = 10mA$ $V_{CE} = 10V$

Package: TO-18




FASTEST CORE DRIVER

2N2845 SERIES
(NPN)

- SWITCHING TIME τ_s — 20 nsec @ 50/50/50mA
- V_{sat} — 1.0V max @ $I_C = 500mA$ $I_B = 50mA$
- h_{FE} — 20 min @ $I_C = 500mA$ $V_{CE} = 10V$
- f_T — 250 MC @ $I_C = 50mA$ $V_{CE} = 10V$

Package: TO-18, TO-5




FAIRCHILD

SEMICONDUCTOR

A DIVISION OF FAIRCHILD CAMERA AND INSTRUMENT CORPORATION

545 WHISMAN RD., MOUNTAIN VIEW, CALIF. • YORKSHIRE 8-8161 • TWX-415-969-9165

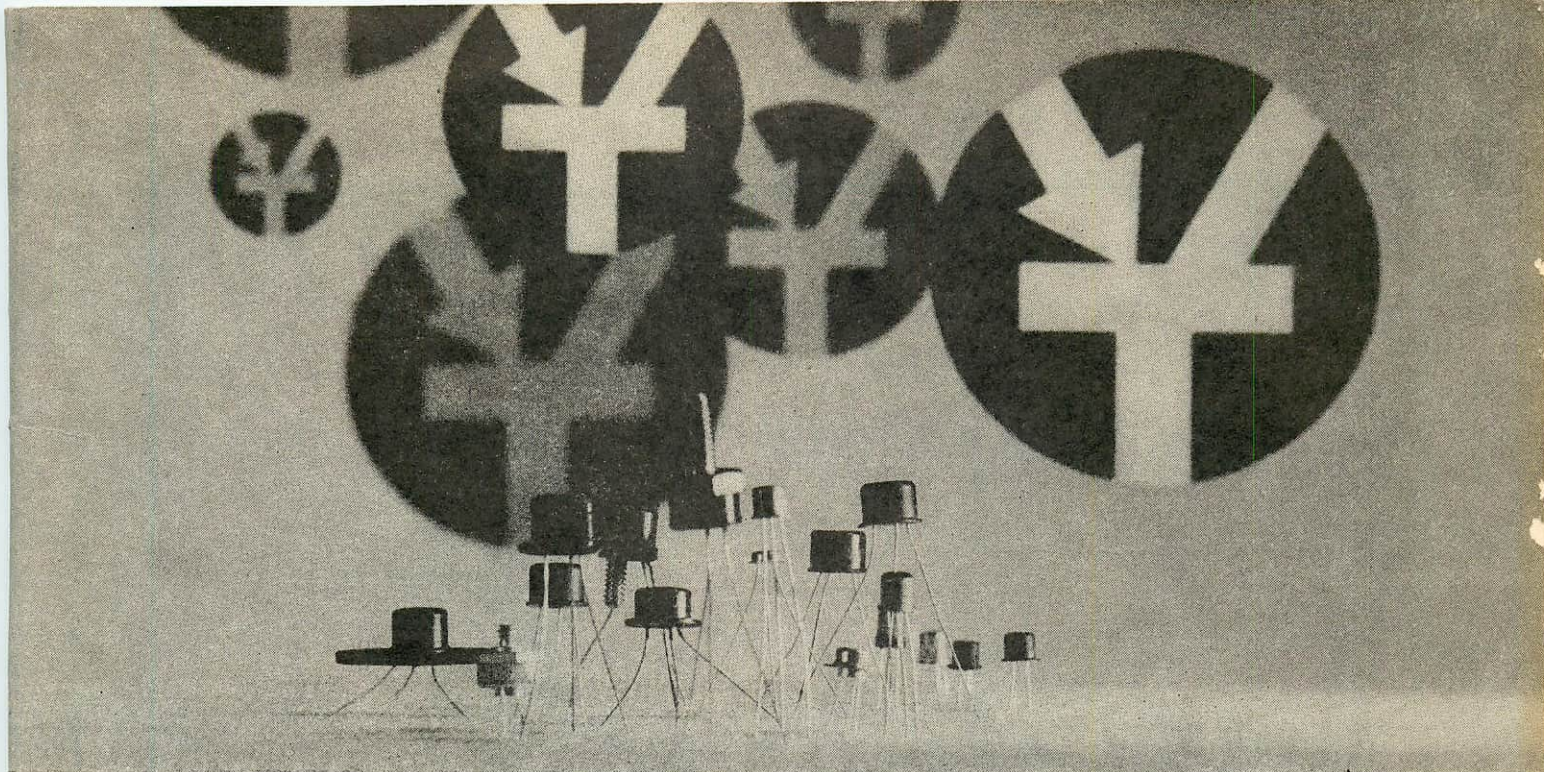

ELECTRONIC DESIGN'S ELEVENTH ANNUAL TRANSISTOR DATA CHART 1963

Donald Christiansen
Technical Editor

ELECTRONIC DESIGN's 11th Annual Transistor Data Chart includes more than 3,000 listings, of which about 375 appear for the first time.

Transistors are classified according to seven application categories: Audio and General Purpose (page T4), High-Frequency (page T16), Power (page T40), Low-Level Switching (page T62), High-Level Switching (page T77) and, for the first time, Field-Effect (page T85) and Unijunction (page T86).

Within each category, types are arranged in order of increasing value of a key design parameter. This also permits quick identification of close substitutes.


Alternate suppliers are listed in the "Remarks" column. The manufacturer whose data are listed is identified in the "Mfr." column. He is not necessarily the original registrant.

A cross index (page T88) identifies types in numerical sequence. Each type in the cross index carries a code that identifies its application category and specifies the block of 10 types in which it appears. A3, for example, means the type can be found in the third block of the Audio section.

Many manufacturers, upon request, provide detailed application notes and data sheets to the design engineer. Where this is true, it is noted next to the manufacturer's name in the list of manufacturers (page T1).

Update Your Transistor File

...In Two Easy Steps

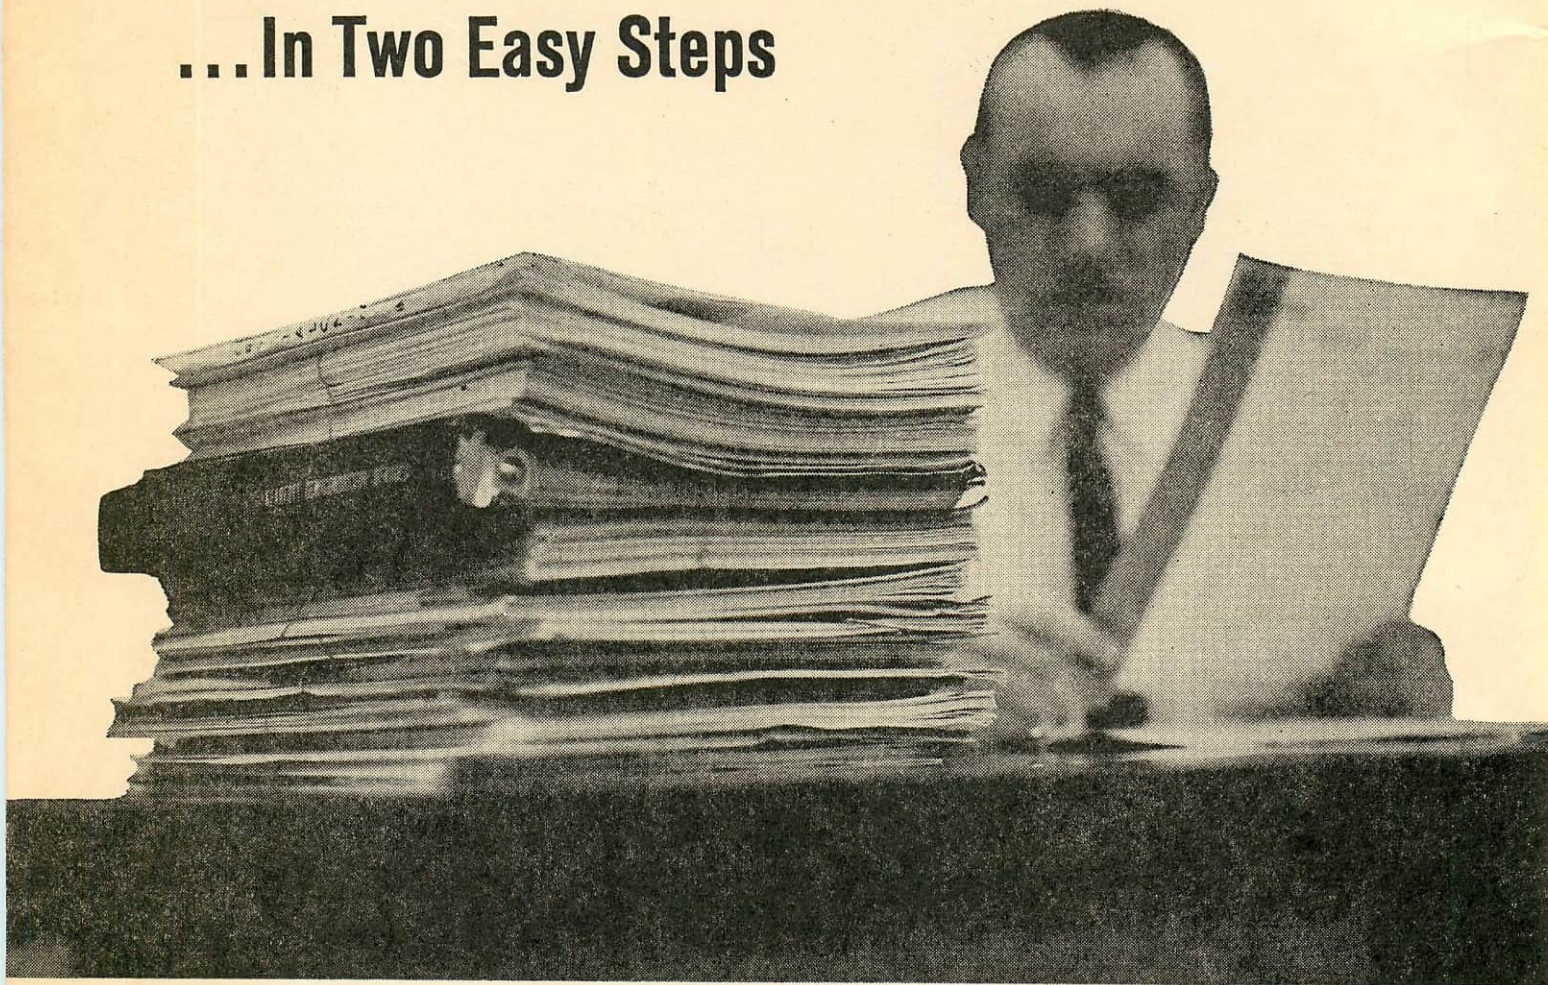

Step 1. Send for your personal copy of the 1963 Transistor Data Chart, Reader-Service No. 549. It has been tailored to meet your needs as a design engineer—to guide you in the rapid selection of transistors for a particular circuit need.

Step 2. Having narrowed the field to a number of similar types, your next step is to refer to manufacturers' specification sheets for exact test conditions, application details and other pertinent information.

But unless you have invested much time and effort on your transistor file, it is bound to contain obsolete types and overlook new ones.

So, to supplement the Data Chart, **ELECTRONIC DESIGN** has made special arrangements with semiconductor manufacturers to provide specification sheets and application notes to readers requesting this material. Merely circle the number alongside each manufacturer's name on the special Reader-Service card at the end of this section.

Transistor Manufacturers

Code	Company	Further Information Available	
		Type	Circle Reader-Service No.
AI	Amelco, Inc. 341 Moffett Blvd. Mountain View, Calif.	FET application notes, 20-page data folder, and other brochures	400
AMF	American Machine and Foundry Co. Leland Airborne Products Div. AMF Semiconductor Dept. Vandalia, Ohio	Data sheets on 38 transistor types	401
AMP	Amperex Electronic Corp. 230 Duffy Ave. Hicksville, L.I., N.Y.	Several condensed catalogs and application notes	402
BE	Bendix Semiconductor Div. South St. Holmdel, N.J.	Two guides to silicon and germanium transistors	403
CS	Clark Semiconductor Corp. Div. of National Semiconductor Walnut Ave. Clark, N.J.	Data sheets on transistors	404
CL	Clevite Transistor 200 Smith St. Waltham 54, Mass.	Condensed catalog and application notes	405
CT	Crystalonics, Inc. 249 Fifth St. Cambridge 42, Mass.	3-ring folder of data sheets and application notes	406
DE	Delco Radio Div. GM Corp. Kokomo, Ind.	Condensed catalog, data sheets, application notes and test data	407
FA	Fairchild Semiconductor 545 Whisman Road Mountain View, Calif.	Condensed catalog and data sheets	408
GE	General Electric Co. Semiconductor Products Dept. Electronics Park Syracuse 1, N.Y.	Condensed catalog, data sheets and application notes	409
GI	General Instrument Corp. 18 East 41st Street New York 17, N.Y.	Data sheets, tentative specifications and application notes	410
HW	Honeywell Semiconductor Products 2747 Fourth Ave. South Minneapolis 8, Minn.	Application notes, lab reports and data	411
HU	Hughes Semiconductor Div. 500 Superior Ave. Newport Beach, Calif.	Application selection guide, data sheets and brochures	412
IND	Industro Transistor Corp. 35-10 36th Ave. Long Island City 6, N.Y.	Condensed catalog, data sheets and application notes	413
KF	Kearfott Semiconductor Corp. 437 Cherry St. West Newton 65, Mass.	Loose leaf binder of semiconductor engineering data	414
MO	Motorola Semiconductor Products, Inc. 5005 E. McDowell Road Phoenix 8, Ariz.	Condensed catalog, data sheets and reliability brochure	415
NA	National Semiconductor Corp. 90 Rose Hill Ave. Danbury, Conn.	Condensed catalog, data sheets, engineering memos, application notes	416

Code	Company	Further Information Available	
		Type	Circle Reader-Service No.
PSI	Pacific Semiconductor, Inc. (TRW Electronics) 12955 Chadron Ave. Hawthorne, Calif.	Condensed catalog and data sheets	417
PH	Philco Corp. Lansdale Div. 504 Church Road Lansdale, Pa.	Transistor reference chart and planar reliability report	418
RCA	Radio Corp. of America Semiconductor Div. Somerville, N.J.	Condensed catalog, data sheets and application notes on many devices	419
RRD	Radio Development & Research Corp. 100 Pennsylvania Ave. Paterson 3, N.J.	Will not manufacture after 1963	
RA	Raytheon Co. Semiconductor Div. 350 Ellis St. Mountain View, Calif.	Condensed catalog	421
STC	Silicon Transistor Corp. 150 Glen Cove Road Carle Place, L.I., N.Y.	Condensed catalog	422
SI	Siliconix, Inc. Sunnyvale, Calif.	Application notes, data sheets and articles on FET devices	423
SSE	Solid State Electronics Corp. 15321 Rayen St. Sepulveda, Calif.	Data sheet on SST610 transistor	424
SSP	Solid State Products, Inc. One Pingree St. Salem, Mass.	Folder of data sheets and comparison chart	425
SSD	Sperry Semiconductor Div. Norwalk, Conn.	Data sheets and tentative specifications	426
SPR	Sprague Electric Co. 347 Marshall St. North Adams, Mass.	Condensed catalog	427
SY	Sylvania Semiconductor Div. 100 Sylvan Road Woburn, Mass.	Full catalog, data sheets and Circuit Loops brochures	428
TI	Texas Instruments Inc. 13500 North Central Expressway Dallas 22, Texas	Data sheets, application notes and theory of FET devices brochure	429
TR	Transitron Electronic Corp. 168-182 Albion St. Wakefield, Mass.	Data sheets, application notes, condensed catalog and an article reprint	430
TS	Tung-Sol Electric, Inc. One Summer Ave. Newark 4, N.J.	Condensed catalog, FET brochure and silicon double diffused brochure	431
WE	Western Electric Co., Inc. Marion and Vine St. Laureldale, Pa.	Available only to agencies of the U.S. Govt. and their subcontractors	
WH	Westinghouse Electric Corp. 3 Gateway Center Pittsburgh 30, Pa.	Condensed catalog, data sheets, application and design notes	433

HOW TO USE THE CHARTS

A color code pairs the transistor type with the value of its *key parameter*. Types are listed in order of increasing value of key parameter. Note, however, that since various manufacturers may characterize their types differently, some "jumps" may take place in the sequence. Consider, for example, a type in the high-frequency category. Its key characteristic will be f_{ae} , f_T , or f_{ab} (values of f_T are preceded by a single asterisk; values of f_{ab} , by a double asterisk). But f_{ae} is the frequency at which h_{fe} drops to 0.707 of its low frequency value, and f_T is the gain-bandwidth product, or the product of h_{fe} and frequency at a point where h_{fe} is dropping by 6 db per octave. Thus, f_T is about h_{fe} times greater than f_{ae} for a given transistor.

Under *maximum ratings*, manufacturers were asked to specify collector power dissipation at 25 C case temperature, this generally being the most meaningful single dissipation rating. The derating factor can then be used to estimate P_c for other operating temperatures.

Either V_{CEO} or V_{CBO} is listed as a maximum voltage rating. V_{CEO} is related to collector-emitter diode breakdown and V_{CBO} to collector-base diode breakdown. But bear in mind that many manufacturers' data sheets will list other important voltage ratings, such as V_{CES} or V_{CER} .

Under *characteristics*, ELECTRONIC DESIGN asked manufacturers to supply typical values rather than maxs or mins. Where deviations from this occur they are noted.

Finally, it must be cautioned that the characteristics listed are primarily a guide and generally cannot be used for direct comparison of types. This is because it is impossible to list the wide variety of test conditions under which characteristics have been measured. V_{CEO} , for example, can differ considerably for comparable devices when measured at a collector current of 100 μ a in one case and 1 ma in another. The best bet is to consult the manufacturers' data sheets before making the final selection.

Key to Symbols

f_{ae}	= small-signal short-circuit forward current transfer ratio cutoff frequency (common-emitter)
f_{ab}	= small-signal short-circuit forward current transfer ratio cutoff frequency (common-base)
f_T	= gain-bandwidth product
P_c	= collector power dissipation (average)
T_j	= junction temperature deg C
mw/°C	= derating factor
V_{CEO}	= max collector voltage, collector to emitter, base open
V_{CBO}	= max collector voltage, collector to base, emitter open
I_c	= max collector current
I_p	= max collector current (peak)
h_{fe}	= small-signal short-circuit forward current transfer ratio (common-emitter)
h_{FE}	= dc short-circuit forward current transfer ratio (common-emitter)
I_{CO}	= collector cutoff current (dc) emitter open
C_{oe}	= output capacitance (common-emitter)
C_{ob}	= output capacitance (common-base)
t_r	= rise time
t_s	= storage time
$V_{CE(sat)}$	= collector-to-emitter saturation voltage
g_m	= transconductance
V_P	= pinch-off voltage
I_{DSS}	= zero-bias drain current
BV_{DGO}	= drain-gate breakdown voltage with gate-source open-circuited
BV_{DGS}	= breakdown voltage from drain to gate with drain shorted to source
C_{is}	= common source short-circuit input capacitance
N.F.	= noise figure
η	= intrinsic standoff ratio
I_{EO}	= max emitter reverse current
I_p	= max peak point emitter current
$V_{E(sat)}$	= max emitter saturation voltage
V_{EB2}	= min emitter reverse voltage
V_{OB1}	= min base one peak pulse voltage

Key to Transistor Types

Construction			
AJ	Alloy junction	GD	Grown diffused
AD	Alloy diffused	GJ	Grown junction
DD	Double diffused	GR	Rate grown
DG	Grown diffused	MB	Meltback
DJ	Diffused junction	MD	Micro-alloy diffused base
DM	Diffused mesa	MS	Mesa
DDM	Double-diffused mesa	PE	Planar epitaxial
DP	Diffused planar	PL	Planar
DR	Drift	SBT	Surface barrier
ED	Electro-chemical diffused-collector	SP	Surface precision alloy
EM	Epitaxial mesa	TDP	Triple-diffused planar
EP	Epitaxial	Materials	
FA	Fused alloy	ge	germanium
FJ	Fused junction	si	silicon

Manufacturers and their Lines

Manufacturer	Audio (A)	High-Frequency (HF)	Power (P)	Low-Level Switching (LL)	High-Level Switching (HL)	Field-Effect (FE)	Uni-junction (UNJ)
Amelco		•		•		•	
AMF			•				
Amperex	•	•	•	•	•		
Bendix	•		•	•	•		
Clark			•				
Clevite		•	•	•	•		
Crystalonics				•		•	
Delco			•		•		
Fairchild		•	•	•	•		
General Electric	•	•	•	•	•	•	•
General Instrument	•	•	•	•	•		
Honeywell		•	•				
Hughes	•	•		•	•		
Industro	•	•	•	•	•		
Kearfott	•	•	•	•	•		
Motorola	•	•	•	•	•	•	
National Semiconductor	•	•	•	•			
Philco	•	•		•	•		
PSI		•	•		•		
Radio Development	•						
Raytheon	•	•	•	•	•		
RCA	•	•	•	•	•	•	
Silicon Transistor			•		•		
Siliconix						•	
Solid State Electronics	•			•			
Solid State Products					•		
Sperry	•	•		•			
Sprague	•	•		•			
Sylvania	•	•	•	•			
Texas Instruments	•	•	•	•	•		•
Transitron	•	•	•	•	•		
Tung-Sol	•	•	•	•	•	•	
Western Electric	•	•	•	•	•		
Westinghouse			•		•		

AUDIO AND GENERAL PURPOSE

Mostly audio and general-purpose types below one watt. In order of increasing forward-current transfer ratio.


Cross Index Key	Type No.	Mfr.	Type	h_{fe} * h_{FE} ** G_m	MAX. RATINGS				CHARACTERISTICS						Remarks
					P_c (mw)	T_i (°C)	$m_w/°C$	V_{CEO} * V_{CBO} (v)	I_C (ma)	I_{CO} (μ a)	NF (db)	C_{oe} * C_{ob} (pf)	f_{ae} * f_T ** f_{ab} (mc)		
A 1	2N160	RRD	npn, GJ, si	0.93	150	175	—	*40	25	0.2	25	7	4		
	2N160A	RRD	npn, GJ, si	0.93	150	175	—	*40	25	0.2	25	7	4		
	2N349	RRD	npn, GJ, si	0.95	750	175	—	*125	40	10	—	—	3		
	2N161	RRD	npn, GJ, si	0.96	150	175	—	*40	25	0.2	25	7	5		
	2N161A	RRD	npn, GJ, si	0.96	150	175	—	*40	25	0.2	25	7	5		
A 2	2N348	RRD	npn, GJ, si	0.96	750	175	—	*90	50	10	—	—	3	TR, NA	
	2N1096	RRD	npn, GJ, si	0.96	500	175	—	*90	30	6	—	—	3		
	2N347	RRD	npn, GJ, si	0.98	750	175	—	*60	60	10	18	7	3		
	2N1095	RRD	npn, GJ, si	0.98	500	175	—	*60	40	5	—	—	3		
	2N163	RRD	npn, GJ, si	0.99	150	175	—	*40	25	0.2	25	7	6		
	2N163A	RRD	npn, GJ, si	0.99	150	175	—	*40	25	0.2	25	7	6		
	2N1566	TI	npn, MS, si	1.2	—	175	80	60	100	1	50	—	—		
	2N2673	GE	npn, GD, si	*8-22	250	185	1.66	*60	25	0.004	11	4	10		
	2N1154	NA	npn, DM, si	9	750	150	5	50	60	5	—	—	—		
	2N1155	NA	npn, DM, si	9	750	150	5	80	50	6	—	—	—		
A 3	2N1156	NA	npn, DM, si	9	750	150	5	120	40	8	—	—	—	TI, USN GE, TR, RRD, NA, RA, AMP GE, TI NA, TI NA, SO NA, TI, AMP NA, TI, AMP NA, TI, AMP	
	2N117	TI	npn, GR, si	9-20	150	175	1	*30	25	2	20	—	4		
	2N332	TI	npn, GR, si	9-20	150	175	1	45	25	2	20	—	6		
	2N332A	NA	npn, MS, si	9-20	150	175	0.86	45	—	2	—	30	—		
	2N333A	NA	npn, MS, si	9-20	500	175	2.8	45	—	0.5	—	15	—		
	2N1149	TR	npn, DJ, si	9-20	150	150	—	*45	25	0.1	25	7	7		
	2N243	TI	npn, GJ, si	9-32	750	150	6	60	60	1	—	—	7		
	2N470	TR	npn, GJ, si	10-25	200	200	—	15	25	0.02	22	7	8		
	2N471	TR	npn, GJ, si	10-25	200	200	—	30	25	0.02	22	7	8		
	2N472	TR	npn, GJ, si	10-25	200	200	—	45	25	0.02	22	7	8		
A 4	2N472A	TR	npn, DG, si	10-25	200	200	—	45	25	0.02	22	7	8	NA, TI audio/med. power Sub min Sub min NA	
	2N102/13	SY	npn, AJ, ge	10.5	1w	75	20	*30	1.5a	5ma	—	—	—		
	2N144/13	SY	npn, AJ, ge	10.5	1w	75	20	*60	0.8a	5ma	—	—	—		
	2N1439	NA	npn, AJ, si	12	400	200	2.28	50	100	0.01	12	25	1		
	2N756	NA	npn, DM, si	12-20	500	200	2.5	45	—	9.2	—	—	—		
	2N756A	NA	npn, DM, si	12-20	500	200	2.5	60	—	0.1	—	—	—		
	2N2674	GE	npn, GD, si	*12-40	250	185	1.66	*60	25	0.004	11	4	11		
A 5	CK64B	RA	npn, AJ, ge	13.5	75	85	1.25	45	100	10	—	—	—	NA TR audio/med. power	
	CK64C	RA	npn, AJ, ge	13.5	75	85	1.25	45	100	10	—	—	—		
	2N935	SSD	npn, AJ, si	14	385	160	2.85	40	50	0.005	18	70	2		
	2N284	AMP	npn, AJ, ge	15	125	75	2.5	*32	125	4.5	—	—	—		
	2N284A	AMP	npn, AJ, ge	15	125	75	2.5	*60	125	4.5	—	—	—		
	2N339A	TR	npn, DJ, si	15	1000	200	8	55	1	—	—	—	—		
	2N340A	TR	npn, DJ, si	15	1000	200	8	85	0.1	1	—	—	—		
	2N341A	TR	npn, DJ, si	15	1000	200	8	*125	0.1	1	—	—	—		
	2N927	NA	npn, AJ, si	15	150	200	2.5	70	—	.005	—	12	.8		
	2N938	SSD	npn, AJ, si	15	250	175	1.7	35	100	.001	—	7	1		
A 6	2N1247	NA	npn, DM, si	15	30	150	0.2	6	5	1.5	—	12	—	AMP matched npn, npn	
	2N1249	TR	N-GJ	15	30	—	—	6	5	0.002	—	8	5		
	2N1440	NA	npn, AJ, si	15	400	200	2.28	50	100	0.01	12	25	1		
	2N1623	RA	npn, AJ, si	15	250	160	0.54	20	50	.005	18	70	.1		
	2N1655	RA	npn, AJ, si	15	250	160	0.54	*125	50	.005	18	70	.2		
	BC212	AMP	si	15	250	150	2	*60	50	0.01	8	50	1		
	TR34	IND	npn, AJ, ge	15	120	85	3	40	150	10	15	15	1.6		
	2N2391	TI	P, si	*15-45	1000	—	—	20	30	—	—	—	—		
	TS601	TS	npn, AJ, ge	*15-60	200	100	—	*12	400	20	—	—	—		
	TS603	TS	npn, AJ, ge	*15-60	200	100	—	*20	400	20	—	—	—		
A 7	2N925	NA	npn, AJ, si	16	150	200	2.5	50	—	.005	—	12	.8	TI TR GE, TR, NA, RA, AMP	
	2N529	GI	*	17	100	85	2	*15	—	3	14	14	—		
	2N756A	TR	N-M	17	500	—	0.30	60	100	0.1	—	5	100		
	2N1277	TR	N-GJ	*18	150	—	1.00	*40	25	—	—	5	15		
	2N1584	TR	N-GJ	18	150	—	1.00	60	25	—	—	5	5		
	2N1586	TR	npn, GJ, si	*18	150	150	1.33	15	50	0.5	20	*2	15		
	2N1587	TR	N-GJ	18	150	—	1.00	30	25	—	—	5	5		
	2N1588	TR	npn, GJ, si	*18	150	150	1.33	60	50	0.5	20	*2	15		
	2N334A	NA	npn, MS, si	18-36	500	175	2.8	45	—	0.5	15	—	—		
	2N757	NA	npn, MS, si	18-36	500	200	2.5	45	—	0.2	—	—	—		
2N757A	NA	npn, MS, si	18-36	500	200	2.5	60	—	0.1	—	—	—			
2N118	TI	npn, GR, si	18-40	150	175	1	*30	25	2	20	—	5			
2N333	TI	npn, GR, si	18-40	150	175	1	45	25	2	20	—	8			

A continued

Cross Index Key	Type No.	Mfr.	Type	h_{fe} * h_{FE} * G_m	MAX. RATINGS				CHARACTERISTICS					Remarks
					P_c (mw)	T_j (°C)	$m_w/°C$	V_{CEO} * V_{CBO} (v)	I_C (ma)	I_{CO} (μ a)	NF (db)	C_{oe} * C_{ob} (pf)	f_{re} * f_T * f_{ab} (mc)	
A 8	2N1150	NA	npn, DM, si	18-40	150	175	0.86	45	25	2	—	7	1	TI
	2N334	TI	npn, GR, si	18-90	150	150	1	45	25	2	20	—	10	GE, TR, NA, RA, AMP
	2N758	NA	npn, MS, si	18-90	500	200	2.5	45	—	0.2	—	—	—	—
	2N759A	NA	npn, DM, si	18-90	500	200	2.5	60	—	0.1	—	—	—	—
	2N1151	NA	npn, DM, si	18-90	150	175	0.86	*45	25	2	—	7	8	TR, TI
	2N129	SPR	ppn, AJ, ge	20	30	85	—	*3	5	—	—	—	30	—
	2N923	NA	ppn, AJ, si	20	150	200	2.5	40	—	.005	—	12	.8	—
	2N1051	WE	npn, DD, si	20	600	150	0.25	60	—	0.1	—	8	70	US MIL only
A 9	2N1248	TR	N-GJ	20	30	—	—	6	5	0.002	—	8	5	NA
	2N1670	GI	ppn, DR, ge	20	120	85	2	*100	—	3	—	3	—	HI-volt switch
	2N2551	HU	ppn, A, si	*20	400	160	3.0	150	200	0.1	6	90	1.0	—
	BC210	AMP	si	20	250	150	2	*25	50	0.001	8	50	1	—
	ST1506	TR	N-M	*20	30	—	0.50	6	—	—	—	—	—	—
	ST1543	TR	N-M	20	30	—	—	6	5	0.002	—	8	5	—
	TN1839	TR	npn, MESA, si	20-45	100amb	175	0.66	45	50	0.1 μ a	—	*8	50	—
	2N475A	TR	npn, DG, si	20-50	200	200	—	45	25	0.02	20	7	10	—
A 10	2N475A	MO	ppn, AJ, ge	20-50	200	100	2.67	*105	200	25	—	25	0.5	TI
	2N2042A	MO	ppn, AJ, ge	20-50	200	100	2.67	*105	200	25	—	25	0.5	*Meg-A-Life*, TI
	2N761	NA	npn, DM, si	20-55	500	200	2.5	45	—	.2	—	—	—	—
	TMT7247	TR	npn, PL, si	*20-50	150amb	175	1.0	40	50	0.01 μ a	4	*6	50	—
	2N406	SY	ppn, AJ, ge	20-80	150	75	3	*20	35	14	—	—	250	—
	2N330	GI	ppn, AJ, ge	22	100	85	2	*15	3	14	3	—	—	*matched ppn, npn
	TR722	IND	ppn, AJ, ge	22	150	2.5	3	45	200	10	15	20	2.5	micromin
	CK64A	RA	ppn, AJ, ge	22.5	80	85	—	20	100	2	6-5	—	1.2	micromin
A 11	2N2675	GE	npn, GD, si	*22-76	250	185	1.66	*60	25	0.004	11	*4	13	—
	2N186A	GE	ppn, AJ, ge	24	200	85	4	25	200	16	—	40	0.8	—
	2N189	GE	ppn, AJ, ge	24	75	85	2	25	50	15	15	40	0.8	—
	2N1150	TR	npn, GJ, si	*24	150	150	1.33	45	50	0.5	20	*2	15	—
	2N1476	SSD	ppn, AJ, si	24	250	175	1.7	100	100	.05	—	7	1	—
	2N381	SY	ppn, AJ, ge	24-45	200	85	3.3	*25	200	20	—	—	10	TI
	2N44	SY	ppn, AJ, ge	25	240	100	4	45	300	16	6	40	1	MIL, GI
	2N229	SY	ppn, AJ, ge	25	180	85	3	10	100	100	8	—	600	NA
A 12	2N330A	SSD	ppn, AJ, si	25	385	2.85	0.3	*45	30	.005	—	—	0.5	TI
	2N480	TS	ppn, AJ, ge	25	200	100	0.3	—	15	—	—	—	—	—
	2N584	IND	ppn, AJ, ge	25	150	85	2.5	30	300	3	12	20	0.8	US, GI
	2N592	TI	ppn, AJ, ge	25	150	100	0.2	*20	5	.007	—	35	0.4	Bilateral, TI
	2N726	GI	ppn, DM, si	25	1w	175	—	25	50	—	—	—	—	—
	2N1265	SY	ppn, AJ, ge	25	50	85	0.9	*10	100	100	—	—	600	audio/med. power
	2N1441	NA	ppn, AJ, si	25	400	200	2.28	50	100	0.01	12	25	1	—
	2N524A	MO	ppn, AJ, ge	25-42	225	100	3	*45	500	10	15	40	5	*Meg-A-Life*
A 13	2N1101	SY	ppn, AJ, ge	25-50	180	75	3.6	*20	100	50	—	—	0.01	RCA
	2N1102	SY	ppn, AJ, ge	25-50	180	75	3.6	*40	100	50	—	—	0.01	Driver, TI
	2N34	SY	ppn, AJ, ge	25-125	180	75	3	*40	100	50	—	—	0.01	Driver, TI
	2N35	SY	npn, AJ, ge	25-125	180	85	3	*40	100	50	—	—	—	—
	2N306	SY	npn, AJ, ge	25-125	180	85	3	*20	100	100	—	—	0.6	IND, RA, US, GI, TI
	2N464	MO	ppn, AJ, ge	26	250	175	2.5	*45	100	6	—	7	1	NA
	2N1474	SSD	ppn, AJ, si	26	250	175	1.7	60	100	.005	—	—	0.7	—
	2N531	GI	ppn, AJ, ge	27	100	85	2	*15	—	3	14	14	—	*matched ppn, npn
A 14	CK65B	RA	ppn, AJ, ge	27	75	85	1.25	45	100	10	—	—	—	Sub min
	CK65C	RA	ppn, AJ, ge	27	75	85	1.25	45	100	10	—	—	—	Sub min
	2N936	SSD	ppn, AJ, si	28	385	160	2.85	35	50	.005	18	70	.3	NA
	2N244	TI	npn, GJ, si	28-90	750	160	6	60	60	1	—	5	8	NA
	2N757A	TR	N-M	29	500	—	0.30	60	100	0.1	—	—	100	—
	2N279	AMP	ppn, AJ, ge	30	125	75	2.5	*30	10	110	10	—	0.15	—
	2N524	SY	ppn, AJ, ge	30	225	100	3	*45	500	10	—	15	2	GE, MO, TI
	2N594	GI	ppn, AJ, ge	30	150	85	1.67	*20	2	.001	16	2	2	Bilateral, TI
A 15	2N939	SSD	ppn, AJ, si	30	250	175	1.7	35	100	.001	—	—	—	—
	2N1446	IND	ppn, AJ, ge	30	200	85	3.33	45	400	5	6	20	2	—
	2N1474A	SSD	ppn, AJ, si	30	250	175	1.7	60	100	.005	—	7	2	—
	2N1654	RA	ppn, AJ, si	30	250	160	0.54	*80	50	.005	18	70	.2	—
	2N1656	RA	ppn, AJ, si	30	250	160	0.54	*125	50	5	18	70	.2	—
	2N2428	AMP	ppn, AJ, ge	30	165	75	0.3	*32	100	—	4	50	1.7	—
	2N531	MO	ppn, AJ, ge	30-70	75	85	1.2	*30	1	—	20	—	4	—
	2N727	TI	ppn, PE, si	*30-90	1000	—	—	20	50	—	—	—	—	—
A 16	2N1372	SY	ppn, AJ, ge	30-90	150	100	2	*25	200	100	—	—	—	—
	2N1373	SY	ppn, AJ, ge	30-90	150	100	2	*45	200	100	—	—	—	—
	2N2392	TI	P, si	*30-90	1000	—	—	20	30	—	—	—	—	—
	2N2711	GE	npn, P, si	*30-90	200	100	2.67	*18	100	—	2.8	*9	—	—
	ST1242	TR	N-GJ	30	200	—	0.80	*40	50	75	—	4	10	—
	2N1654	RA	ppn, AJ, si	30	250	160	0.54	*80	50	.005	18	70	.2	—
	2N1656	RA	ppn, AJ, si	30	250	160	0.54	*125	50	5	18	70	.2	—
	2N2428	AMP	ppn, AJ, ge	30	165	75	0.3	*32	100	—	4	50	1.7	—

Now 1~ to 14gc low-noise


10 DECADES OF LOW-NOISE DEVICES

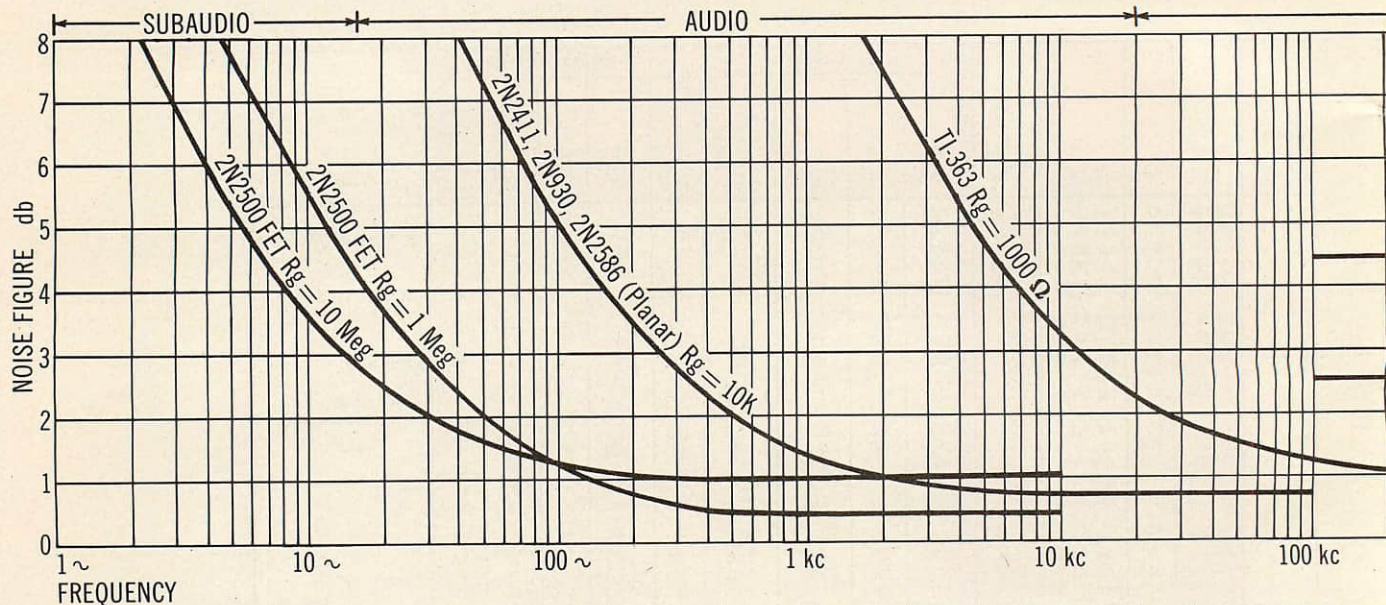

The units plotted here are representative of a broad range of over 100 low-noise devices TI offers for your low-noise applications.

Low-noise devices for your SUBAUDIO CIRCUITS

Texas Instruments 2N2497-2500 series field-effect transistors give the design engineer extremely low-noise characteristics — as low as 5 db at 10 cycles. They are ideal for such low-frequency equipment as null-detection apparatus, medical research equipment, oscillographic and magnetic tape recorders, oscilloscopes and all types of low-level transducers. ■ The circuit below illustrates how Texas Instruments 2N2500 silicon field-effect transistors are used to achieve low-noise, low-frequency operation.

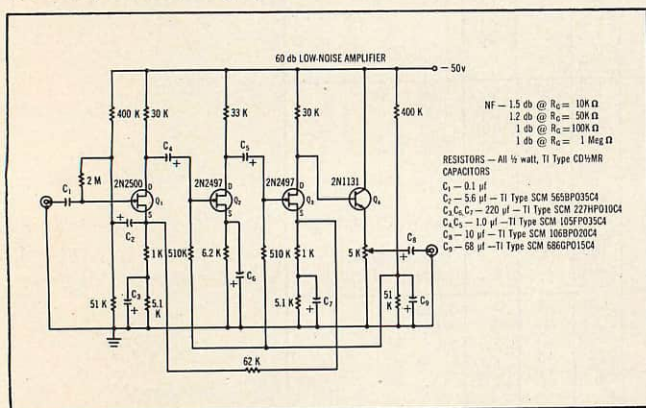


This circuit gives you a maximum voltage gain of 60 db ± 0.5 db from -55°C to 125°C with built-in gain adjustment. You also get good low-frequency response and stable circuit operation. ■ Write for your technical information file on low-noise TI devices for your subaudio applications.

TI cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.

Low-noise devices for your AUDIO CIRCUITS

Now you can design the low-level, high-gain amplifier shown below with typical noise figure as low as 1 db. Advanced low-level planar technology of Texas Instruments 2N929 and 2N2586 transistors makes possible high gain at low current levels, plus the extremely low leakage currents necessary for true low-noise performance.

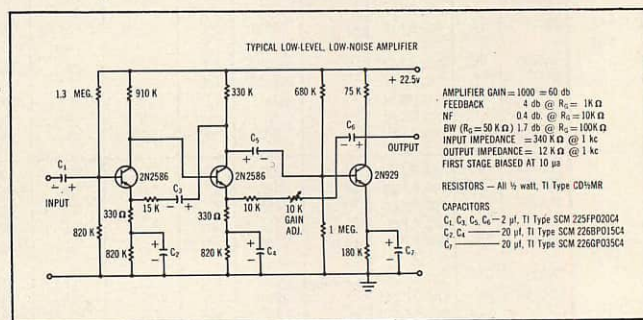


For high-impedance transducer applications, TI 2N930 and 2N2586 devices permit typical 1 db noise figure at emitter currents below 1 microampere, and generator resistances over 1 megohm. These special characteristics allow direct coupling of low-level, high-impedance sources...advantages previously available only with vacuum tubes and field-effect transistors. High gain at low levels plus very thin regions in these units combine to offer low power consumption and high radiation resistance to make the 2N930 and 2N2586 ideal for space applications. ■ A technical information file on almost 50 TI low-noise devices for audio circuits is yours upon request.

SEMICONDUCTOR COMPONENTS
DIVISION



solid-state amplification


FROM TEXAS INSTRUMENTS

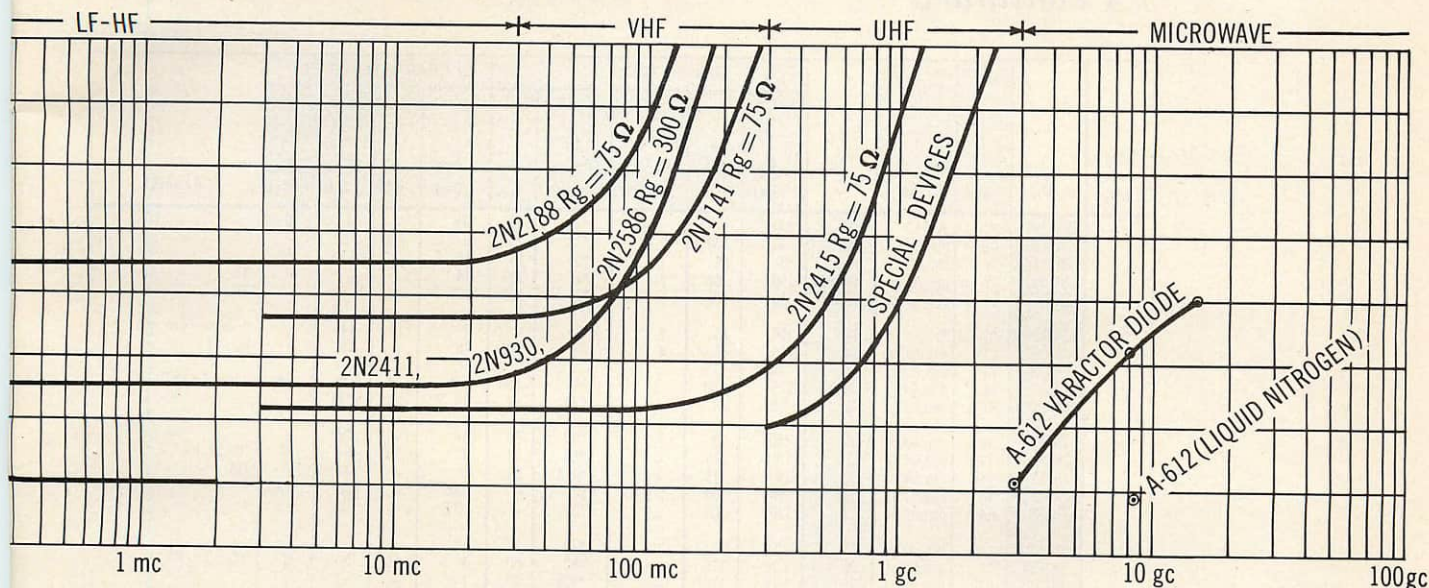

Figures shown are not theoretical; all are achieved measurements from actual circuit operation.

Low-noise devices for your LF-UHF CIRCUITS

For your low-noise, high-frequency receiver and preamplifier applications, TI 2N2415 germanium mesa transistors give you a typical noise figure of 2.4 db at 200 mc, maximum available gain of 15.5 db at 500 mc with a f_{MAX} of 3 gc. In the following circuit, HRB-Singer, Inc. utilizes 2N2415 transistors and "multiple feedback" techniques to achieve a uniform low noise figure, nominally 6 db, over the entire frequency range of 300 to 1000 mc with an average gain of 35 db. Unique design provides stable operation over a temperature range of -30° to $+70^{\circ}$ C and eliminates the need for RF tuning capacitors.

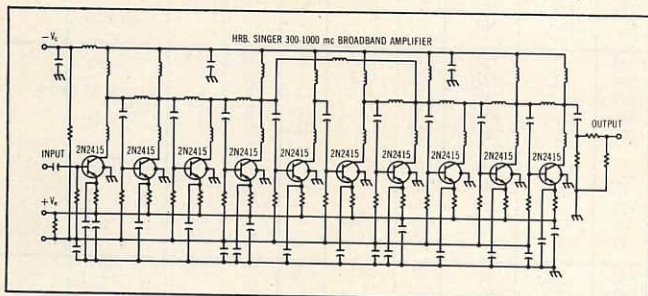

Another line of TI low-noise communications devices is the Dalmeida 2N2188 and TI363 series of germanium alloy diffused mesa transistors. These advanced units offer you ultra-high performance from dc to 100 mc, typical mid-frequency noise figures of less than 2 db, and increased high-frequency stability through guaranteed maximum output capacitance of 2.8 pf at 9 volts. Investigate TI's wide selection of low-noise transistors for LF-UHF circuits by writing for a free fact file on these devices.


Low-noise devices for your MICROWAVE CIRCUITS

Now you can design microwave circuits for highest frequencies at lowest noise with the new GaAs Pill Varactor Diode from Texas Instruments. These new subminiature devices offer you minimum cutoff frequency of 90 gc to 150 gc at -2 volts with low junction capacitance $-C_j$ @ 0 bias from 0.15 to 0.75 pf. Your production-line requirements for identical plug-in units are met through tight control of junction and package characteristics. These features offer you the lowest package capacitance and inductance in industry today — backed up with TI varactor manufacturing capacity to meet your tightest production schedules. TI GaAs Pill Varactor Diodes are particularly applicable to low-noise parametric amplifiers, harmonic generators, microwave switches, sub-harmonic oscillators, phase shifters and parametric limiters.

FOR FULL INFORMATION...

... write for a fact-filled file of technical data on low-noise TI devices designed for application in your frequency range. Please address your card or letter to Department 605 and specify which of these four information files you desire.

1. SUBAUDIO
2. AUDIO
3. LF-UHF
4. MICROWAVE

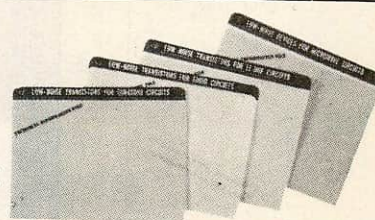

TEXAS INSTRUMENTS
INCORPORATED
13500 N. CENTRAL EXPRESSWAY
P. O. BOX 5012 • DALLAS 22, TEXAS

Ask your authorized TI distributor about "Transistor Circuit Design," an informative new hardbound book for circuit designers authored by 32 TI engineers and published by McGraw-Hill.

19605

May 24, 1963

T7

A continued

Cross Index Key	Type No.	Mfr.	Type	h _{FE} *h _{FE} **G _m	MAX. RATINGS				CHARACTERISTICS					Remarks
					P _c (mw)	T _j (°C)	T _i (°C)	V _{CEO} +V _{CB0} (v)	I _C (ma)	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} **f _{ab} (pF)	f _{ce} *f _T **f _{ab} (mc)	
A 15	2N1243	TR	N-GJ	*30	200	—	—	*40	50	75	—	4	10	TI
	2N2715	GE	npn, P, si	*30-90	200	100	85	*18	25	0.05μa	2.8	*5	250	TI
	2N1432	SY	npn, DO, ge	30-120	80	85	100	*35	10	15	—	—	—	—
	2N1380	SY	npn, AJ, ge	30-300	150	100	100	*15	200	14	—	—	—	—
	2N1381	SY	npn, AJ, ge	30-300	150	100	100	*25	200	100	—	—	—	—
A 16	2N532	GI	*	32	100	85	85	*15	—	3	14	14	2	* matched npn, npn
	2N319	GE	npn, AJ, ge	34	225	85	85	20	200	16	—	25	—	MO, TI
	2N444A	MO	npn, AJ, ge	34-65	240	100	100	*45	500	10	15	40	5.5	"Meg-A-Life"
	2N525A	GE	npn, AJ, ge	34-65	225	71	—	*20	35	14	—	*35	—	—
	2N405	RCA	npn, AJ, ge	35	150	71	—	*20	35	14	—	*35	—	—
A 17	2N406	RCA	npn, AJ, ge	35	150	71	—	*20	35	14	—	*35	—	TO-18, NA
	2N734	TR	npn, MS, si	35	1.0	175	—	*80	50	1	20	5	—	NA
	2N738	TR	npn, DM, si	35	1w	175	—	*125	35	1	—	—	—	—
	2N926	NA	npn, AJ, si	35	150	200	2.5	50	—	.005	—	12	0.8	—
	2N928	NA	npn, AJ, si	35	150	200	2.5	70	—	.005	—	12	0.8	—
A 18	2N1010	RCA	npn, AJ, ge	35	20	—	—	*10	2	10	5	—	*2	TO-5 TR, NA
	2N1564	TI	npn, MS, si	35	1.2	175	—	*80	50	1	20	5	50	—
	2N1572	TR	npn, DM, si	35	1.2w	175	—	*125	50	1	—	—	—	—
	2N2617	AMP	npn, si	35	250	150	2	*25	50	0.001	—	—	3.0	—
	BC211	AMP	si	35	250	150	2	*25	50	0.001	6	—	50	—
A 19	OC57	AMP	npn, PADT, ge	35	10	55	—	*7	10	1.5	—	—	1.4	TS, KF, TI
	2N383	SY	npn, AJ, ge	35-110	200	85	85	*30	200	20	15	40	1	—
	2N190	GE	npn, AJ, ge	36	75	85	2	25	50	16	20	40	1	—
	2N187A	GE	npn, AJ, ge	36	200	85	4	25	200	16	20	40	1	TR, USN
	2N119	TI	npn, GR, si	36-90	150	175	1	*30	25	2	20	—	6	—
A 20	2N335	TI	npn, GR, si	36-90	150	175	1	45	25	2	20	—	11	TR, GE, NA, RA, AMP
	2N335A	NA	npn, MS, si	36-90	500	175	2.8	45	—	0.5	—	—	—	GE, TI
	2N759	NA	npn, DM, si	36-90	500	200	2.5	45	—	0.2	—	—	—	—
	2N759A	NA	npn, DM, si	36-90	500	200	2.5	60	—	0.1	—	—	—	—
	2N1152	NA	npn, DM, si	36-90	150	175	0.86	45	25	2	—	7	1	TR, TI
A 21	2N533	GI	*	37	100	85	2	*15	—	3	14	14	15	* matched npn, npn, TI
	2N1278	TR	N-GJ	*37	150	—	—	*40	25	—	—	5	200	Switch
	2N742	NA	npn, MS, si	40	—	200	1.71	60	100	0.1	—	—	—	—
	2N1069	SY	npn, AJ, ge	40	150	85	85	*25	20	1	—	—	—	—
	2N1176	BE	npn, AJ, ge	40	300	85	6.6	15	300	10	—	—	—	—
A 22	2N1176A	BE	npn, AJ, ge	40	300	85	6.6	40	300	10	—	—	—	—
	2N1176B	BE	npn, AJ, ge	40	300	85	6.6	60	300	15	—	—	—	—
	2N1191	MO	npn, AJ, ge	40	200	100	2.7	*40	200	2	10	—	1.5	TI
	2N1565	TI	npn, DM, si	40	1200	175	8.0	60	50	1μa	5	*5	150	—
	2N1678	GI	npn, DR, ge	40	120	85	2	*60	—	3	—	3	—	Trixie Driver
A 23	BCY11	AMP	si	40	312	150	2.5	*60	500	0.02	7	90	1.5	micromin RF switch
	BCY12	AMP	si	40	312	150	2.5	*32	500	0.02	7	90	2	2N650
	4K4A	RA	npn, AJ, ge	40	80	85	85	24	100	2	10	14	6	—
	TR-650	IND	npn, AJ, ge	40	150	85	2.5	45	400	1.0	10	20	2	—
	TR-653	IND	npn, AJ, ge	40	150	85	2.5	30	400	1.0	10	20	2	—
A 24	2N382	SY	npn, AJ, ge	40-76	200	85	3.3	*25	200	20	—	—	10	KF, TI
	2N1840	TR	npn, MESA, si	40-90	100amb	175	0.66	45	25	0.1μa	—	*8	50	TI
	2N480A	TR	npn, DG, si	40-100	200	200	—	45	25	0.02	20	7	11	—
	2N929	TI	npn, PL, si	*40-120	600	175	4.0	45	30	0.01μa	2	*6	60	—
	2N2387	TI	npn, PL, si	*40-120	1200	175	8.0	45	30	0.01μa	2	6	60	—
A 25	ST1244	TR	npn, GJ, si	*40-125	200	150	1.33	20	50	0.8	20	*2	20	TI
	2N43	GE	npn, AJ, ge	42	240	100	4	45	300	16	6	40	1.3	—
	OC79	AMP	npn, PADT, ge	42	550	75	—	*26	300	10	—	*7	1.2	—
	2N104	RCA	npn, AJ, ge	44	150	—	—	30	*10	—	12	12	50	—
	2N215	RCA	npn, AJ, ge	44	150	—	—	30	*10	10	—	*7	*7	—
A 26	2N525	GE	npn, AJ, ge	44	225	100	4	*45	500	10	6	25	2.5	MO, SY, TI
	2N1924	GE	npn, AJ, ge	44	225	85	—	4	500	4	—	—	—	MO, TI
	2N322	GE	npn, AJ, ge	45	140	85	4	18	100	16	—	25	2.0	Driver, MO, TI
	2N465	IND	npn, AJ, ge	45	150	85	2.5	*45	200	6	15	20	0.8	MO, RA, US, GI, SY, TI
	2N595	GI	npn, AJ, ge	45	150	85	1.67	*20	—	2	16	15	4	Bilateral, TI
A 27	2N924	NA	npn, AJ, si	45	150	200	2.5	40	—	.005	—	12	0.8	Driver, TI
	2N1098	GE	npn, AJ, ge	45	140	85	4	16	100	16	—	25	—	Driver
	2N1145	GE	npn, AJ, ge	45	140	85	4	25	100	16	—	40	—	—
	2N1372	TI	npn, AJ, ge	45	250	100	3.3	45	200	3	7	—	1.5	KF
	2N1373	TI	npn, AJ, ge	45	250	100	3.3	45	200	3	7	—	1.5	audio/med. power
A 28	2N1442	NA	npn, AJ, si	45	400	200	2.28	50	100	0.01	12	25	1	—
	2N1447	IND	npn, AJ, ge	45	200	85	3.3	45	400	5	6	20	3	—
	2N1451	IND	npn, AJ, ge	45	200	85	3.3	45	400	7.5	9	20	1.5	—
	2N1477	SSD	npn, AJ, si	45	250	175	1.7	100	100	2	—	7	1	—
	CK55A	RA	npn, AJ, ge	45	80	85	—	24	100	2	22	—	1.0	micromin

A continued

Cross Index Key	Type No.	Mfr.	Type	h _{FE} *h _{FE} **G _m	MAX. RATINGS				CHARACTERISTICS					Remarks
					P _c (mW)	T _j (°C)	mW/°C	V _{CEO} *V _{CBO} (V)	I _C (mA)	I _{CO} (μA)	NF (dB)	C _{oe} *C _{ob} (pF)	f _{ae} *f _T *f _{αb} (Mc)	
A 22	IR721	IND	ppp,AJ,ge	45	150	2.5	3	30	200	10	15	20	3	2N320 US, TI Mega life, TI SY, US
	2N752	NA	ppp,AJ,ge	45-150	500	200	2.5	45	—	0.2	—	—	—	
	2N2876	GE	ppp,AJ,ge	*45-290	250	185	1.66	*60	25	0.004	—	*4	15	
	2N280	AMP	ppp,AJ,ge	47	125	75	0.45	*20	10	150	10	—	0.1	
	OC71N	AMP	ppp,ge	47	110	75	0.45	*30	10	—	10	—	—	
A 23	TR320	IND	ppp,AJ,ge	48	150	85	3	25	100	10	—	25	2.5	*MIL, GE, TI MO, TI IND, MO, GI RA, US
	2N650	MO	ppp,AJ,ge	49	200	100	2.7	*45	500	3	5	—	1.5	
	2N650A	MO	ppp,AJ,ge	49	200	100	2.8	*45	500	5	15	25	1.5	
	2N653	MO	ppp,AJ,ge	49	200	100	2.8	*30	250	10	10	20	1.5	
	2N1186	MO	ppp,AJ,ge	49	200	100	2.7	*60	500	5	5	—	1.5	
A 24	2N434*	GI	ppp,AJ,ge	50	150	100	2	*45	—	10	18	40	3.5	MO
	2N320	GE	ppp,AJ,ge	50	225	85	4	20	200	16	9	—	2.5	
	2N331	BE	ppp,AJ,ge	50	200	85	—	*30	200	16	—	—	1.16	
	2N363	IND	ppp,AJ,ge	50	150	85	2.5	30	200	10	6.5	—	0.8	
	2N422	RA	ppp,FA,ge	50	150	85	—	10	100	6	—	—	—	
A 25	2N917	FA	ppp,DP,si	*50	300	200	1.71	15	—	0.0004	—	*1.0	*800	TO-18
	2N918	FA	ppp,DP,si	*30	300	200	1.71	15	—	0.0004	—	*1.0	*900	
	2N941	SSD	ppp,AJ,si	50	250	175	1.7	8	50	.001	—	7	16	
	2N942	SSD	ppp,AJ,si	50	250	175	1.7	8	50	.001	—	7	10	
	2N1173	WE	ppp,AJ,ge	50	—	100	3.3	*20	200	150	3.0	25	—	
A 26	2N1174	WE	ppp,AJ,ge	50	—	100	3.3	*20	200	100	3.0	25	—	2N320 Matched
	2N1273	TI	ppp,AJ,ge	50	150	85	2.5	*15	150	3	6.5	—	—	
	2N1274	TI	ppp,AJ,ge	50	150	85	2.5	*25	150	3	6.5	—	—	
	2N1383	TI	ppp,AJ,ge	50	200	85	3.3	*25	200	14	7.0	—	1.5	
	2N1589	TR	N-G-5	50	150	—	1.00	*15	25	—	—	5	5	
A 27	2N1590	TR	N-G-5	50	150	—	1.00	*30	25	—	—	5	5	TI
	2N1591	TR	N-G-5	50	150	—	1.00	*60	25	—	—	5	5	
	2N1917	SSD	ppp,AJ,si	50	250	175	1.7	8	50	.001	—	7	16	
	2N1918	SSD	ppp,AJ,si	50	250	175	1.7	8	50	.001	—	7	10	
	2N2271	SY	ppp,AJ,ge	50	250	100°C	3.3	*20	500	10	—	—	0.01	
A 28	2N2354	SY	ppp,AJ,ge	50	180	85	3.0	*20	150	10	—	—	—	TI, KF TI, KF "Meg-A-Life" Driver Submin.
	BCY10	AMP	si	50	312	150	2.5	*32	500	0.02	7	100	—	
	TR-370	IND	ppp,AJ,ge	50	150	85	2.5	30	200	7.5	—	20	2.5	
	2N214	SY	ppp,AJ,ge	50-100	180	85	3	*40	100	50	—	—	0.01	
	2N228	SY	ppp,AJ,ge	50-100	180	85	3	*40	100	100	—	—	0.01	
A 29	2N241A	SY	ppp,AJ,ge	50-100	200	85	3.3	*30	200	16	—	—	10	Submin. Submin. Submin. US, GI Driver micromin RF switch Bilateral, TI
	2N270	SY	ppp,AJ,ge	50-100	150	85	2.5	*25	75	12	—	—	0.01	
	2N321	SY	ppp,AJ,ge	50-100	180	85	3.3	*25	200	16	—	—	10	
	2N1059	SY	ppp,AJ,ge	50-100	180	75	3.5	*20	100	50	—	—	0.01	
	2N108	SY	ppp,AJ,ge	50-135	150	85	2.5	*20	70	14	—	—	—	
A 30	2N109	SY	ppp,AJ,ge	50-150	50	85	0.9	*25	75	12	—	—	—	Submin. Submin. Submin. US, GI Driver micromin RF switch Bilateral, TI
	2N217	SY	ppp,AJ,ge	50-150	—	85	—	*25	75	12	—	—	—	
	2N323	SY	ppp,AJ,ge	50-150	140	85	2.3	*16	100	16	—	—	800	
	2N1374	SY	ppp,AJ,ge	50-150	150	100	2	*25	200	100	—	—	—	
	2N1375	SY	ppp,AJ,ge	50-150	150	100	2	*45	200	100	—	—	—	
A 31	2N526A	MO	ppp,AJ,ge	53-90	225	100	3	*45	500	10	15	40	6.5	Submin. Submin. Submin. US, GI Driver micromin RF switch Bilateral, TI
	2N188A	GE	ppp,AJ,ge	54	200	85	4	25	200	16	—	—	40	
	2N191	GE	ppp,AJ,ge	54	75	85	2	25	50	16	15	40	1.2	
	2N158A	TR	N-H	54	500	—	0.30	60	100	0.1	—	—	1.2	
	CRK2B	RA	ppp,AJ,ge	54	75	65	1.25	35	100	10	6.5	—	1.6	
A 32	CK66B	RA	ppp,AJ,ge	54	75	85	1.25	35	100	10	—	—	—	Submin. Submin. Submin. US, GI Driver micromin RF switch Bilateral, TI
	CK66C	RA	ppp,AJ,ge	54	75	85	1.25	35	100	10	—	—	—	
	CK261	RA	ppp,AJ,ge	54	75	85	1.25	35	100	10	—	—	—	
	CK262	RA	ppp,AJ,ge	54	75	85	1.25	35	100	10	—	—	—	
	2N566	IND	ppp,AJ,ge	55	150	85	2.5	30	300	3	12	20	1	
A 33	2N1097	GE	ppp,AJ,ge	55	140	85	4	16	100	16	—	25	—	Submin. Submin. Submin. US, GI Driver micromin RF switch Bilateral, TI
	2N1144	GE	ppp,AJ,ge	55	140	85	4	16	100	16	—	25	—	
	CK27A	RA	ppp,AJ,ge	55	80	85	—	15	400	2	—	14	—	
	OC58	AMP	ppp,PAOT,ge	55	10	55	—	*7	10	1.5	—	—	—	
	2N596	GI	ppp,AJ,ge	60	150	85	1.67	20	—	2	16	15	6	
A 34	2N633	IND	ppp,AJ,ge	60	150	85	—	35	200	10	—	—	—	RA, US NA
	2N937	SSD	ppp,AJ,si	60	385	160	2.5	35	300	.005	18	70	0.8	
	2N940	SSD	ppp,AJ,si	60	250	175	2.85	35	100	.001	—	—	0.5	
	2N957	FA	ppp,DP,si	*60	800	150	1.7	20	—	1.0	—	*4.0	2	
	2N1175	SSD	ppp,AJ,si	60	250	175	1.7	60	100	.005	—	7	*400	
A 35	OC60	AMP	ppp,PAOT,ge	60	10	55	—	*7	10	1.5	—	—	—	RA, US NA
	TS602	TS	ppp,AJ,ge	*60	200	100	—	*12	400	20	—	—	1.6	
	TS604	TS	ppp,AJ,ge	*60	200	100	—	*20	400	20	—	—	1.6	
	AC107	AMP	ppp,ge	60	80	75	0.6	*15	5	2.0	3	—	2	
	2N220	RCA	ppp,AJ,ge	65	20	—	—	*10	2	12	6	—	*0.85	

A continued

Cross Index Key	Type No.	Mfr.	Type	h_{fe} $^{*}h_{FE}$ $^{**}G_m$	MAX. RATINGS				CHARACTERISTICS						Remarks
					P_c (mw)	T_i ($^{\circ}C$)	$m_w/^{\circ}C$	V_{CEO} $^{*}V_{CBO}$ (v)	I_C (ma)	I_{CO} (μa)	NF (db)	C_{oe} $^{*}C_{ob}$ (pf)	f_{ae} $^{*}f_T$ $^{**}f_{ab}$ (mc)		
A 29	2N175	RCA	pnnp,AJ,ge	65	20	—	—	*10	2	12	6	—	*0.85	GI, TI SY	
	2N398A	MO	pnnp,AJ,ge	65	150	100	2	105	200	12	—	—	1		
	2N407	RCA	pnnp,AJ,ge	65	150	71	—	*20	70	14	—	—	—		
	2N408	RCA	pnnp,AJ,ge	65	150	71	—	*20	70	14	—	—	—		
	2N649	RCA	pnnp,AJ,ge	65	100	—	—	*20	50	14	—	—	—		
	2N759A	TR	N-M	65	500	—	0.30	60	100	0.1	—	5	100	TI	
	2N1448	IND	pnnp,AJ,ge	65	200	85	3.33	45	400	5	6	20	4		
	2N1452	IND	pnnp,AJ,ge	65	200	85	3.33	45	400	7.5	9	20	2.2		
OC74	AMP	pnnp,PADT,ge	65	550	75	—	20	300	10	—	—	1.5			
2N2043	MO	pnnp,AJ,ge	65-100	200	100	2.67	105	200	25	—	25	0.75			
A 30	2N2043A	MO	pnnp,AJ,ge	65-100	200	100	2.67	105	200	25	—	25	0.75	"Meg-A-Life", TI Driver, MO	
	2N323	GE	pnnp,AJ,ge	68	140	85	4	18	100	16	—	25	2.5		
	2N281	AMP	pnnp,PADT,ge	70	165	75	—	*32	250	4.5	—	—	0.9		
	2N282	AMP	pnnp,ge	70	167	75	—	*32	250	4.5	—	—	0.9	RA, US	
	2N361	IND	pnnp,AJ,ge	70	150	85	2.5	45	200	10	—	—	—		
	2N591	RCA	pnnp,AJ,ge	70	100	—	—	*32	40	7	—	—	0.7	SY	
	2N647	RCA	npn,AJ,ge	70	100	—	—	*25	50	14	—	—	—		
	2N735	TI	npn,MS,si	70	1.0	175	—	80	50	1	20	5	50	TO-18, TR, NA NA KF	
	2N739	TI	npn,DM,si	70	1w	175	—	*125	70	1	—	—	—		
	2N1352	IND	pnnp,AJ,ge	70	150	85	2.5	30	200	2.5	—	18	2.5		
A 31	2N1565	TI	npn,MS,si	70	1.2	175	—	*80	50	1	20	5	50	NA	
	2N1573	TI	npn,DM,si	70	1.2w	175	—	*125	50	1	—	—	—		
	2N213	SY	pnnp,AJ,ge	70-250	150	85	2.3	*40	100	50	—	—	0.01		
	2N1251	SY	pnnp,AJ,ge	70-250	150	85	2.5	*20	100	50	—	—	7.5		
	TR-383	IND	pnnp,AJ,ge	72	200	85	3.33	25	200	7.5	—	20	1.8		
	2N527A	MO	pnnp,AJ,ge	72-121	225	100	3	*45	500	10	15	40	7.0	"Meg-A-Life" SO	
	2N241	GE	pnnp,AJ,ge	73	100	85	3	25	200	16	—	40	1.3		
	2N109	RCA	pnnp,AJ,ge	75	150	—	—	25	70	14	—	—	—		
	2N192	GE	pnnp,AJ,ge	75	75	85	2	25	50	16	15	40	1.5		
	2N217	RCA	pnnp,AJ,ge	75	150	—	—	25	70	14	—	—	—		
A 32	2N361	US	pnnp,AJ,ge	*75	150	85	—	30	200	10	13	—	1.5	TI	
	2N192	MO	pnnp,AJ,ge	75	200	100	2.7	*40	200	2	10	—	2		
	2N1443	NA	pnnp,AJ,si	75	400	200	2.28	50	100	0.01	12	25	1		
	2N1672	GI	npn,AJ,ge	75	120	85	0.5	*40	—	5	—	—	—		
	C620	CT	pnnp,AJ,si	**75	250	160	2	10	50	—	3.5	15	—		
	C622	CT	pnnp,AJ,si	**75	250	160	2	10	50	—	1.5	15	—	tg FE tg FE	
	C624	CT	pnnp,AJ,si	**75	250	160	2	10	50	—	0.4	15	—		
	GT-74	GI	pnnp,AJ,ge	75	150	100	2	25	—	5	6	35	—		
	GT-81	GI	pnnp,AJ,ge	75	150	100	2	25	—	5	16	35	—		
	TR-323	IND	pnnp,AJ,ge	75	150	85	2.5	16	200	7.5	—	20	2.5		
A 33	2N1376	SY	pnnp,AJ,ge	75-150	150	100	2	*25	200	100	—	—	—	TI	
	2N1431	SY	npn,AJ,ge	75-150	180	75	3.6	*25	100	50	—	—	10		
	2N2712	GE	npn,P,si	*75-225	200	100	2.67	*18	100	0.05 μa	2.8	*9	—		
	2N2716	GE	npn,P,si	75-225	200	100	2.67	*18	25	0.05 μa	2.8	5	—		
	2N1950	IND	npn,DM,si	75-250	600	175	4	20	—	0.01	—	—	—		
	2N1951	IND	npn,DM,si	75-250	600	175	4	30	—	0.01	—	—	—	TR	
	2N1952	IND	npn,DM,si	75-250	600	175	4	40	—	0.01	—	—	—		
	2N1279	TR	N-GJ	*76	150	—	1.00	*40	25	—	—	5	15		
	2N120	TI	npn,GR,si	76-333	150	175	1	*30	25	2	20	—	7		
	2N336	TI	npn,GR,si	76-333	150	175	1	45	25	2	20	—	13		
A 34	2N336A	NA	npn,MS,si	76-333	500	175	2.8	45	—	0.5	—	—	—	TI TI TI, TR TR, TI MO	
	2N760	NA	npn,DM,si	76-333	500	200	2.5	45	—	0.2	—	—	—		
	2N760A	NA	npn,DM,si	76-333	500	200	2.5	60	—	0.1	—	—	—		
	2N1153	NA	npn,DM,si	76-333	150	175	0.86	45	25	2	—	7	1		
	2N321	GE	pnnp,AJ,ge	80	225	85	4	20	200	16	—	25	3		
	2N527	SY	pnnp,AJ,ge	80	225	85	3.7	*45	500	10	—	—	3.3	TS, TI US, SY, TI TI US, TI /	
	2N651	MO	pnnp,AJ,ge	80	200	100	2.8	*45	500	3	5	—	2		
	2N651A	MO	pnnp,AJ,ge	80	200	100	2.8	*45	500	10	15	—	2.0		
	2N654	MO	pnnp,AJ,ge	80	200	100	2.8	*30	250	5	10	—	2.0		
	2N780	TI	npn,DM,si	80	1w	175	—	45	50	.0005	—	—	—		
A 35	2N1187	MO	pnnp,AJ,ge	80	200	100	2.7	*60	500	5	5	—	2	GI, KF KF KF KF	
	2N1370	TI	pnnp,AJ,ge	80	150	85	2.5	25	150	3	6.5	—	2.0		
	2N1371	TI	pnnp,AJ,ge	80	150	85	2.5	25	150	3	6.5	—	2.0		
	2N1374	TI	pnnp,AJ,ge	80	250	100	3.3	25	200	3	6.5	—	2		
	2N1375	TI	pnnp,AJ,ge	80	250	100	3.3	45	200	3	6.5	—	2		
	2N1382	TI	pnnp,AJ,ge	80	200	85	—	25	200	14	6.5	—	2	MO micromin RF switch	
	2N1449	IND	pnnp,AJ,ge	80	200	85	3.33	45	400	5	6	20	5		
	2N1926	GE	pnnp,AJ,ge	80	225	85	—	40	500	4	—	—	—		
	CK28A	RA	pnnp,AJ,ge	80	80	85	—	12	400	80	—	14	17		
	OC59	AMP	pnnp,PADT,ge	80	10	55	—	*7	10	1.5	—	—	2.2		

SHOCKLEY SEMICONDUCTOR DEVICES

TYPE E 4-LAYER DIODES

1-N SERIES

Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes		Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes	
	25°C	-40° to 85°C	25°C	-40°C		25°C	-40° to 85°C	25°C	85°C
1N3831	20 ± 4	14-25	0.5-15	40 max	1N3839	20 ± 4	14-25	14-50	5 min
1N3832	25 ± 4	19-30	0.5-15	40 max	1N3840	25 ± 4	19-30	14-50	5 min
1N3833	30 ± 4	23-36	0.5-15	40 max	1N3841	30 ± 4	23-36	14-50	5 min
1N3834	35 ± 4	28-41	0.5-15	40 max	1N3842	35 ± 4	28-41	14-50	5 min
1N3835	40 ± 4	32-46	0.5-15	40 max	1N3843	40 ± 4	32-46	14-50	5 min
1N3836	45 ± 4	37-51	0.5-15	40 max	1N3844	45 ± 4	37-51	14-50	5 min
1N3837	50 ± 4	41-57	0.5-15	40 max	1N3845	50 ± 4	41-57	14-50	5 min
1N3838	100 ± 10	80-115	0.5-15	40 max	1N3846	100 ± 10	80-115	14-50	5 min

COMMERCIAL SERIES

MIL-LINE SERIES

SERIES A (BROAD SPEC)

Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes	Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes	Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes
	25°C	-60° to 125°C			25°C	-60° to 125°C			25°C	-60° to 125°C	
4E20-8	20 ± 4	1-15	14-45	4E20M-8	20 ± 4	14-25	1-15	4E20A	20 ± 6	0.5-60	0.5-60
4E20-28	20 ± 4	1-15	14-45	4E20M-28	20 ± 4	14-25	1-15	4E30A	30 ± 6	0.5-60	0.5-60
4E30-8	30 ± 4	1-15	14-45	4E30M-8	30 ± 4	23-36	1-15	4E40A	40 ± 6	0.5-60	0.5-60
4E30-28	30 ± 4	1-15	14-45	4E30M-28	30 ± 4	23-36	1-15	4E50A	50 ± 6	0.5-60	0.5-60
4E40-8	40 ± 4	1-15	14-45	4E40M-8	40 ± 4	32-46	1-15				
4E40-28	40 ± 4	1-15	14-45	4E40M-28	40 ± 4	32-46	1-15				
4E50-8	50 ± 4	1-15	14-45	4E50M-8	50 ± 4	41-57	1-15				
4E50-28	50 ± 4	1-15	14-45	4E50M-28	50 ± 4	41-57	1-15				
4E100-8	100 ± 10	1-15	14-45	4E100M-8	100 ± 10	80-115	1-15				
4E100-28	100 ± 10	1-15	14-45	4E100M-28	100 ± 10	80-115	1-15				
4E200-8	200 ± 20	1-15	14-45	4E200M-8	200 ± 20	160-230	1-15				
4E200-28	200 ± 20	1-15	14-45	4E200M-28	200 ± 20	160-230	1-15				

TYPE J 4-LAYER DIODES

COMMERCIAL SERIES

MIL-LINE SERIES for extended temperature ranges

Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes	Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes
	25°C	-60° to 105°C			25°C	-60° to 105°C	
4J50-5	50 ± 5	1-10	9-45	4J50M-5	50 ± 5	41-57	1-10
4J50-25	50 ± 5	1-10	9-45	4J50M-25	50 ± 5	41-57	9-45
4J100-5	100 ± 10	1-10	9-45	4J100M-5	100 ± 10	80-115	1-10
4J100-25	100 ± 10	1-10	9-45	4J100M-25	100 ± 10	80-115	9-45
4J200-5	200 ± 20	1-10	9-45	4J200M-5	200 ± 20	160-230	1-10
4J200-25	200 ± 20	1-10	9-45	4J200M-25	200 ± 20	160-230	9-45

TYPE G 4-LAYER DIODES

COMMERCIAL SERIES

MIL-LINE SERIES for extended temperature ranges

Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes	Type	Switching Voltage (V_s) in volts		Holding Current (I_h) in milliamperes
	25°C	-60° to 105°C			25°C	-60° to 105°C	
4G50	50 ± 5	1-50	1-50	4G50M	50 ± 5	41-57	1-50
4G100	100 ± 10	1-50	1-50	4G100M	100 ± 10	80-115	1-50
4G200	200 ± 20	1-50	1-50	4G200M	200 ± 20	160-230	1-50



New! NPN HIGH FREQUENCY SILICON POWER TRANSISTOR

MAXIMUM RATINGS at 25°C base temperature unless otherwise stated

CHARACTERISTICS at 25°C unless otherwise stated

	3TX002	3TX003	3TX004	Condition	3TX002	3TX003	3TX004
BVCBO	100 V	100 V	60 V	F_T min	10 V, 2.5 A	150 MC	150 MC
I_C	5 A	5 A	5 A	Beta min	5 V, 5 A	30	10
PAVERAGE	60 W	45 W	45 W	VCE max	5 A, 0.5 A	1V	2V
R_T	2.5°C/W	3.3°C/W	3.3°C/W	ICBO max	150°C 3TX002 - 80 V	10 MA	10 MA
Temperature-Storage	-65 to 200°C	-65 to 200°C	-65 to 200°C		3TX003 - 80 V	10 MA	10 MA
Temperature-Operating	-65 to 175°C	-65 to 175°C	-65 to 175°C		3TX004 - 50 V	10 MA	10 MA

A MAJOR SOURCE FOR 4-LAYER DIODES AND HIGH FREQUENCY SILICON POWER TRANSISTORS.
For further information on these and other Shockley solid-state devices, call or write your nearest Clevite distributor or contact:

CLEVITE TRANSISTOR, Palo Alto Plant, 1801 Page Mill Road, Palo Alto, California

CLEVITE

TRANSISTOR

A Division of Clevite Corporation

ON READER-SERVICE CARD CIRCLE 441

A continued

Cross Index Key	Type No.	Mfr.	Type	h _{FE} , *h _{FE} **G _n	MAX. RATINGS			CHARACTERISTICS					Remarks
					P _c (mw)	T _j (°C)	V _{CEO} *V _{CBO} (v)	I _C (ma)	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} (pf)	f _{ae} *f _T **f _{db} (mc)	
A 36	TR-321	IND	pnp,AJ,ge	80	150	85	30	200	7.5	—	20	3.1	2N321
	2N543A	TR	npn,DG,si	80-200	200	200	45	25	0.02	—	7	15	
	2N736A	TI	M,si	80-200	1000	—	80	100	—	—	—	—	
	2N1566A	TI	M,si	80-200	1200	—	80	100	—	—	—	—	
	TN1841	TR	npn,MESA,si	80-331	100damb	175	45	50	0.1μa	—	*8	50	
	2N2648	GI	pnp,AJ,ge	80-500	250	100	*35	1	3μa	—	*18	*10	MO
A 37	2N527	GE	pnp,AJ,ge	81	225	100	*45	50	10	6	25	3.3	Driver, MO, TI
	2N324	GE	pnp,AJ,ge	85	140	85	18	100	16	—	25	3	US, GI, RA, SY, TI
	2N466	MO	pnp,AJ,ge	90	200	100	*35	100	15	—	—	1	
	2N1247	TI	npn,PL,si	*90	600	175	6	30	0.005μa	4	7	60	
	2N1706	TS	—	90	200	100	*25	400	10	—	—	3	TI
	2N1707	TS	pnp,AJ,ge	90	200	100	*30	400	15	—	—	3	micromin
A 38	CK56A	RA	pnp,AJ,ge	90	80	85	20	100	2	22	—	1.2	
	OC75	AMP	pnp,AJ,ge	90	125	75	*30	50	5	—	—	0.75	
	OC75N	AMP	pnp,ge	90	110	75	*30	10	4.5	15	—	—	
	2N2171	TS	pnp,AJ,ge	*90-250	500	100	*50	400	10	3.5	*20	**7.5	KF
	2N1376	TI	pnp,AJ,ge	95	250	100	45	200	7	3.5	40	2	KF
	2N1377	PH	pnp,AJ,ge	95	250	100	45	200	3	3.5	*14	*15	Output
A 39	2N2375	PH	pnp,AJ,ge	95	250	100	*35	500	2	—	—	—	
	2N207	PH	pnp,AJ,ge	100	50	65	*12	20	4	5	—	*2	
	2N207A	PH	pnp,AJ,ge	100	50	65	*12	20	4	2	—	*2	
	2N207B	RA	pnp,AJ,ge	100	50	85	12	20	4	2	—	*2	IND, US
	2N360	IND	pnp,AJ,ge	100	150	85	25	400	10	—	—	1.2	RA, US
	2N362	IND	pnp,AJ,ge	100	150	85	25	100	200	—	—	—	
A 40	2N534	PH	pnp,AJ,ge	100	25	65	*50	25	8	—	—	—	
	2N535	PH	pnp,AJ,ge	100	50	85	*20	20	6	10	—	*2	
	2N535A	PH	pnp,AJ,ge	100	50	85	*20	20	6	5	—	*2	
	2N535B	PH	pnp,AJ,ge	100	50	85	*20	20	6	0	—	*2	US, GI
	2N568	IND	pnp,AJ,ge	100	150	85	30	300	3	12	20	1.5	RA, US, GI
	2N632	IND	pnp,AJ,ge	100	150	85	30	200	10	—	—	1	
A 41	2N736	TI	npn,MS,si	100	1.0	175	*80	50	1	20	5	50	TO-18, TR, FA, NA
	2N740	TI	npn,DM,si	100	1w	175	*125	100	1	—	—	—	TR, NA
	2N1380	TI	pnp,AJ,ge	100	250	100	12	200	3	5.5	40	2	
	2N1381	TI	pnp,AJ,ge	100	250	100	25	200	3	5.5	40	2	lg FE
	2N1381	CT	pnp,AJ,si	*100	250	160	10	50	—	3.5	15	—	
	CK21	CT	pnp,AJ,si	*100	250	160	10	50	—	1.5	15	—	lg FE
A 42	CK23	CT	pnp,AJ,si	*100	250	160	10	50	—	0.4	15	—	lg FE
	CK25	CT	pnp,AJ,si	*100	250	160	10	50	—	0.4	15	—	lg FE
	2N1574	TI	npn,DM,si	100	1.2w	175	*125	50	1	—	—	—	TR
	2N383	IND	pnp,AJ,ge	100	150	85	25	200	10	—	—	1.8	2N383
	4JX1A547	GE	pnp,AJ,ge	*10-200	150	75	*20	100	6μa	6	*50	*10	
	2N213A	SY	npn,AJ,ge	10-250	180	85	*40	100	50	—	—	10	
A 43	2N930	TI	npn,PL,si	*10-300	600	175	45	30	0.01μa	2	*6	60	
	2N1944	IND	npn,DM,si	10-300	600	175	20	—	0.01	—	—	—	
	2N1945	IND	npn,DM,si	10-300	600	175	4	30	0.01	—	—	—	
	2N1946	IND	npn,DM,si	10-300	600	175	4	40	0.01	—	—	—	
	2N1947	IND	npn,DM,si	10-300	600	175	4	20	—	—	—	—	
	2N1948	IND	npn,DM,si	10-300	600	175	4	30	0.01	—	—	—	
A 44	2N1949	IND	npn,DM,si	100-300	600	175	4	40	0.01	—	—	—	
	2N2388	TI	npn,PL,si	*100-300	600	175	45	30	0.01μa	2	*6	60	
	CK67B	RA	pnp,AJ,ge	100-300	75	85	35	100	10	—	—	—	Submin.
	CK67C	RA	pnp,AJ,ge	100-300	75	85	35	100	10	—	—	—	Submin.
	2N265	GE	pnp,AJ,ge	100	200	100	25	400	10	15	40	1.5	Driver
	2N1705	TS	—	100	150	100	*25	400	10	16	35	4	TI
A 45	GT-109	GI	pnp,AJ,ge	10	140	85	18	100	16	—	—	—	Driver, MO, TI
	2N508	GE	pnp,AJ,ge	12	140	85	8	100	16	—	—	—	micromin RF switch
	2N1018	KF	pnp,AJ,ge	120	80	85	8	400	2	—	14	25	
	2N2431	AMP	pnp,ge	120	165	75	*32	150	10	—	—	1.7	
	ST1290	TR	N-GJ	120	200	—	20	50	75	—	4	10	
	2N2586	TI	npn,PL,si	*120-360	600	175	45	30	0.002μa	1.5	*6	60	
A 46	2N2430	AMP	npn,ge	25	280	90	3.3	30	—	—	—	25	
	2N2614	RCA	pnp,AJ,ge	25	100	100	*20	50	6.5	—	—	10	
	2N2705	AMP	pnp,ge	25	280	90	0.37	200	—	4	—	2.5	
	2N2707	AMP	pnp,ge	25	280	90	0.37	200	—	4	—	2.5	
	AC127	AMP	npn,ge	25	280	90	3.3	30	—	—	—	2.5	
	TR-508	IND	pnp,AJ,ge	25	150	85	2.5	200	8	—	20	3.5	2N508
A 47	2N652	MO	pnp,AJ,ge	30	200	100	*45	500	3	5	—	2.5	SY, US, TI
	2N652A	MO	pnp,AJ,ge	30	200	100	*45	500	10	15	—	2.5	TI, US, TI
	2N655	MO	pnp,AJ,ge	30	200	100	*30	250	5	10	—	2.5	
	2N1188	MO	pnp,AJ,ge	130	200	100	*60	500	5	5	—	2.5	
	2N1248	TI	npn,PL,si	*130	600	175	4.0	30	0.010μa	4	7	60	

FACTS, CIRCUIT APPLICATIONS, TEST DATA, AS PRESENTED
IN SEMINARS CONDUCTED AROUND THE COUNTRY

Now Available in Print



The First Complementary Silicon Planar Transistors for a broad range of applications are discussed in a new 32-page brochure. ☐ The aim of this "printed seminar" is to familiarize potential users of advanced silicon planar transistors with the advantages and applications of Sperry's new low-level, low-noise, high beta complementary NPN and PNP transistors. The brochure comprehensively reviews the advantages in reducing weight, volume and cost of equipment in circuit applications in addition to detailed parameter distribution and variation curves. ☐ Requests for the Sperry Silicon Planar Transistor Brochure are to be made on company letterhead. ☐ Sales Offices: Chicago, Illinois; Los Angeles, California; Oakland, New Jersey; Medford, Massachusetts; Sykesville, Maryland; Bethpage, Long Island, New York. ☐ SPERRY SEMICONDUCTOR, Norwalk, Connecticut.

ON READER-SERVICE CARD CIRCLE 442


SPERRY
DIVISIONS OF
SPERRY RAND
CORPORATION

A continued

Cross Index Key	Type No.	Mfr.	Type	h_{fe} $^{*}h_{FE}$ $^{**}G_m$	MAX. RATINGS				CHARACTERISTICS						Remarks
					P_c (mw)	T_i ($^{\circ}C$)	$m_w/^{\circ}C$	V_{CEO} $^{*}V_{CBO}$ (v)	I_C (ma)	I_{CO} (μa)	NF (db)	C_{oe} $^{*}C_{ob}$ (pf)	f_{ae} $^{*}f_T$ $^{**}f_{ab}$ (mc)		
A 43	2N78	GE	npn, RG, ge	*135	65	85	1.1	15v	20	0.7	12	*3	*9	IND, US GI RA BE	
	2N78A	GE	npn, RG, ge	*135	65	85	1.1	20	20	0.7	12	3	9		
	2N1592	TR	N-G5	140	150	—	1.00	*15	25	—	—	5	5		
	2N1593	TR	N-GJ	140	150	—	1.00	30	25	—	—	5	5		
	2N1594	TR	N-GJ	140	150	—	1.00	*60	25	—	—	5	5		
	2N359	RA	pnnp, AJ, ge	150	150	85	2.5	45	200	10	—	—	1		
	2N570	IND	pnnp, AJ, ge	150	150	IT	2.5	30	300	3	12	20	2		
	2N631	IND	pnnp, AJ, ge	150	150	85	2.5	25	200	10	—	—	1.2		
	2N1008A	SY	pnnp, AJ, ge	150	400	85	6.6	*40	300	500	—	—	25		
	2N1471	IND	pnnp, AJ, ge	150	200	85	3.33	12	200	2.5	—	18	5		
A 44	2N1193	MO	pnnp, AJ, ge	160	200	100	2.7	*40	200	2	10	—	2.5	TI tg FE IND, SY, US, TI micromin MO, RA, US GI	
	2N2613	RCA	pnnp, AJ, ge	160	100	100	2.2	*13	10	4	5	—	*10		
	C632	CT	pnnp, AJ, si	**175	250	160	2	250	50	—	—	2	—		
	C633	CT	pnnp, AJ, si	**175	250	160	2	350	50	—	—	2	—		
	2N467	MO	pnnp, AJ, ge	180	200	100	2.5	*35	100	6	—	—	1.2		
	CK67A	RA	pnnp, AJ, ge	180	80	85	—	15	100	2	22	—	—		
	2N467	GI	pnnp, AJ, ge	200	120	85	2	*35	—	10	16	40	0.5		
	2N169A	GE	npn, RG, ge	*200	75	85	1.25	*25	25	0.9	6	*2.4	*9		
	2N572	IND	pnnp, AJ, ge	200	150	85	2.5	30	300	3	12	20	3		
	2N1378	TI	pnnp, AJ, ge	200	250	100	3.3	12	200	3	4	40	3		
A 45	2N1379	TI	pnnp, AJ, ge	200	250	100	3.3	25	200	3	4	40	3	tg FE Output, TI TI tg FE tg FE tg FE tg FE	
	C631	CT	pnnp, AJ, si	**200	250	160	2	150	50	—	—	2	—		
	2N2374	PH	pnnp, AJ, ge	210	250	100	3.3	*35	500	2	—	*14	**15		
	2N2429	AMP	pnnp, AJ, ge	220	165	75	3.3	*32	30	—	4	—	2.3		
	2N1185	MO	pnnp, AJ, ge	260	200	100	2.7	*45	500	5	5	—	3		
	2N1194	MO	pnnp, AJ, ge	280	200	100	2.7	*40	200	2	10	—	3		
	C640	CT	pnnp, AJ, si	**200	675	160	5	35	50	—	—	8	20		
	C641	CT	pnnp, AJ, si	**40	675	160	5	35	50	—	—	8	30		
	C642	CT	pnnp, AJ, si	**60	675	160	5	35	50	—	—	8	40		
	C643	CT	pnnp, AJ, si	**90	675	160	5	35	50	—	—	8	50		
A 46	C644	CT	pnnp, AJ, si	12,000	675	160	5	35	50	—	—	8	60	tg FE USAF, TI m. pair 2N2375, TI	
	SST610	SSE	npn, DM, si	12,000	500	150	4	*60	500	0.3ma	8	20	*0.120		
	2N461	MO	pnnp, AJ, ge	—	200	100	2.8	*45	100	10	20	—	0.7		
	2N943	SSD	pnnp, AJ, si	—	250	175	1.7	18	50	—	—	7	1		
	2N944	SSD	pnnp, AJ, si	—	250	175	1.7	18	50	—	—	7	1		
	2N945	SSD	pnnp, AJ, si	—	250	175	1.7	50	50	—	—	7	1		
	2N946	SSD	pnnp, AJ, si	—	250	175	1.7	80	50	—	—	7	1		
	2N1919	SSD	pnnp, AJ, si	—	250	175	1.7	18	50	—	—	7	1		
	2N1920	SSD	pnnp, AJ, si	—	250	175	1.7	18	50	—	—	7	1		
	2N1921	SSD	pnnp, AJ, si	—	250	175	1.7	50	50	—	—	7	1		
	2N1922	SSD	pnnp, AJ, si	—	250	175	1.7	80	50	—	—	7	1		
	2N2376	PH	pnnp, AJ, ge	—	250	100	3.3	*35	500	2	—	*14	**15		



high gain



New Darlington Amplifier Transistor In 4 Lead TO-18 Package features very high beta — as high as 2,000 minimum at 100 μ A . . . very low leakage — as low as 1nA maximum at 30 volts . . . low noise, typically 2 db. □ These microelectronic devices contain two interconnected NPN silicon planar transistors which provide extremely high current gain in a single TO-18 package. □ The design economies and characteristics of these devices are particularly well-suited for high impedance amplifier inputs, low noise amplifiers and high gain stages. □ Production quantities are presently available for new Sperry types; 2N2723, 2N2724 and 2N2725. □ Sales Offices: Chicago, Illinois; Los Angeles, California; Oakland, New Jersey; Medford, Massachusetts; Sykesville, Maryland; Bethpage, L. I., New York. □ For complete details, write for technical bulletin. SPERRY SEMICONDUCTOR, Norwalk, Connecticut.

SPERRY
DIVISIONS OF
SPERRY RAND
CORPORATION

HIGH FREQUENCY

Includes types ranging up to and above the vhf range. In order of increasing f_{ae} , f_{ab} , or f_T .

Cross Index Key	Type No.	Mfr.	Type	f_{ae} * f_T ** f_{ab} (mc)	P_c (mw)	MAX. RATINGS			CHARACTERISTICS					Remarks
						T_i (°C)	$mW/°C$	V_{CEO} * V_{CBO} (v)	I_C (ma)	h_{fe} * h_{FE}	I_{CO} (μ a)	NF (db)	C_{oe} * C_{ob} (pf)	
HF 1	2N444A	GI	npn, AJ, ge	1	150	100	2	*40	—	25	2	12	14	TI
	2N707	PSI	npn, TDP, si	1	.006	175	56	—	12	.005	300	6	.2	NA, KF
	2N988	PSI	npn, TDP, si	1	.006	175	20	—	70	.05	250	8	.32	
	2N989	PSI	npn, TDP, si	1	.006	175	20	—	70	.05	250	11	.63	
	2N1024	SSD	pnp, AJ, si	**1	250	175	1.7	15	100	9	0.025	—	7	
HF 2	2N1025	SSD	pnp, AJ, si	**1	250	175	1.7	35	100	9-22	0.025	—	7	NA, KF
	2N916	PSI	npn, TDP, si	1.2	.006	200	45	—	120	.001	300	—	—	
	2N2656	PSI	npn, TDP, si	1.2	.006	200	25	200	50	.01	250	10	.05	
	PT720	PSI	npn, TDP, si	1.2	.006	200	25	200	80	5	250	15	.05	
	PT886	PSI	npn, TDP, si	1.6	.01	175	22	—	—	.3	180	—	.150	
	PT887	PSI	npn, TDP, si	1.6	.01	175	45	—	—	.3	180	6	.750	
	PT888	PSI	npn, TDP, si	1.5	.01	175	45	—	—	.3	180	4	1.000	
	2N94	SY	npn, AJ, ge	2	150	85	2.5	*20	50	50	50	—	—	
	2N139	SY	pnp, AJ, ge	2(min.)	80	85	.75	*20	15	22-110	50	—	—	
	2N193	SY	npn, AJ, ge	2	150	85	2.5	*18	50	9	50	—	—	
HF 3	2N194	SY	npn, AJ, ge	2	150	85	2.5	*18	50	10	50	—	—	Mixer Converter
	2N194A	SY	npn, AJ, ge	2	150	85	2.5	*18	50	10	50	—	—	
	2N211	SY	npn, AJ, ge	2	50	70	1.1	*10	50	5-15	20	—	—	GI
	2N233A	SY	npn, AJ, ge	2	150	85	2.5	*18	50	30	50	—	—	
	2N413A	SY	pnp, AJ, ge	2	150	85	2.5	*15	200	—	10	—	—	
	2N515	SY	npn, AJ, ge	2	50	75	1	*18	10	25-50	50	—	—	IND, KF KF, NA
	2N516	SY	npn, AJ, ge	2	50	75	1	*18	10	5-15	50	—	—	
	2N517	SY	npn, AJ, ge	2	50	75	1	*18	10	10-60	50	—	—	
	2N519A	GI	pnp, AJ, ge	2	150	100	2	*25	—	25	1	12	14	
	2N1026	SSD	pnp, AJ, si	**2	250	175	1.7	35	100	18-44	0.025	—	7	
2N1469	SSD	pnp, AJ, si	**2	150	150	1.2	35	100	36	25	—	7	KF	
HF 4	2N1840	PSI	npn, TDP, si	2	.013	175	25	500	15	.3	180	—	—	IND, US, KF, GI
	2N413	RA	pnp, FA, ge	2.5	150	85	—	18	200	30	2.0	7	—	
	2N1342	PSI	npn, TDP, si	2.8	.018	175	150	300	12	.01	190	8	.7	GI, SY, TI
	2N356	RCA	pnp, AJ, ge	3	100	85	1.67	20	—	—	5	—	12	
	2N438	GI	npn, AJ, ge	3	100	85	1.67	*30	—	—	10	—	12	TI RA, TI TI
	2N438A	GI	npn, AJ, ge	3	150	85	2.5	*30	—	—	10	—	12	
	2N445A	GI	npn, AJ, ge	3	150	100	2	*30	—	70	2	12	14	
	2N481	US	pnp, AJ, ge	3	200	85	3	30	20	50	3	—	14	
	2N1302	TI	npn, ge	3	150	100	2.0	*25	300	20*	3	3.6	12	
	2N1564	PSI	npn, TDP, si	3	.02	175	80	50	30	.01	190	—	—	
2N1565	PSI	npn, TDP, si	3	.02	175	80	50	60	.01	190	—	—		
2N1566	PSI	npn, TDP, si	3	.02	175	80	50	130	.01	190	—	—		
2N1889	PSI	npn, TDP, si	3	.017	200	100	—	80	.001	190	—	—		
2N1890	PSI	npn, TDP, si	3	.017	200	100	—	200	.001	190	—	—		
2N1893	PSI	npn, TDP, si	3	.017	200	120	500	80	.001	190	—	—		
2N1893A	PSI	npn, TDP, si	3	.017	200	140	500	90	.001	190	—	—		
2N1506A	PSI	npn, TDP, si	3.5	.02	200	80	500	60	.005	190	10	1.3		
2N482	IND	pnp, AJ, ge	3.5	150	85	2.5	*14	200	50	3	—	12		
TR-482	IND	pnp, AJ, ge	3.5	150	85	2.5	14	200	20	3	—	12		
HF 6	PT1558	PSI	npn, TDP, si	4	.023	200	80	—	40	.005	210	10	1	Converter GI, TI KF, GI, AMP KF
	2N212	SY	npn, AJ, ge	4	150	85	2.5	*18	50	20	50	—	—	
	2N385	SY	npn, AJ, ge	4	150	100	2.0	*25	—	—	35	—	4	
	2N414A	SY	pnp, AJ, ge	4	150	85	2.5	*15	200	—	20	—	—	
	2N1027	SSD	pnp, AJ, si	**4	250	175	1.7	15	100	18	0.025	—	7	
	2N1058	SY	npn, AJ, ge	4	50	75	1	*18	—	15	50	—	—	Converter
	2N94A	SY	npn, AJ, ge	5	150	85	2.5	*20	50	19	50	—	—	
	2N292	GE	npn, AJ, ge	5	65	85	.9	15	20	6-44	5	—	—	TI TO-5 RF Switch, TI, RCA
	2N388A	RCA	npn, ge	5	150	—	—	*40	200	30*	—	—	—	
	2N395	RA	pnp, AJ, ge	5	150	85	—	25	—	—	2.0	—	12	
HF 7	2N439	GT	npn, AJ, ge	5	100	85	1.67	*30	—	—	10	—	12	SY, TI TI
	2N439A	RA	npn, AJ, ge	5	150	85	2.5	*30	—	—	10	—	12	
	2N448	GE	npn, RG, ge	5	65	85	1.1	15	20	25	5	—	2.4	
	2N520A	GI	pnp, AJ, ge	5	150	100	2	*25	—	100	1	12	14	
	2N634	GE	npn, AJ, ge	5	150	85	2.5	*20	—	—	5	—	12	
	2N483	IND	pnp, FA, ge	5.5	150	85	—	*12	20	60	3.0	—	—	US, TI GI, SY, TI TI TI
	2N357	RCA	npn, AJ, ge	6	100	85	1.67	*20	—	—	5	—	12	
	2N377	SY	npn, AJ, ge	6	150	100	2.0	*25	—	—	5	—	12	
	2N446A	GI	npn, AJ, ge	6	150	100	2	*30	—	120	2	12	14	
	2N483	US	pnp, AJ, ge	6	150	85	2.5	12	20	65	1.5	10	*12	



close matching



9 New Differential Amplifier Transistors feature close matching of characteristics: ΔV_{BE} as low as 5 mV maximum. ☐ Other features include: temperature tracking of V_{BE} — $\Delta (V_{BE1} - V_{BE2}) / \Delta T$ as low as $10 \mu V / ^\circ C$; extremely high beta — up to 50 min. at $1 \mu A$ matched to within 10%; and low noise typically 2db. Extremely low leakage — as low as 1nA max. at 30 volts. ☐ Because these devices eliminate common-mode signals and allow use of balanced inputs to minimize input drift, they find application in low drift DC amplifiers, operational amplifiers, telemetry, comparators and analog-digital converters. These new microelectronic devices have two closely matched low-level NPN silicon planar transistors, electrically isolated but thermally connected, in a single 6-lead TO-5 package. Production quantities are presently available. ☐ Sales Offices: Chicago, Illinois; Los Angeles, California; Oakland, New Jersey; Medford, Massachusetts; Sykesville, Maryland; Bethpage, L. I., New York. ☐ Write today for technical bulletin. SPERRY SEMICONDUCTOR, Norwalk, Connecticut.

SPERRY

DIVISIONS OF
SPERRY RAND
CORPORATION

ON READER-SERVICE CARD CIRCLE 444


May 24, 1963

T17

HF *continued*

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T *f _{db} (mc)	MAX. RATINGS			CHARACTERISTICS					Remarks	
					P _c (mw)	T _j (°C)	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{fe} *h _{FE}	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} (pf)		
HF 8	OC45	AMP	pnp, PADT, ge	6	83	75	—	*15	10	100	0.5	—	—	SY
	2N139	RCA	pnp, AJ, ge	6.8	80	85	1	16	15	48	6	8	—	SY
	2N218	RCA	pnp, AJ, ge	6.8	80	85	—	16	15	48	6	—	—	—
	2N409	RCA	pnp, AJ, ge	6.8	80	85	—	13	15	48	10	—	—	—
	2N410	RCA	pnp, AJ, ge	6.8	80	85	—	13	15	75	10	—	—	—
	2N414	RA	pnp, FA, ge	7	150	85	—	*15	200	60	2.0	6	—	IND, US, TS, GE, RCA, AMP, TI
	2N439	GI	pnp, AJ, ge	7	100	85	—	*20	400	45	3	—	9	TO-5 RF Switch, SY
	2N1090	RA	pnp, AJ, ge	7	150	85	—	18	100	50	3	—	—	TO-5 RF Switch
	CK14	RA	pnp, FA, ge	7	80	85	3	15	200	60	2.0	6	—	US
	2N485	IND	pnp, AJ, ge	7.5	200	85	—	30	20	50	3	—	—	—
HF 9	2N168A	GE	pnp, RG, ge	8	65	85	1.1	15	20	40	5	—	2.4	—
	2N169	GE	pnp, RG, ge	8	65	85	1.1	15	20	72	5	—	2.4	—
	2N293	GE	pnp, RG, ge	8	65	85	1.1	15	20	25	5	—	2.4	—
	2N388	GI	pnp, AJ, ge	8	150	100	2.0	*25	—	60	2.0	—	12	SY, TI
	2N396	RA	pnp, AJ, ge	8	150	85	—	20	—	60	—	—	12	TI
	2N449	GE	pnp, RG, ge	8	65	85	1.1	15	20	72	5	—	2.4	—
	2N471A	TR	pnp, GJ, si	8	200	200	30	25	10-25	.02	22	7	—	TI
	2N472A	TR	pnp, GJ, si	8	200	200	45	25	10-25	.02	22	7	—	TI
	2N581	RA	pnp, AJ, ge	8	100	85	—	15	100	30	3	—	12	TO-5 RF Switch, RCA
	2N597	PSI	pnp, TDP, si	.8	.006	150	40	—	*45	.01	250	—	—	—
HF 10	2N1086	GE	pnp, RG, ge	8	65	85	1.1	9	20	40	3	—	2.4	—
	2N1086A	GE	pnp, RG, ge	8	65	85	1.1	9	20	40	3	—	2.4	—
	2N1087	GE	pnp, RG, ge	8	65	85	1.1	9	20	40	3	—	2.4	—
	2N1121	GE	pnp, RG, ge	8	65	85	1.1	15	20	72	5	—	2.4	—
	2N1478	GI	pnp, le	8	150	100	2	*1	100	70	5	—	15	—
	2N1624	GI	pnp, ge	8	150	100	2	*0.5	30	120	5	—	20	—
	2N2085	GI	pnp, AJ, ge	9	100	85	1.67	*20	—	150	1	—	12	SY, TI
	2N358	GI	pnp, AJ, ge	9	150	100	2	*25	—	150	1	—	14	—
	2N321A	GI	pnp, AJ, ge	9	150	100	2	*25	—	150	1	—	14	—
	2N140	RCA	pnp, AJ, ge	10	80	85	—	16	15	75	6	8	—	SY
HF 11	2N219	RCA	pnp, AJ, ge	10	80	85	—	16	15	75	6	—	—	—
	2N411	RCA	pnp, AJ, ge	10	80	85	—	13	15	75	10	—	—	—
	2N414B	IND	pnp, AJ, ge	10	200	85	2.5	14	200	90	3	—	12	IND, KF
	2N416	RA	pnp, FA, ge	10	150	85	—	*12	200	80	2.0	4	—	IND, US, GI, TS, KF, AMP
	2N440	GI	pnp, AJ, ge	10	100	85	—	*30	—	—	10	—	12	SY, TI
	2N400A	GI	pnp, AJ, ge	10	150	85	2.5	*30	—	—	10	—	12	RA, TI
	2N447A	TR	pnp, GR, si	10	150	100	2	*30	—	150	2	12	14	—
	ST905	TR	pnp, GR, si	10	150	100	1.0	*30	—	65	0.1	25	7	—
	2N473	TR	pnp, GR, si	10	200	200	—	*15	25	20-50	.02	20	7	—
	2N474	TR	pnp, GR, si	10	200	200	—	*30	25	20-50	.02	20	7	—
HF 12	2N474A	TR	pnp, GJ, si	10	200	200	—	30	25	20-50	.02	20	7	—
	2N475	TR	pnp, GR, si	10	200	200	—	*45	25	20-50	.02	20	7	—
	2N484	US	pnp, FA, ge	10	150	85	—	*12	20	90	3.0	—	—	—
	2N2425	KF	pnp, AJ, si	10	372	200	—	50	50	60	0.1	10	7	JAN, TI
	2N118A	TR	pnp, GR, si	11	150	175	—	*30	25	19-90	0.1	27	7	—
	2N478	TR	pnp, GR, si	11	200	200	—	*15	25	40-100	0.2	20	7	—
	2N479	TR	pnp, GR, si	11	200	200	—	30	25	40-100	.02	20	7	—
	2N479A	TR	pnp, GJ, si	11	200	200	—	30	25	40-100	.02	20	7	—
	2N480	TR	pnp, GR, si	11	200	200	—	45	25	40-100	.02	20	7	—
	2N1417	TR	pnp, GR, si	11	150	150	—	*15	25	30-200	0.1	19	7	AMP
HF 13	2N1418	TR	pnp, GR, si	11	150	150	—	30	25	30-200	0.1	19	7	NA
	ST115	TR	pnp, GR, si	11	200	200	—	15	25	10-100	.02	22	7	2N332
	ST35	TR	pnp, GR, si	11	200	200	—	30	25	10-100	.02	22	7	—
	ST45	TR	pnp, GR, si	11	200	200	—	45	25	10-100	.02	22	7	—
	ST904A	TR	pnp, GR, si	11	150	150	1.0	30	—	60	0.1	25	7	—
	ST910	TR	pnp, GR, si	11	150	150	1.0	*30	—	140	0.1	20	7	TO-5, RF Switch, KF, TI, RCA
	2N397	RA	pnp, AJ, ge	12	150	85	3	30	20	80	2.0	—	12	RA, US
	2N486	IND	pnp, AJ, ge	12	150	85	—	30	20	100	3	—	6	—
	2N751	RA	pnp, DJ, si	12	150	175	—	20	50	4	0.01	—	20	—
	4C28	GE	pnp, GD, si	12	150	125	—	*40	25	15	2	20	*20	—
HF 14	4C29	GE	pnp, GD, si	12	150	125	—	*40	25	30	2	20	*20	—
	4C30	GE	pnp, GD, si	12	150	125	—	*40	25	55	2	20	*20	—
	4C31	GE	pnp, GD, si	12	150	125	—	*40	25	115	2	20	*20	—
	2N541	TR	pnp, GR, si	15	200	200	—	*15	25	80-200	0.2	20	7	NA, TI
	2N542	TR	pnp, GR, si	15	200	200	—	*30	25	80-200	0.2	20	7	NA, TI
	2N542A	TR	pnp, GJ, si	15	200	200	—	30	25	80-200	0.2	20	7	—
	2N543	TR	pnp, GR, si	15	200	200	—	*45	25	80-200	0.2	20	7	—
	2N602A	GI	pnp, DR, ft	15	120	85	2	*30	50	5	25	7	—	NA, TI
	2N1091	RA	pnp, AJ, ge	15	150	85	—	15	100	3	—	9	—	NA, TI
	2N2424	KF	pnp, AJ, si	15	372	200	—	40	50	80	0.1	—	7	TO-5 RF switch

HUGHES SEMICONDUCTOR BUYERS' GUIDE

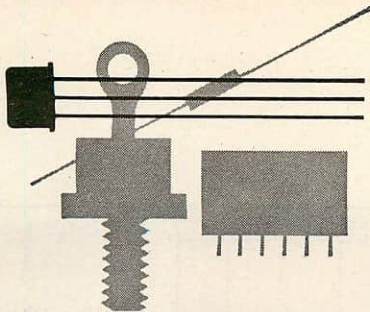

HUGHES® DIODES

Silicon MICROSEAL® Diodes — Zener and Computer Types With or without welded leads, or in circuit arrays (0.062" dia. x 0.030" thick). Rated 150 mW free air (minimum), 500 mW mounted in circuit boards, to 1 watt infinite heat sink. Microminiature devices for high density circuit applications. Representative Types are E.I.A. equivalents: 1N46-59, 1N625-27, 1N903-08, 1N914, 1N916, 1N1934-37, 1N3064 and 1N3067.

Silicon Zener Diodes Power Dissipation up to 500 mW. Hard backs with extremely low noise and dynamic impedance. Stable alloy process. Excellent voltage regulation as low as $\pm 3\%$ at low current level. Representative Types: 1N702-726A, 1N746-759A, 1N957-975B, 1N761-769, 1N1929-1937.


Silicon Capacitor Diodes Medium Q devices with good stability and low leakage. Capacitance ranges from 20 to 100 pf (tolerance as low as $\pm 5\%$) with maximum bias voltage variations up to 150 volts. Representative Types: 1N950-956.

Silicon Computer Diodes Diffused planar passivated. Inverse working voltages to 100 volts. Recovery times as low as 2 nsec using a sampling scope circuit. Representative Types: 1N903-08, 1N914, 1N916, 1N3064 and 1N3067.

Germanium Point Contact Diodes The first industry standard subminiature glass general purpose and computer diode. Proven stability with inverse working voltages to 190 volts. Recovery times as low as 0.75 nsec using a sampling scope. Representative Types: 1N198B, 1N933, HPS, 1600 series.

Germanium Gold Bonded Diodes General purpose and computer applications. Recovery times as low as 3.5 nsec. Improved rugged mechanical stability withstands 30,000 G's centrifuge and 3,000 G's shock. Representative Types: 1N270, 1N276, 1N277 and HD1800 series.

Silicon General Purpose Alloy Diodes and Rectifiers Power Dissipation to 250 mW. Forward currents to 0.2 amps. Oxide-coated (surface passivated) units with working inverse voltages up to 1,000 volts. Representative Types: 1N456-459, 1N482B-488B, 1N846-889.

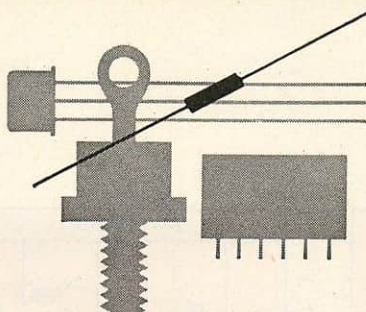


HUGHES TRANSISTORS

PNP Silicon Alloy Junction Transistors 2N1034, 2N1035, 2N1036, 2N1037, 2N1228 through 2N1234, 2N1238 through 2N1244, 2N327A, 2N328A, (also USA 2N328A), 2N329A, HA7597, HA7598, HA7599, HA7520 through HA7529, HA7530, through HA7539... available in the standard TO-5 package or the Hughes coaxial package with up to 5 watts power dissipation. Manufactured by the evaporative-fusion technique which creates unusually low saturation resistance. Retain highly uniform characteristics from batch to batch, making possible much closer tolerances in the design of small-signal, high-temperature and amplifier circuits.

PNP Silicon Double Diffused Planar Transistors 2N1254, 2N1255, 2N1256, 2N1257, 2N1258, 2N1259, HA9048, HA9049, 2N1196, 2N1197, (also USA 2N1197), 2N869, 2N995... most types available in any package configuration... TO-5, TO-18, TO-46, the Hughes MICROSEAL transistor... or any industry standard package. Offer many outstanding features: low collector capacitance, good low- and high-level gain characteristics, low leakage currents, low stored base charge, typical f_t of 75 mc. High breakdown voltages in combination with gains, plus exceptionally fast-switching capabilities, make these superior general purpose units. 2N1131, 2N1131A, 2N1132, 2N1132A, 2N1132B, 2N1991... available in any package configuration... TO-5, TO-18, TO-46, the Hughes MICROSEAL transistor... or any industry standard package. Used extensively in advanced missile, satellite and computer applications. Feature high breakdown voltages, exceptionally low leakage currents, typically 20 nanoamps, measured at stringent bias conditions. Most types offer guaranteed switching times of less than 50 nanoseconds.

NPN Silicon Double Diffused Planar Transistors 2N706, 2N706A, 2N706B, 2N707, 2N726, 2N753 Planar, 2N1613, 2N708 Planar, 2N743, 2N744 Epitaxial, 2N913, 2N914 Planar Epitaxial... available in any package configuration... TO-5, TO-18, TO-46, the Hughes MICROSEAL transistor... or any industry standard package.

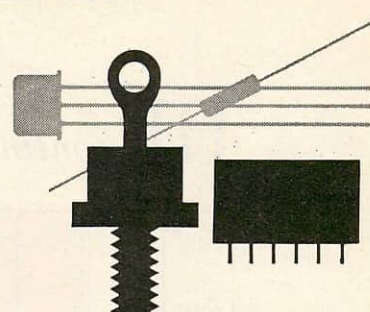

HUGHES RECTIFIERS

Miniature High-Power Rectifiers These 1 amp devices are available from 50 to 3,000 volts PIV in the DO-7 package.

Standard Metal Package Rectifiers Available at ratings of 6, 12, 20 and 35 amps. PIV ratings are from 50 to 1,000 volts for the 6 and 12 amp packages. (DO-4 and DO-10), and from 50 to 600 volts in the 20 and 35 amp packages (DO-5 and DO-11).

Fast-Switch Rectifiers Hughes' new HF series (1 to 30 amp) "Golden Line" rectifiers have recovery times of less than 200 nanoseconds. Typical room temperature reverse leakage currents at rated PIV of 15 to 80 μ amps for 1 to 30 amp devices, respectively. Maximum forward voltage drop of less than 1.4 volts at rated current.

Stacked Rectifiers and Assemblies Custom designed stacked rectifiers are available up to 60 kv with currents up to 20 amp. These designs make use of the R-C compensation to assure long life and high reliability.

Bridge assemblies for 3-phase and single-phase designs and potted configurations available—minimum deliveries and costs.

HUGHES PACKAGED ASSEMBLIES

Packaged Assemblies Standard and custom assemblies encapsulated in epoxy. These offer impressive savings in time, money and space.

Typical assemblies include: single-phase and 3-phase bridges, voltage doublers and quadruplers, ring modulators, matched pairs, matched quads, phase detectors, computer modules, cartridge rectifiers or any custom units.

For more details on any of these products contact your nearest Hughes representative. Or write: Hughes Semiconductor Division Marketing Department, Newport Beach, California.

DIODES • TRANSISTORS • RECTIFIERS
PACKAGED ASSEMBLIES • CRYSTAL FILTERS

*Trademark Hughes Aircraft Company
Creating a new world with electronics

HUGHES

HUGHES AIRCRAFT COMPANY
SEMICONDUCTOR DIVISION



HF *continued*

Cross Index Key	Type No.	Mfr.	Type	f_{ae} $\cdot f_T$ $\cdot f_{ab}$ (mc)	MAX. RATINGS					CHARACTERISTICS					Remarks
					P (mv)	T _i (°C)	mW/°C	V _{CEO} V _{CBO} (v)	I _C (ma)	h _{FE} h _{FE}	I _{CO} (μa)	NF (db)	C _{oe} C _{ob} (pf)		
HF 15	OC44	AMP	pnnp,PADT,ge	15	83	75	—	*15	10	100	0.5	—	—	TI TI TI KF, TI TO-5 RF switch, TI SPR, KF, MIL SPR SPR IND, US, GI, TS, KF, TI	
	2N388A	TI	npn,AJ,ge	**16	150	—	—	40	200	*60-180	5	—	—		
	2N476	TR	npn,GJ,si	17	200	200	—	*15	25	30-60	.02	19	8		
	2N477	TR	npn,GJ,si	17	200	200	—	*30	25	30-60	.02	19	8		
	2N522A	GI	pnnp,AJ,ge	17	150	100	2	*25	—	200	1	12	14		
	2N582	RA	pnnp,AJ,ge	18	100	85	—	*14	100	60	3	—	—		
	2N1118	PH	pnnp,SAT,si	18	150	140	1.3	*25	50	20	—	—	—		
	2N1118A	PH	pnnp,SAT,si	18	150	140	1.3	*25	50	25	—	—	—		
	2N232	PH	pnnp,SBT,ge	20	9	55	0.9	*4.5	4.5	39	6	—	—		
2N417	RA	pnnp,FA,ge	20	150	85	—	*10	200	140	2.0	4	—	—		
HF 16	2N602	GI	pnnp,Dr,ge	20	120	85	2	*20	—	—	3	14	4	TI hi freq., hi pwr hi freq., hi pwr. Hi frequency,	
	2N1899	PSI	npn,DM,si	20	125	150	1000	140	10a	10	20ma	—	—		
	2N1902	PSI	npn,DM,si	20	125	150	1	140	10a	10	20	—	—		
	2N1903	PSI	npn,DM,si	20	125	150	1	140	10a	10	20	—	—		
	2N1904	PSI	npn,DM,si	20	125	150	1	140	10a	10	20	—	—		
	2N1907	TI	pnnp,AD,ge	*20	150	—	—	100	20a	*10	0.3ma	—	—		
	2N1908	TI	pnnp,AD,ge	*20	150	—	—	130	20a	*10	0.3ma	—	—		
	2N2551	HU	pnnp,A,si	*20	400	160	3.0	.150	.1	*90	6	*1.0	—		
	PT900	PSI	npn,DM,si	20	125	150	1000	80	10a	3	40	—	—		
	PT901	PSI	npn,MS,si	20	125	150	1000	140	10a	10	30	—	—		
HF 17	2N495	PH	pnnp,SA,si	21	150	140	1.3	*25	50	30	.002	—	*6	MIL IND, KF SPR, chopper hi freq., hi pwr. hi freq., hi pwr. SY	
	2N523A	GI	pnnp,AJ,ge	23	150	100	2	*20	—	300	1	12	14		
	2N1428	PH	pnnp,SAT,si	23	100	140	0.86	*6	50	45	.001	—	*7		
	2N1429	PH	pnnp,SAT,si	23	100	140	0.86	*6	50	45	.001	—	*7		
	2N1677	PH	pnnp,SAT,si	23	100	140	0.87	*4.5	50	50	.001	—	*7		
	2N1065	GI	pnnp,Dr,ge	25	120	85	2	*40	—	—	4	12	3		
	2N1900	PSI	npn,DM,si	25	125	150	1000	140	5a	10	20ma	—	—		
	2N1901	PSI	npn,DM,si	25	125	150	1000	140	a	15	20ma	—	—		
	2N274	RCA	pnnp,Dr,ge	30	120	85	—	*40	10	60	16	—	—		
2N370	RCA	pnnp,Dr,ge	30	24	85	—	*40	10	60	20	—	—			
HF 18	2N371	RCA	pnnp,Dr,ge	30	80	85	—	20	10	—	20	—	—	SY Mixer, SY SY converter, SY GI, AMP, SY AMP AMP Hi freq., hi pwr. Hi freq., hi pwr.	
	2N372	RCA	pnnp,Dr,ge	30	80	85	—	20	10	60	20	—	—		
	2N373	RCA	pnnp,Dr,ge	30	80	85	—	25	10	60	8	—	—		
	2N374	RCA	pnnp,Dr,ge	30	80	85	—	25	10	60	8	—	—		
	2N1224	RCA	pnnp,Dr,ge	30	120	85	—	*40	10	60	12	—	—		
	2N1226	RCA	pnnp,Dr,ge	30	120	85	—	*60	10	60	16	—	—		
	2N1395	RCA	pnnp,Dr,ge	30	120	85	—	*40	10	90	16	—	—		
	2N1709	PSI	npn,DM,si	30	130	175	86.7	75	1.2a	—	—	—	40		
2N1710	PSI	npn,DM,si	30	130	175	86.7	60	1.2a	—	—	—	40			
2N1750	PH	pnnp,SBT,ge	30	15	75	0.5	*14	5	*18	50	2	—	*6		
HF 19	2N2225	KF	pnnp,AJ,ge	30	220	100	—	15	500	300	—	3	10	— *6 6 GI GI GI GI	
	2N2595	SSD	pnnp,DP,si	*30	4.0	200	2.3	60	—	15-60	25na	—	—		
	2N2598	SSD	pnnp,DP,si	*30	4.0	200	2.3	80	—	15-60	25na	—	—		
	MHT-6001	MH	npn,DP,si	30	40	175	270	*100	5a	10-120	1	—	—		
	2N1425	RCA	pnnp,Dr,ge	33	80	71	—	24	10	50	12	—	—		
	2N1426	RCA	pnnp,Dr,ge	33	80	71	—	24	10	130	12	—	—		
	2N1524	RCA	pnnp,Dr,ge	33	80	71	0.4	24	10	60	16	—	—		
	2N1525	RCA	pnnp,Dr,ge	33	80	71	0.4	24	10	60	16	—	—		
	2N1526	RCA	pnnp,Dr,ge	33	80	71	0.4	24	10	130	16	—	—		
2N1527	RCA	pnnp,Dr,ge	33	80	71	0.4	24	10	130	16	—	—			
HF 20	2N934	RCA	pnnp,ge	*35	150	—	—	13	200	*60	—	—	—	TI GI GI GI GI	
	2N603	GI	pnnp,Dr,ge	40	120	85	2	*30	—	—	3	14	3		
	2N603A	GI	pnnp,DR,ft	40	120	85	2	*30	50	60	5	25	5		
	2N750	RA	npn,DJ,si	40	150	175	0.75	50	50	7	10	—	—		
	2N1633	RCA	pnnp,Dr,ge	40	80	71	0.4	34	10	75	16	—	—		
	2N1634	RCA	pnnp,Dr,ge	40	80	71	0.4	34	10	75	16	—	—		
	2N1638	RCA	pnnp,Dr,ge	40	80	71	0.4	34	10	75	7	—	—		
	2N3746	RCA	pnnp,Dr,ge	40	80	71	—	34	20	.985	16	—	—		
2N640	RCA	pnnp,Dr,ge	42	80	85	0.75	34	10	60	5	—	—			
2N641	RCA	pnnp,Dr,ge	42	80	85	0.75	34	10	60	7	—	—			
HF 21	2N642	RCA	pnnp,Dr,ge	42	80	85	0.75	34	10	60	7	—	—	GI TMT839 (150mw) TMT840 (150mw) GI GI GI	
	2N754	TR	npn,DJ,si	44	300	175	—	*60	50	20-80	1	—	—		
	2N755	TR	npn,DJ,si	44	300	175	—	*100	50	20-80	1	—	—		
	2N839	TR	npn,DJ,si	44	300	175	—	*45	25	20-45	0.1	15	—		
	2N840	TR	npn,DJ,si	44	300	175	—	*45	25	40-90	0.1	15	—		
	TMT842	TR	npn,DJ,si	44	150	175	—	*45	25	20	0.1	—	—		
	2N1196	HU	pnnp,MS,si	45	35	200	2	70	—	—	—	—	6		
	2N1631	RCA	pnnp,Dr,ge	45	80	71	0.4	34	10	80	16	—	—		
	2N1632	RCA	pnnp,Dr,ge	45	80	71	0.4	34	10	80	16	—	—		
2N1635	RCA	pnnp,Dr,ge	45	80	71	0.4	34	10	75	16	—	—			

TEKTRONIX TRANSISTOR-CURVE TRACER

INVALUABLE TOOL FOR EVALUATING SEMICONDUCTOR DEVICES

With a Type 575, you can plot and measure 7 different transistor characteristics. You can display 4 to 12 curves per family—with input current from 1 microampere/step to 200 milliamperes/step or input voltage from 10 millivolts/step to 200 millivolts/step—in repetitive or single-family presentations. You can select either common-emitter or common-base configurations.

The Type 575 provides 20-ampere collector displays (10-ampere average supply current), two ranges of collector supply (0 to 20 volts, 0 to 200 volts), and 2.4-ampere base supply (positive or negative base stepping).

Add a Type 175 Adapter and you extend the range of collector displays 10 times and the range of base supply 5 times.

You can also test diodes under a wide variety of conditions and observe waveform characteristics on the 5-inch crt with a high degree of accuracy.

Type 575 Calibrated Displays

Vertical Axis—Collector Current, 16 steps from 0.01 ma/div to 1000 ma/div. Pushbuttons are provided for multiplying each current step by 2 and dividing by 10, increasing the current range to 0.001 ma/div to 2000 ma/div.

Horizontal Axis—Collector Voltage, 11 steps from 0.01 v/div to 20 v/div.

Both Axes—Base Voltage, 6 steps from 0.01 v/div to 0.5 v/div. Base Current, 17 steps from 0.001 ma/div to 200 ma/div. Base Source Voltage, 5 steps from 0.01 v/div to 0.2 v/div.

Type 575 Transistor-Curve Tracer \$1075

U.S. Sales Prices f.o.b. Beaverton, Oregon



HIGH-CURRENT ADAPTER

For measuring high-powered semiconductor devices which exceed the current capabilities of a Type 575, ask your Tektronix Field Engineer about the Type 175 High-Current Adapter. Not intended for separate use, the Type 175 depends upon the circuitry and crt of a Type 575 to provide 200-ampere collector displays, three ranges of collector supply, and 12-ampere base supply—for calibrated displays with Collector Current on the Vertical Axis and either Collector Voltage or Base Voltage on the Horizontal Axis.

Type 175 Transistor-Curve Tracer High-Current Adapter \$1475



HIGH-VOLTAGE TYPE 575

Supplied on order from your Tektronix Field Engineer is a special model of the Type 575 Transistor-Curve Tracer. Although similar to the Type 575, the special model provides much higher diode breakdown test voltage (variable from zero to 1500 volts at a maximum current of 1 milliamperes) and also much higher Collector Supply (up to 400 volts, at 0.5 ampere).

For complete specifications of this special model—call your Tektronix Field Engineer.

Type 575 Mod 122C \$1325

. . . for more information about evaluating semiconductor devices with a Type 575 or other Tektronix test equipment, please call your Tektronix Field Engineer. He will be glad to assist you.


Tektronix, Inc. / P. O. BOX 500 • BEAVERTON, OREGON / (Area Code 503) Mitchell 4-0161 • TWX: 503-291-6805 •
Telex: 036-691 • Cable: TEKTRONIX • OVERSEAS DISTRIBUTORS IN 27 COUNTRIES

Tektronix Field Offices are located in principal cities throughout the United States. Please consult your Telephone Directory.
Tektronix Canada Ltd: Montreal, Quebec • Toronto (Willowdale) Ontario • Tektronix Ltd., Guernsey, Channel Islands

ON READER-SERVICE CARD CIRCLE 446

HF *continued*

Cross Index Key	Type No.	Mfr.	Type	t_{oe} * f_T ** f_{ab} (mc)	MAX. RATINGS				CHARACTERISTICS					Remarks
					P_c (mw)	T_j (°C)	$m_w/°C$	V_{CEO} + V_{CBO} (v)	I_C (ma)	h_{FE}	I_{CO} (μ a)	NF (db)	C_{ob} * C_{ob} (pf)	
HF 22	2N1635	RCA	pnp,Dr,ge	45	80	71	0.4	34	10	75	16	—	—	GI
	2N1637	RCA	pnp,Dr,ge	45	80	71	0.4	34	10	80	5	—	—	GI
	2N1639	RCA	pnp,Dr,ge	45	80	71	0.4	34	10	75	7	—	2	GI
	2N344	PH	pnp,SB,ge	50	20	55	1.33	*5	5	22	0.7	—	*3	SPR
	2N345	PH	pnp,SA,ge	50	20	55	1.33	*5	5	35	0.7	—	*3	SPR
	2N393	PH	pnp,MA,ge	50	25	100	0.63	*6	50	155	5	—	*2	SPR,GI
	2N604	GI	pnp,Dr,ge	50	120	85	2	*30	—	—	4	14	3	TI
	2N738	AI	pnp,P,si	**50	1.0w	—	—	*125	—	*15	.01	—	*8.0	—
	2N739	AI	pnp,P,si	**50	1.0w	—	—	*125	—	*30	.01	—	*8.0	—
	2N740	AI	pnp,P,si	**50	1.0w	—	—	*125	—	*60	1.0	—	*8.0	—
HF 23	2N759	GE	npn,si	**50	500	200	—	45	—	36	0.2	—	8	Planar Passivated
	2N760	GE	npn,si	**50	500	200	—	45	—	76	0.2	—	8	Planar Passivated
	2N760A	AI	npn,P,si	**50	1.5w	—	—	*60	—	*205	0.01	—	*8.0	—
	2N870	AI	npn,P,si	**50	1.8w	—	—	*100	—	*200	.01	—	*8.0	—
	2N871	AI	npn,P,si	**50	1.8w	—	—	*100	—	*200	0.01	—	*8	—
	2N910	AI	npn,P,si	**50	1.8w	—	—	*100	—	*75	2.05	—	*8.0	—
	2N911	AI	npn,P,si	**50	1.8w	—	—	*100	—	*35	2.05	—	*8.0	—
	2N912	AI	npn,P,si	**50	1.8w	—	—	*100	—	*15	2.05	—	*8.0	—
	2N956	AI	npn,P,si	**50	1.8w	—	—	*75	—	*200	0.01	—	*8	—
	2N988	AI	npn,P,si	**50	1.8w	—	—	*100	—	*5000	.01	—	*8.0	—
HF 24	2N1564	AI	npn,P,si	**50	1.2w	—	—	*80	—	*15	1.0	—	*8.0	—
	2N1565	AI	npn,P,si	**50	1.2w	—	—	*80	—	*30	.01	—	*8.0	—
	2N1566	AI	npn,P,si	**50	1.2w	—	—	*80	—	*60	.01	—	*8.0	—
	2N1572	AI	npn,P,si	**50	1.2w	—	—	*125	—	*15	1.0	—	*8.0	—
	2N1573	AI	npn,P,si	**50	1.2w	—	—	*125	—	*30	1.0	—	*8.0	—
	2N1574	AI	npn,P,si	**50	1.2w	—	—	*125	—	*60	1.0	—	*8.0	—
	2N1889	AI	npn,P,si	**50	3.0w	—	—	*100	—	*200	0.01	—	*8	—
	2N1890	AI	npn,P,si	**50	3.0w	—	—	*100	—	*200	0.01	—	*8	—
	2N1972	AI	npn,P,si	**50	3.0w	—	—	—	—	—	—	—	*8.0	—
	2N1973	AI	npn,P,si	**50	3.0w	—	—	*100	—	*75	2.5	—	*8	—
HF 25	2N1974	AI	npn,P,si	**50	3.0w	—	—	*100	—	*35	2.5	—	*8	—
	2N1975	AI	npn,P,si	**50	3.0w	—	—	*100	—	*15	2.05	—	*8.0	—
	2N1983	AI	npn,P,si	**50	2.0w	—	—	*90	—	2.0	5.0	—	*8.0	—
	2N1984	AI	npn,P,si	**50	2.0w	—	—	*50	—	2.0	5.0	—	*8.0	—
	2N1985	AI	npn,P,si	**50	2.0w	—	—	*50	—	*85	5.0	—	*8.0	—
	2N1986	AI	npn,P,si	**50	2.0w	—	—	*50	—	*130	5.0	—	*8.0	—
	2N1987	AI	npn,P,si	**50	2.0w	—	—	*50	—	*60	5.0	—	*8.0	—
	2N1988	AI	npn,P,si	**50	2.0w	—	—	*100	—	*85	5.0	—	*8.0	—
	2N1989	AI	npn,P,si	**50	2.0w	—	—	*100	—	*40	5.0	—	*8.0	—
	2N1990	AI	npn,P,si	**50	2.0w	—	—	*100	—	*20	—	—	*8.0	—
HF 26	2N2060	AI	npn,P,si	**50	1.5w	—	—	*100	—	*50	—	—	*8.0	—
	2N2223	AI	npn,P,si	**50	1.6w	—	—	*100	—	*150	.01	—	*8.0	—
	2N2223A	AI	npn,P,si	**50	1.6w	—	—	*100	—	*150	.01	—	*8.0	—
	2N2453	AI	npn,P,si	**50	0.6w	—	—	*60	—	*80	.005	—	*8.0	—
	2N2463	AI	npn,P,si	**50	1.2w	—	—	*60	—	—	.01	—	*8.0	—
	2N2484	AI	npn,P,si	**50	1.2w	—	—	*60	—	*30	.01	—	*8.0	—
	2N2590	SSD	pnp,DP,si	*50	4.0	200	2.3	60	20	30-80	25na	—	*5	—
	3N36	GE	npn,MB,ge	50	30	85	0.5	6	20	2.2	3	—	2	—
	ASA-2	AI	npn,P,si	**50	75w	—	—	*60	—	*45	.01	—	*8.0	—
	ASA-31	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	tetrode
HF 27	ASA-51	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	—
	ASA-100	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	—
	ASA-1000	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	—
	ASA-1003	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	—
	ASA-1004	AI	npn,P,si	**50	—	—	—	—	—	—	—	—	*8.0	—
	2N1197	HU	pnp,MS,si	55	38w	200	2	70	—	—	—	—	4	—
	2N604A	GI	pnp,DR,ft	60	12w	85	2	*30	50	70	5	25	5	—
	TR3100	IND	npn,DM,si	*60	60w-25C	300	4	*150	500	*30	0.01	—	10	—
	TR3101	IND	npn,DM,si	*60	60w-25C	300	4	*180	500	*25	0.01	—	15	—
	TR3301	IND	npn,DM,si	*60	60w-25C	300	4	*300	500	*30	0.01	—	25	—
HF 28	2N128	PH	pnp,SB,ge	60	25	85	0.82	*10	5	40	0.6	10	*2.5	SPR, MIL
	2N841	TR	npn,DJ,si	64	30w	175	—	45	25	80-330	0.1	15	8	TMT841 (150 mw)
	TMT843	TR	npn,DJ,si	64	15w	175	—	45	25	40	0.1	—	6	—
	2N929	AI	npn,P,si	**70	0.1w	—	—	*45	—	*200	.01	—	*8.0	—
	2N930	AI	npn,P,si	**70	0.1w	—	—	*45	—	*200	.01	—	*8.0	—
	2N990	AMP	pnp,PAOT,ge	70	67	75	1.33	20	10	75	—	—	—	RF, Mixer, Oscillator
	2N991	AMP	pnp,PAOT,ge	70	67	75	1.33	*20	10	75	—	—	—	RF, Mixer, Oscillator
	2N992	AMP	pnp,PAOT,ge	70	67	75	1.33	*20	10	75	—	—	—	RF, Mixer, Oscillator
	2N1335	PSI	pnp,MS,si	70	2.1w	150	24	120	75	13	8	—	4	High freq., high power
	2N1336	PSI	npn,MS,si	70	2.1w	150	24	120	75	13	8	—	4	High freq., high power

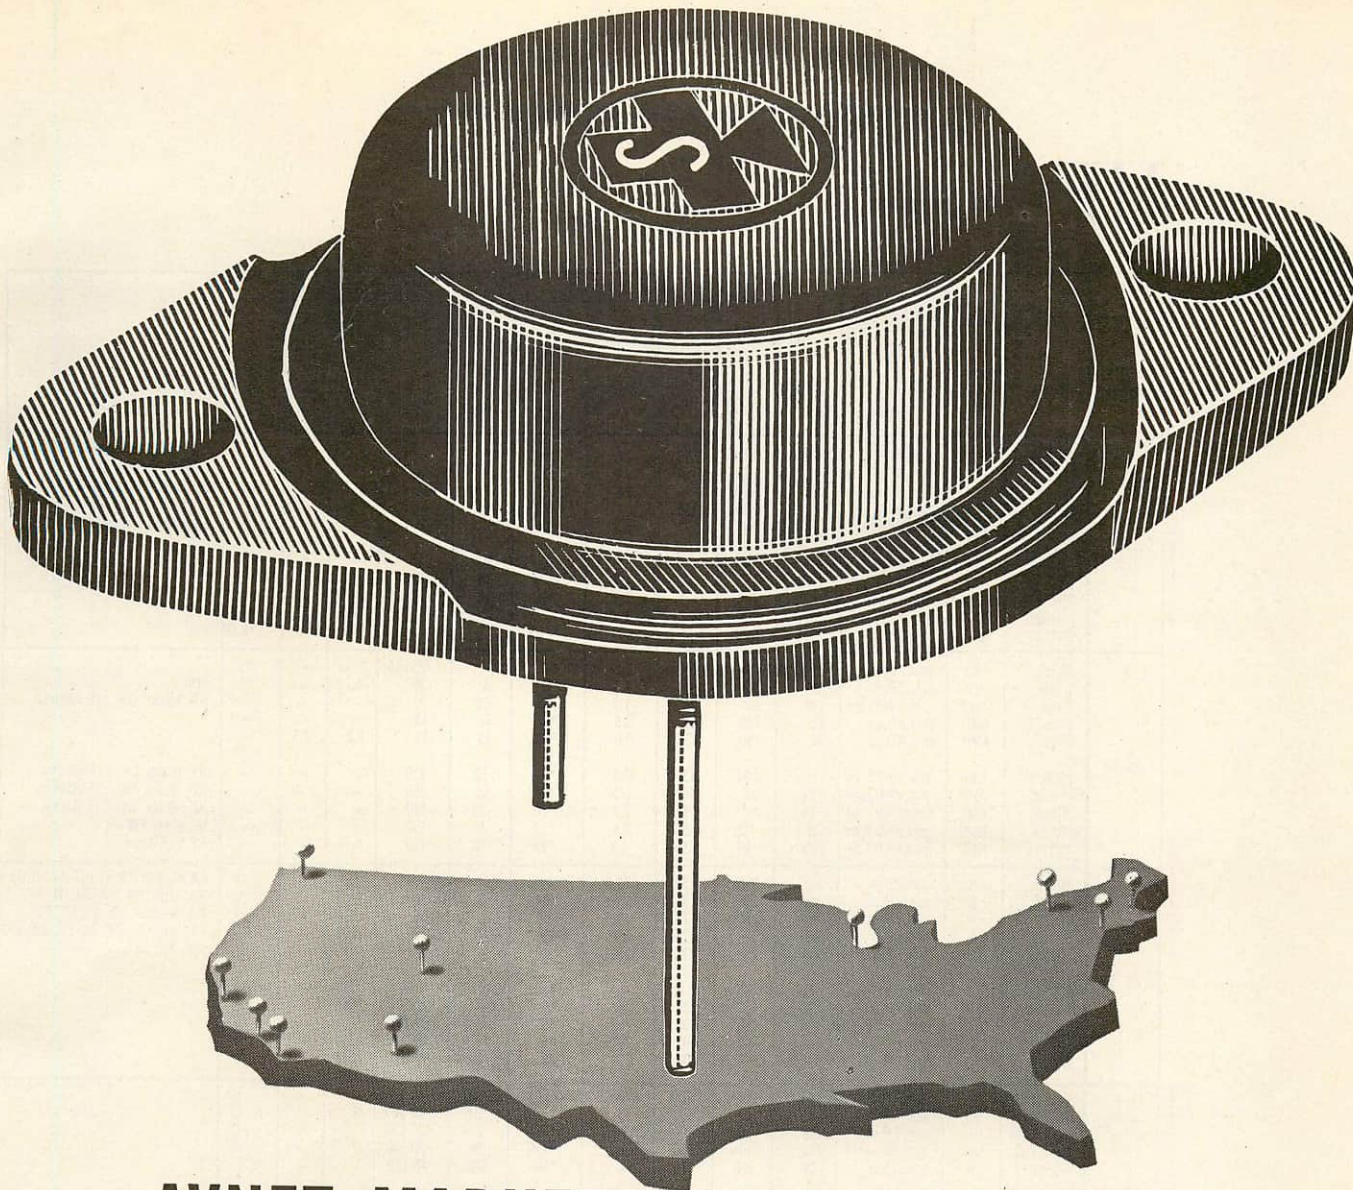

AVNET MARKETS S.T.C. PRODUCTS


Your requirements of STC silicon power transistors can be met by Avnet. Your Local Avnet Headquarters offers quick and flexible service on the products of Silicon Transistor Corporation... over 150 2N Type Numbers in 12 package sizes from 5 to 300 watts; 21 MIL approvals. When you need silicon power transistors, take

advantage of Avnet's on-time delivery of STC products, featuring miniaturized power transistors without heat sink; isolated collector; PNP with NPN complements. Stocks in depth on either standard or hard-to-get items are part of Avnet's comprehensive marketing assistance. There are 10 Local Avnet Headquarters.

10 Local Avnet Headquarters

SAN DIEGO, CALIF., 714-224-3633; LOS ANGELES, CALIF., 213-UP 0-6141; SUNNYVALE, CALIF., 408-RE 6-0300; SEATTLE, WASH., 206-GL 4-4911; PHOENIX, ARIZ., 602-273-1261; SALT LAKE CITY, UTAH, 801-486-7566; CHICAGO, ILL., 312-GL 5-8160; SYRACUSE, N. Y., 315-454-3238; WESTBURY, L. I., N. Y., 516-ED 3-5800; BURLINGTON, MASS., 617-BR 2-3060


AVNET S.T.C.

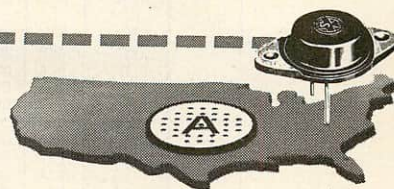

THE AVNET SYSTEM
Men/Methods/Materials/Management
AVNET ELECTRONICS CORP.

HF continued

Cross Index Key	Type No.	Mfr.	Type	f_{ae} * f_T ** f_{db} (mc)	MAX. RATINGS				CHARACTERISTICS				Remarks
					T_j (°C)	$m_w/°C$	V_{CEO} * V_{CBO} (v)	I_C (ma)	h_{fe} * h_{FE}	I_{CO} (μ a)	NF (db)	C_{oe} * C_{ob} (pf)	
HF 29	2N1337	PSI	npn,MS,si	70	150	24	120	75	13	8	—	4	High freq., high power
	2N1339	PSI	npn,MS,si	70	150	24	120	75	—	8	—	4	High freq., high power
	2N1340	PSI	npn,MS,si	70	150	24	120	75	—	8	—	4	High freq., high power
	2N1341	PSI	npn,MS,si	70	150	24	120	75	—	8	—	4	High freq., high power
	2N1505	PSI	npn,MS,si	70	175	0.2	50	—	7	—	—	20	high freq., high power
	2N1506	PSI	npn,MS,si	70	175	2	60	9	—	—	—	8	High freq., high power
HF 30	2N1516	AMP	ppp,PADT,ge	*70	—	1.7	*20	10	100	—	—	—	RF-IF
	2N1517A	AMP	ppp,PADT,ge	*70	—	1.7	*40	10	150	—	—	—	RF-IF
	2N2509	AI	npn,P,si	**70	—	—	*125	—	—	.001	—	*8.0	—
	2N2510	AI	npn,P,si	**70	—	—	*100	—	—	.005	—	*8.0	—
	2N2591	SSD	ppp,DP,si	*70	200	2.3	60	—	50-135	25na	—	*5	SPR
	2N346	PH	ppp,SB,ge	75	55	1.3	*5	5	35	0.7	—	*3	RF, Mixer, Osc., IF AM rec.
HF 31	2N393	AMP	ppp,PADT,ge	75	75	0.6	*20	10	75	—	—	—	—
	2N2672	AMP	ppp,AD,ge	75	85	0.6	*32	10	150	—	1.5	—	—
	2N2089	AMP	ppp,PADT,ge	75	100	0.6	*32	10	150	—	—	—	—
	2N2090	AMP	ppp,PADT,ge	75	67	0.6	*32	10	150	—	—	—	—
	2N2091	AMP	ppp,PADT,ge	75	83	0.6	*20	10	150	—	—	—	—
	2N2092	AMP	ppp,PADT,ge	75	100	0.6	*32	10	150	—	—	—	—
HF 32	2N2093	AMP	ppp,PADT,ge	75	100	1.7	*25	10	150	—	—	—	—
	2N696	FA	npn,DP,si	80	175	13.3	40	—	40	0.1	—	18	RA,MO,PSI,TR,TI,IND,SY,GI,US
	2N698	FA	npn,DP,si	80	175	13.3	*80	—	30	0.1	—	12	RA,IND,TR,NA,GI,TI,PSI
	2N699	FA	npn,DP,si	80	175	13.3	80	—	65	.01	—	12	RA,NA,MH,GI,TI,US,PSI
	2N706	FA	npn,DP,si	80	175	6.7	25	—	12	.005	—	5	RA,NA,CL,GI,TI,TR,GE,MO
	2N1252	FA	npn,DP,si	80	175	13.3	20	—	35	0.1	—	30	RA,TR,TI
HF 33	2N2511	AI	npn,P,si	**80	—	—	*80	—	*80	.005	—	*8.0	—
	2N2596	SSD	ppp,DP,si	*80	200	2.3	60	—	40-100	25na	—	*6	—
	2N2597	SSD	ppp,DP,si	*80	200	2.3	60	—	80-200	25na	—	*6	—
	2N2599	SSD	ppp,DP,si	*80	200	2.3	80	—	40-100	25na	—	*6	—
	2N2600	SSD	ppp,DP,si	*80	200	2.3	80	—	80-200	25na	—	*6	—
	MHT-4401	MH	npn,EP,si	80	200	23	*60	500	20-120	1	—	30	—
HF 34	MHT-4501	MH	npn,EP,si	80	200	23	*120	500	20-120	2	—	20	—
	MHT-4502	MH	npn,EP,si	80	200	57	*60	1a	20-120	1	—	25	—
	2N844	TR	npn,DJ,si	86	175	—	*60	50	40-120	2	—	29	—
	2N845	TR	npn,DJ,si	86	175	—	*100	50	40-120	1	—	8	—
	2N2592	SSD	ppp,DP,si	*90	200	2.3	60	—	100-200	25na	—	*5	—
	3N37	GE	npn,MG,ge	90	85	0.5	6	—	1.1	3	—	1.5	tetode
HF 35	2N384	RCA	ppp,Dr,ge	100	80	—	30	10	60	16	—	—	RA,PSI,TR,US,MO,SY,NA,GI,TI
	2N697	FA	npn,DP,si	100	175	13.3	40	75	0.01	—	18	—	—
	2N702	GI	npn,si	100	175	2.4	*5	10	40	0.05	—	—	CL
	2N703	GI	npn,si	100	175	2.4	*5	10	70	0.5	—	—	CL
	2N735A	SSD	npn,DP,si	*100	200	2.3	60	—	40-100	5na	—	*6	—
	2N736B	SSD	npn,DP,si	*100	200	2.3	60	—	80-200	5na	—	*6	—
HF 36	2N739A	SSD	npn,DP,si	*100	200	2.3	80	—	40-100	5na	—	*6	—
	2N740A	SSD	npn,DP,si	*100	200	2.3	80	—	80-200	5na	—	*6	—
	2N758B	SSD	npn,DP,si	*100	200	2.3	60	—	18-90	5na	—	*6	—
	2N759B	SSD	npn,DP,si	*100	200	2.3	60	—	36-90	5na	—	*6	—
	2N760B	SSD	npn,DP,si	*100	200	2.3	60	—	76-333	5na	—	*6	—
	2N920	GI	npn,DM,si	100	200	6.7	25	220	4	.005	—	5	(CL, Epitaxial)
HF 37	2N921	GI	npn,DM,si	100	200	6.7	50	200	4	.005	—	4	(CL, Epitaxial)
	2N922	GI	npn,DM,si	100	200	6.7	50	200	4	.005	—	4	(CL, Epitaxial)
	2N929A	SSD	npn,DP,si	*100	200	2.3	45	—	60-350	2na	—	*6	—
	2N930A	SSD	npn,DP,si	*100	200	2.3	45	—	150-600	2na	—	*6	—
	2N979	SPR	ppp,MD,ge	*100	60	0.8	*20	100	50*	18	—	*2.5	—
	2N980	SPR	ppp,MD,ge	*100	60	0.8	*12	100	*70	1	—	*1.5	RF, Mixer, Osc.
HF 38	2N987	AMP	ppp,PADT,ge	100	86	1.33	*40	10	100	—	—	—	—
	2N1180	RCA	ppp,Dr,ge	100	80	—	30	10	80	12	—	—	—
	2N1224	GI	DR,ft	100	85	2	*12	1.5	60	5	—	5	—
	2N1226	GI	DR,ft	100	85	2	*12	1.5	60	5	—	5	—
	2N1225	RCA	ppp,Dr,ge	100	85	—	*40	10	60	12	—	—	AMP
	2N1253	FA	npn,DP,si	100	175	13.3	20	—	45	0.1	—	30	RH, TI
HF 39	2N1396	RCA	ppp,Dr,ge	100	85	—	*40	10	90	16	—	—	AMP
	2N1420	RCA	ppp,Dr,ge	100	175	0.013	30	10	130	0.01	—	—	GI, PSI
	2N1427	GI	ppp,MD,ge	100	60	0.8	*6	10	25	3	—	3.5	—
	2N1499A	GI	MADT	100	60	0.8	*20	40	50	3	—	3	SPR
	2N1613	FA	npn,DP,si	100	3w	17.2	75	—	80	.0004	—	*1.3	RA, GI, TI, MO, GE, PSI
	2N1748	PH	ppp,MD,ge	100	60	.8	*25	50	45	1.5	—	*1.3	—
HF 40	2N1748A	PH	ppp,MD,ge	100	60	0.8	25	50	70	1.5	—	*1.3	—
	2N1749	PH	ppp,MD,ge	100	75	1	*40	10	45	1.5	—	*1.3	—

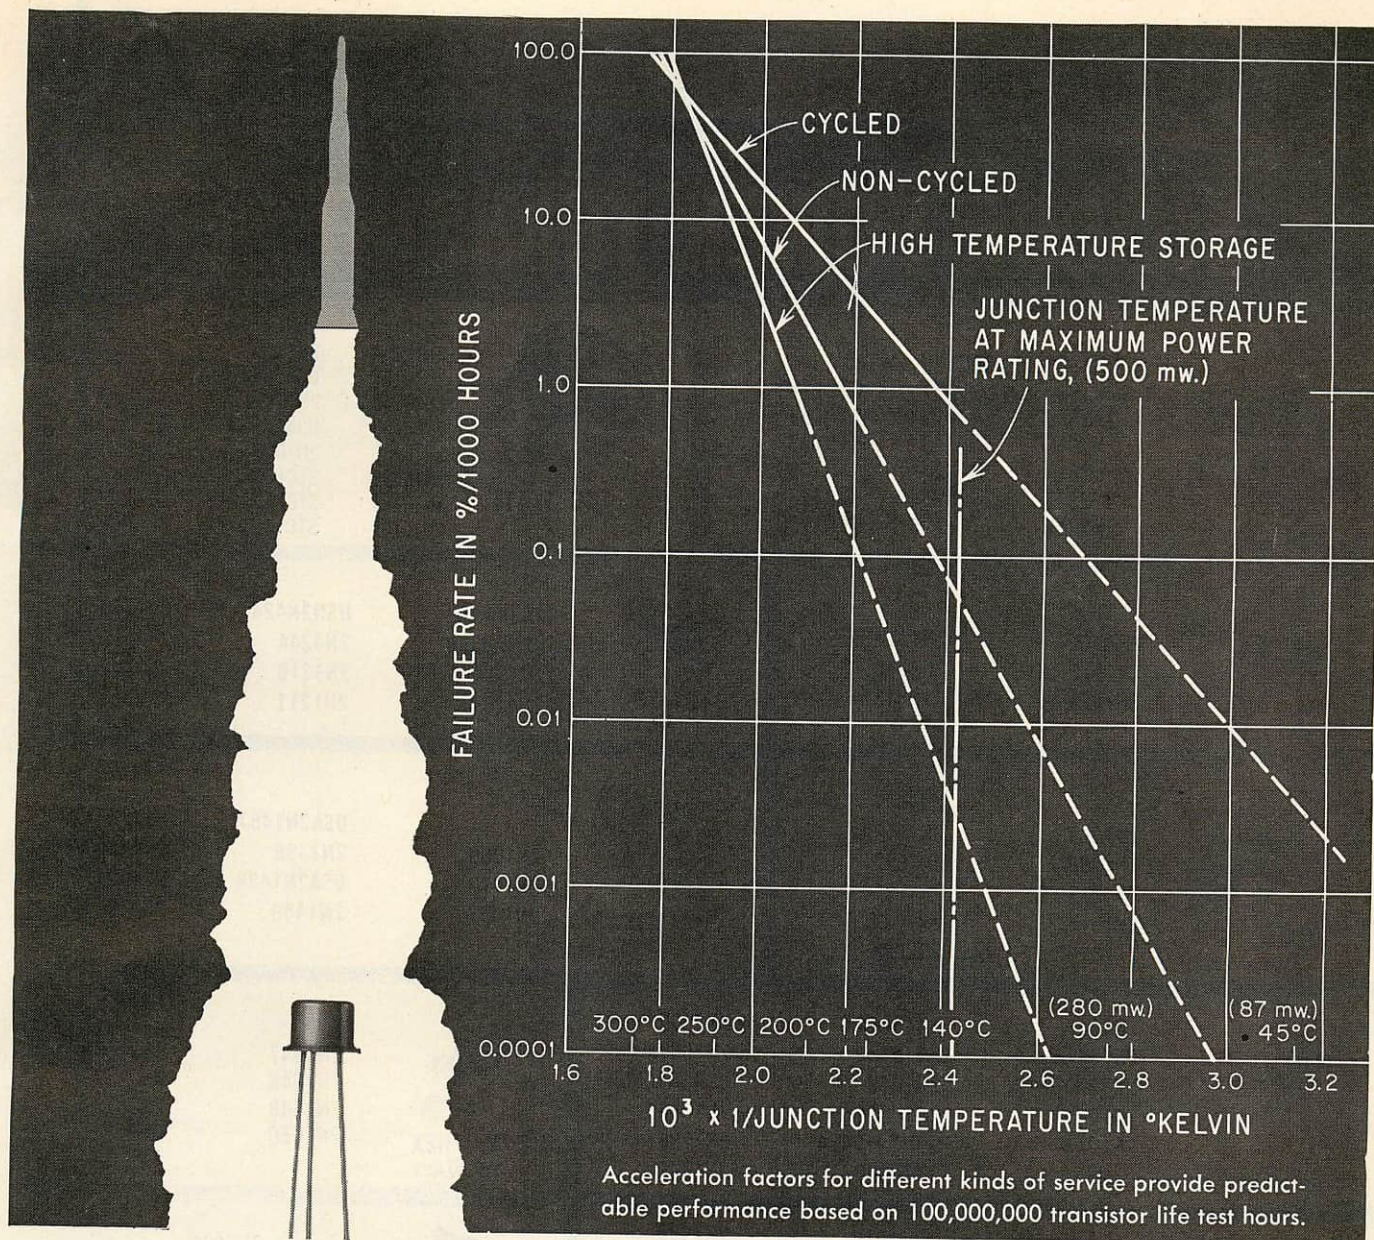

General Electric transistors exceed Minuteman 99.999% reliability objective

General Electric has completed a silicon transistor reliability improvement program for the MINUTEMAN airborne guidance and control system where data on a single product has been accumulated for over 100,000,000 life test hours . . . unsurpassed in the semiconductor industry. The result is reliability without parallel. For instance, final-phase testing of 4,650 G.E. MINUTEMAN transistors to approximately 24,000,000 transistor hours at 288 mw resulted in ZERO failures. The

MINUTEMAN Part transistor made by General Electric substantially exceeds the MINUTEMAN objective of an average failure rate of 0.001%/1000 hours in continuous operation at 87 mw (25°C ambient) (see graph).

You can have this kind of reliability in *your* military and commercial applications. Just check the chart for MINUTEMAN Part Numbers, similar EIA Types, and additional MINUTEMAN Types, all produced simultaneously on the same production lines and under the same exacting conditions.

For complete specifications see your G-E Semiconductor District Sales Manager, or write Section 11E151, Semiconductor Products Department, General Electric Company, Electronics Park, Syracuse, New York. In Canada: Canadian General Electric, 189 Dufferin St., Toronto, Ontario. Export: International General Electric, 159 Madison Ave., New York 16, N.Y.

Transistor Minuteman Part No.	Silicon Transistor Description	Maximum Dissipation	V _{BE}	Nearest EIA Type No.	"Additional Minuteman Types"
551B	Unijunction	600 mw	60	2N489	MM/2N490/M MM/2N491/M MM/2N492/M MM/2N493/M MM/2N494/M
703B	Fixed-Bed Grown-diffused	500 mw	60	2N335A	MM/2N332/M MM/2N333/M MM/2N336/M
801B	Grown-diffused	250 mw	45	2N337	MM/2N338

* Furnished to either A, B or M MINUTEMAN level units.

GENERAL  ELECTRIC



SILICON POWER TRANSISTORS



7/8" HEX
200 WATT

2N1936	2N2820	STC1728
2N1937	2N2821	STC1731
2N2815	2N2822	STC1733
2N2816	2N2823	STC1736
2N2817	2N2824	STC1738
2N2818	2N2825	STC1738
2N2819	STC1726	STC1750



150 WATT

2N1015	USN2N1016B	STC1015C
2N1015A	2N1016C	STC1015D
2N1015B	USN2N1016C	STC1015E
2N1015C	2N1016D	STC1016
2N1015D	USN2N1016D	STC1016A
2N1015E	2N1016E	STC1016B
2N1016	STC1015	STC1016C
2N1016A	STC1015A	STC1016D
2N1016B	STC1015B	STC1016E



TO-36
75 WATT

2N1511	2N1514
2N1512	2N2015
2N1513	2N2016



TO-53
85 WATT

2N389	USN2N424	2N1250
USN2N389	2N424A	2N1620
2N389A	2N1210	2N1722
2N424	2N1211	2N2383



1 1/16" HEX
85 WATT

2N1208	2N1617
2N1209	2N1617A
2N1212	2N1618
2N1616	2N1618A
2N1616A	2N1724
	2N2384



TO-3
75 WATT

2N1069	USA2N1487	USA2N1489
2N1070	2N1488	2N1490
2N1487	USA2N1488	USA2N1490
	2N1489	2N1702



"F"
40 WATT

2N1047	2N1048A	2N1050
2N1047A	2N1048B	2N1050A
USN2N1047A	2N1049	USN2N1050A
2N1047B	2N1049A	2N1050B
2N1048	USN2N1049A	2N1768
USN2N1048A	2N1049B	2N1769



7/16" HEX
40 WATT

2N1647	2N2150
2N1648	2N2151
2N1649	2N2828
2N1650	2N2829




TO-8
25 WATT

2N1067	2N1484	2N1486
2N1068	USA2N1484	USA2N1486
2N1483	2N1485	2N1701
USA2N1483	USA2N1485	2N2035
		2N2308



TO-37
17.5 WATT

2N2036
STC1800
STC1810
STC1850



TO-5
5 WATT

2N497	2N549	2N656	2N116	2N1480	2N1482
2N498	2N550	2N656A	2N1117	USA2N1480	USA2N1482
2N547	2N551	2N657	2N1479	2N1481	2N1700
2N548	2N552	2N657A	USA2N1479	USA2N1481	2N2033
					2N2034



PNP
TO-3
75 WATT

STC5080
STC5081
STC5082
STC5083
STC5084
STC5085



PNP-1 1/16" HEX
85 WATT

STC5580
STC5581
STC5582

STC5583
STC5584
STC5585



PNP
TO-53
85 WATT

2P389
2P389A
2P424
2P424A

SILICON TRANSISTOR CORPORATION

CARLE PLACE, L. I., N.Y.

(516) PIONEER 2-4100

TWX-516-248-9085

ON READER-SERVICE CARD CIRCLE 449

HF continued

Cross Index Key	Type No.	Mfr.	Type	f _{ce} *f _T **f _{db} (mc)	MAX. RATINGS				CHARACTERISTICS					Remarks
					P _c (mw)	T _i (°C)	mW/°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{fe} *h _{FE}	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} (pf)	
HF 36	2N1958A	SYL	npn, P, si	*100	600	175	—	*60	1000	*20-60	0.2	—	*14	RF, Mixer, Osc. on FM rec.
	2N1959A	SYL	npn, P, si	*100	600	175	—	*60	1000	*40-120	0.2	—	*14	
	2N2084	AMP	npn, PAOT, ge	*100	125	90	1.93	*40	10	100	—	—	*12	
	2N2243	TI	npn, PE, si	*100	2800	200	16.0	*80	1000	*40-120	.001	—	*12	
	2N2243A	TI	npn, PE, si	*100	2800	200	16.0	*80	1000	*40-120	.001	—	*12	
	2N2459	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	30-80	2na	—	*5	
HF 37	2N2463	SSD	npn, DP, si	*100	1.8	200	2.8	60	—	30-80	2na	—	*5	
	2N2515	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	40-100	5na	—	*6	
	2N2516	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	80-200	5na	—	*6	
	2N2518	SSD	npn, DP, si	*100	4.0	200	2.3	80	—	40-100	5na	—	*6	
	2N2519	SSD	npn, DP, si	*100	4.0	200	2.3	80	—	80-200	5na	—	*6	
	2N2520	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	18-90	5na	—	*6	
HF 38	2N2521	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	36-90	5na	—	*6	
	2N2522	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	76-333	5na	—	*6	
	2N2523	SSD	npn, DP, si	*100	4.0	200	2.3	45	—	60-350	2na	4	*6	
	2N2524	SSD	npn, DP, si	*100	4.0	200	2.3	45	—	150-600	2na	3	*6	
	2N2601	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	18-90	25na	—	*6	
	2N2602	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	36-90	25na	—	*6	
HF 39	2N2603	SSD	npn, DP, si	*100	4.0	200	2.3	60	—	76-333	25na	—	*6	
	2N2604	SSD	npn, DP, si	*100	4.0	200	2.3	45	—	60-350	10na	4	*6	
	2N2605	SSD	npn, DP, si	*100	4.0	200	2.3	45	—	150-600	10na	3	*6	
	2N2800	MO	npn, PE, si	*100	800	200	4.57	*50	—	*30/90	0.1	—	*25	
	2N2801	MO	npn, PE, si	*100	800	200	4.57	*50	—	*75/225	0.1	—	*25	
	3N34	TI	npn, GD, si	100	125	150	1	30	20	4	0.4	20	—	
HF 40	OC171	AMP	npn, DJ, ge	100	60	75	2	*20	5	—	2	—	—	
	2N1752	PH	npn, MD, ge	106	60	100	0.8	*12	50	250	0.8	—	*1	
	2N1753	SSD	npn, DP, si	*110	4.0	200	2.3	60	—	150-275	25na	—	*5	
	2N1947	RA	npn, MS, si	120	4w	175	26.5	60	500	25	0.1	—	20	
	2N1948	RA	npn, MS, si	120	4w	175	26.5	100	500	25	0.1	—	20	
	2N655	RA	npn, MS, si	120	4w	175	26.5	60	500	60	0.1	—	20	
HF 41	2N657	RA	npn, MS, si	120	4w	175	26.5	100	500	60	0.1	—	20	
	2N1023	RCA	npn, Dr, ge	120	120	85	—	40	10	60	12	—	—	
	2N1066	RCA	npn, Dr, ge	120	120	85	—	40	10	60	12	—	—	
	2N1397	RCA	npn, Dr, ge	120	120	85	—	40	10	60	16	—	—	
	2N1409	RA	npn, MS, si	120	2.8w	150	22.5	30	500	30	0.1	—	20	
	2N1410	RA	npn, MS, si	120	2.8w	150	22.5	30	500	50	0.1	—	20	
HF 42	2N1420	RA	npn, DP, si	*120	2w	175	13.2	*60	500	200	.003	—	20	
	2N2450	SSD	npn, DP, si	*120	4.0	200	2.3	60	—	50-130	2na	—	*5	
	2N2464	SSD	npn, DP, si	*120	1.8	200	2.8	60	—	50-130	2na	—	*5	
	2N2798	SPR	npn, ED, ge	*120	75	100	1.0	*25	100	*30	3	—	*4	
	PT600	PSI	npn, DM, si	120	13w	175	86.7	60	—	12	1	—	40	
	P1601	PSI	npn, DM, si	120	13w	175	86.7	60	—	14	1	—	40	
HF 43	2N1715	TI	npn, MS, si	125	1.2w	175	8	*50	—	1	.001	—	3	
	2N1716	TI	npn, MS, si	125	1.2w	175	8	*70	—	1	.001	—	3	
	2N1507	RA	npn, DD, si	120	2w	175	13.2	60	500	200	0.003	—	20	
	2N1785	PH	npn, MD, ge	125	45	85	0.75	*10	50	150	2	—	*1.5	
	2N1786	PH	npn, MD, ge	125	45	85	0.75	*10	50	250	2	—	*1.7	
	2N1787	PH	npn, MD, ge	125	45	85	0.75	*15	50	120	1.5	—	*1.5	
HF 44	2N1864	PH	npn, MD, ge	125	60	100	.8	*20	50	60	1.5	—	*1.6	
	2N2188	TI	npn, AD, ge	*125	125	—	—	40	30	90	3	—	—	
	2N2190	TI	npn, AD, ge	*125	125	—	—	60	30	90	3	—	—	
	2N1748A	PH	npn, MD, ge	*132	60	100	0.8	*25	50	70	1.5	—	*1.3	
	2N929	GI	npn, PL, si	*140	1.8w	175	3.33	45	—	40-120	3na	—	*5	
	2N930	GI	npn, PL, si	*140	1.8w	175	3.33	45	—	100-300	3na	—	*5	
HF 45	2N1177	RCA	npn, Dr, ge	140	80	71	—	30	10	100	12	—	—	
	2N1178	RCA	npn, Dr, ge	140	80	71	—	30	10	40	12	—	—	
	2N1179	RCA	npn, Dr, ge	140	80	71	—	30	10	80	12	—	—	
	2N2451	SSD	npn, DP, si	*140	4.0	200	2.3	60	—	100-180	2na	—	*5	
	2N2455	SSD	npn, DP, si	*140	1.8	200	2.8	60	—	100-180	2na	—	*5	
	3N35	TI	npn, GD, si	150	125	150	1	30	20	4	0.4	14	—	
HF 46	2N728	TR	npn, JD, si	150	300	175	—	15	25	20	2.5	—	8	
	2N729	TR	npn, DJ, si	150	300	175	—	30	25	20	2.5	—	8	
	2N1276	PH	npn, MD, ge	150	60	100	0.8	*20	50	150	1.5	—	*1.5	
	2N1277	PH	npn, MD, ge	150	60	100	0.8	*20	50	200	1.5	—	*1.5	
	2N1278	PH	npn, MD, ge	150	60	100	0.8	*20	50	120	1.5	—	*1.5	
	2N1788	PH	npn, MD, ge	150	60	100	0.8	*35	50	150	1.5	—	*1.5	
HF 47	2N1789	PH	npn, MD, ge	150	60	100	0.8	*35	50	200	1.5	—	*1.5	
	2N1790	PH	npn, MD, ge	150	60	100	0.8	*35	50	120	1.5	—	*1.5	
	2N2189	TI	npn, AD, ge	*150	125	—	—	40	30	135	3	—	—	
	2N2191	TI	npn, AD, ge	*150	125	—	—	60	30	135	3	—	—	
	2N2192	TI	npn, AD, ge	*150	125	—	—	60	30	135	3	—	—	
	2N2193	TI	npn, AD, ge	*150	125	—	—	60	30	135	3	—	—	

*The high-voltage barrier to passivated PNP transistors has finally been broken
—but it took a new manufacturing process to overcome the obstacles.*

Now from MOTOROLA

Epitaxial, Passivated PNP SILICON TRANSISTORS


Made by the Annular* Process

Some new words are being added to the dictionary of semiconductor terms—words like Annular* and Band-Guard†, words that relate to a new manufacturing process which will have a strong influence on transistor design and promises to open new areas for transistor applications. The Annular manufacturing process provides a new degree of freedom from surface effects for semiconductor products.

For years, the industry had been working to design high voltage silicon PNP transistors with the low leakage currents normally associated with NPN types, surface passivated by the planar process. For PNP devices, planar techniques proved inadequate since any attempt to increase voltage ratings beyond approximately 20 volts (through increasing collector material resistivity) induced a phenomenon, called channeling, which actually increased leakage current far beyond tolerable levels.

Channeling is a condition whereby the surface portion of a transistor collector region actually changes polarity and becomes an extension of the base region. The base-collector junction, therefore, rather than coming to the top surface where it is protected from the environment by a silicon oxide coating, extends to the unprotected edges of the transistor where it is subject to contamination and surface damage. This phenomenon circumvents the passivation advantages of planar designs and results in excessive leakage currents.


The formation of channels has been traced to effects of ionized or polarized particles on or within the passivating oxide coating which create an electrical environment that tends to alter the apparent polarity of the material directly

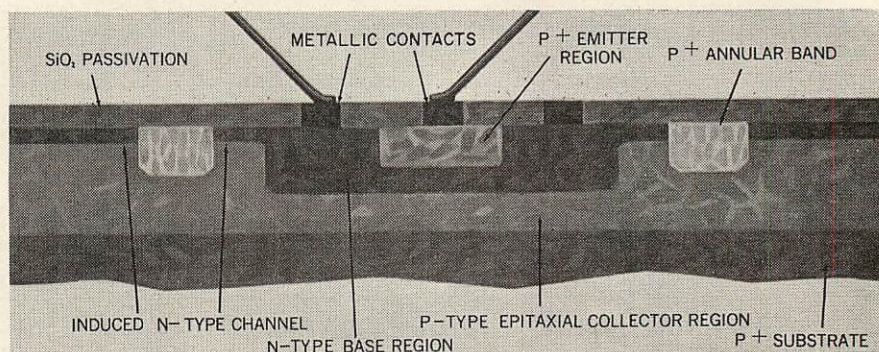

Cross Section of Annular Transistor

beneath the oxide—an effect which is particularly pronounced in lightly doped P-type material. The channels are random in nature and erratic in characteristics, and can be highly sensitive to radiation bombardment.

As a result of channeling, some manufacturers have reverted to earlier silicon mesa structures or have deliberately circumvented the oxide passivation in planar transistors in order to produce high voltage devices. These methods have yielded high voltage ratings but other characteristics of the resulting transistors do not compare favorably with those of surface passivated devices.

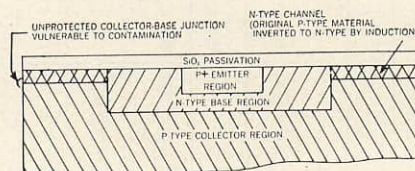

Cross Section of Planar Transistor

Now, Motorola has overcome these obstacles—but it has taken a new manufacturing process to do so. Rather than trying to eliminate the channel, Motorola, in a new series of “Band-Guard” transistors, has deliberately introduced a channel whose controlled characteristics completely overshadow the variable effects of any randomly induced channel, thus providing a high

degree of performance stability. Moreover the controlled channel is terminated close to the base region by a diffused annular band of the same polarity as the collector region but with a resistivity level impervious to channeling. The collector-base junction, therefore, is properly terminated underneath the oxide coating where it is protected against environmentally induced leakage currents. The resultant “Band-Guard” PNP silicon devices, for the first time, combine the low-leakage characteristics of passivated junctions with the high-voltage characteristics of non-passivated, or mesa structures.

And, if theoretical analysis of this process is confirmed by tests now in progress, they will prove to be more resistant to radiation, thus heralding improved performance and greater reliability of space equipment.

Though initially devised for the production of high voltage silicon PNP transistors, there are strong indications that the Annular process yields major benefits for NPN and field effect transistors and other semiconductor devices as well.

In view of these considerations, there is little doubt that the new, Motorola developed Annular process will take its place among the major milestones in the advancement of the semiconductor art.

*Patents Pending

†Trademark of Motorola Inc.

NOW FROM MOTOROLA

EPITAXIAL PASSIVATED

PNP SILICON TRANSISTORS

... made by the new ANNULAR PROCESS

Four new Motorola PNP silicon transistors made by the Annular process and featuring high speed . . . high voltage . . . low leakage . . . and surface passivation and stability, are now immediately available as types 2N2800, 2N2801, 2N2837, and 2N2838. Called "Band-Guard" transistors, the new devices reflect performance advantages inherent in an Annular, oxide-passivated, epitaxially fabricated transistor.

Annular Process — Provides a new degree of freedom from surface effects of adverse environments. Gives a new degree of performance stability by eliminating sub-surface leakage paths to the unprotected edges of the device. Makes possible combined high voltage *and* true silicon oxide passivation.

Oxide Surface Passivation — Prevents contamination of the junction by external agents. Makes possible the low collector leakage current (1/10th that of other PNP units) of Motorola's "Band-Guard" transistors.

Epitaxial Structure — Gives lower saturation voltage ($\frac{1}{2}$ lower) and twice the frequency response (120 mc) of ordinary PNP devices.

Other types supplied as "Band-Guard" units include 2N1132, 2N1132A, 2N1132B, and 2N722.

Motorola passivated, epitaxial "Band-Guard" transistors are immediately available from your Motorola Semiconductor Distributor or District Office. For full electrical specifications write: Technical Information Center, Motorola Semiconductor Products, Inc., Box 955, Phoenix 1, Arizona.

"Band-Guard" Transistor Performance Ratings

Characteristic	2N2800 (TO-5 pkg)	2N2801 (TO-5 pkg)	2N2837 (TO-18 pkg)	2N2838 (TO-18 pkg)	Unit
Collector-Base Breakdown Voltage ($I_c = 10 \mu\text{Adc}$, $I_E = 0$)	50	50	50	50	Vdc
Collector-Emitter Breakdown Voltage ($I_c = 100 \text{ mAdc}$, $I_E = 0$)	35	35	35	35	Vdc
Collector Cutoff Current ($V_{CE} = 25 \text{ Vdc}$, $V_{BE} = 0.5 \text{ Vdc}$)	100	100	100	100	nAdc
DC Forward Current Transfer Ratio ($I_c = 150 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$) *	30-90	75-225	30-90	75-225	—
Current-Gain — Bandwidth Product ($I_c = 50 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 100 \text{ mc}$)	120	120	120	120	mc

*Pulse Test: Pulse Width $\leq 300 \mu\text{sec}$, duty cycle $\leq 2\%$

... also supplied as "Band-Guard" types:

Characteristic	2N1132 (TO-5 pkg)	2N1132A (TO-5 pkg)	2N1132B (TO-5 pkg)	2N722 (TO-18 pkg)	Unit
Collector-Base Breakdown Voltage ($I_c = 100 \mu\text{Adc}$, $I_E = 0$)	50	60	70	50	Vdc
Collector-Emitter Breakdown Voltage ($I_c = 100 \text{ mAdc}$ pulsed)	35	40	45	35	Vdc
Collector Cutoff Current ($V_{CE} = 30 \text{ Vdc}$, $I_E = 0$) ($V_{BE} = 50 \text{ Vdc}$, $I_E = 0$)	1.0 —	— .5	— .01	1.0 —	μAdc
DC Forward Current Transfer Ratio ($I_c = 150 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$)	30-90	30-90	30-90	30-90	—
Current-Gain — Bandwidth Product ($I_c = 50 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$, $f = 20 \text{ mc}$)	60	60	60	60	mc



"new leader in Total Silicon Technology"

MOTOROLA Semiconductor Products Inc.

BOX 955 • PHOENIX 1, ARIZONA • A SUBSIDIARY OF MOTOROLA INC.

HF continued

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T +f _{ab} (mc)	MAX. RATINGS			CHARACTERISTICS					Remarks	
					P _c (mw)	T _i (°C)	mW/°C	V _{CEO} -V _{CBO} (v)	I _C (ma)	h _{FE} -h _{FE}	I _{CO} (μa)	NF (db)		C _{oe} *C _{ob} (pf)
HF 43	2N2654	AMP	pn-p, AD, ge	150	100	75	0.50	*25	10	65	—	18.8	—	
	2N2797	SPR	pn-p, ED, ge	*150	75	100°C	1.0	*20	100	*50	2	—	*3.5	
	2N1499A	PH	pn-p, MD, ge	*160	60	100	0.8	*20	100	*70	0.6	—	*1.5	
	2N2462	SSD	npn, DP, si	*160	4.0	200	2.3	60	—	150-230	2na	—	*5	
	2N2466	SSD	npn, DP, si	*160	1.8	200	2.8	60	—	150-230	2na	—	*5	
	2N1500	PH	pn-p, MD, ge	*175	60	100	0.8	*15	50	*70	1	—	*1.5	
HF 44	2N1500	GI	MADT	175	60	100	0.8	*0.5	10	70	5	—	3	
	2N1746	PH	pn-p, MD, ge	175	60	100	0.8	*20	50	70	1	—	*1.2	
	2N2207	AMP	pn-p, AD, ge	175	260	75	0.25	*70	50	200	—	—	—	
	2N2512	AMP	pn-p, AD, ge	175	260	75	0.25	*70	50	200	—	—	—	
	2N1840	PSI	npn, TDP, si	180	2	175	.013	25	500	15	.3	—	—	
	2N2494	AMP	pn-p, AD, ge	180	100	85	1.67	*20	10	60	2.0	6	—	
HF 45	2N2495	AMP	pn-p, AD, ge	180	100	85	1.67	*20	10	60	2.0	6	—	
	2N2496	AMP	pn-p, AD, ge	180	100	85	1.67	*20	10	60	2.0	6	—	
	PT886	PSI	npn, TDP, si	180	1.5	175	.01	22	—	—	.3	—	—	
	PT887	PSI	npn, TDP, si	180	1.6	175	.01	45	—	—	.3	—	—	
	PT888	PSI	npn, TDP, si	180	1.6	175	.01	45	—	—	.3	—	—	
	2N1566	PSI	npn, TDP, si	190	3	200	.02	80	50	130	.01	—	—	
HF 46	2N1889	PSI	npn, TDP, si	190	3	200	.017	100	—	80	.001	—	—	
	2N1890	PSI	npn, TDP, si	190	3	200	.017	100	—	200	.001	—	—	
	2N1342	PSI	npn, TDP, si	190	2.8	175	.018	150	300	12	.01	—	—	
	2N1506A	PSI	npn, TDP, si	190	3.5	200	.02	80	500	60	.005	—	—	
	2N1564	PSI	npn, TDP, si	190	3	175	.02	80	50	30	.01	—	—	
	2N1565	PSI	npn, TDP, si	190	3	175	.02	80	50	60	.01	—	—	
HF 47	2N1893	PSI	npn, TDP, si	190	3	200	.017	140	500	90	.001	—	—	High freq., high power
	2N1893A	PSI	npn, TDP, si	190	3	200	.017	140	500	90	.001	—	—	
	2N1957	FA	npn, DD, si	*200	800	150	6.5	20	—	*60	—	—	*7.5	
	2N1995	FA	npn, DP, si	*200	1200	200	6.9	12	—	*75	0.0002	—	*7.5	
	2N1996	FA	npn, DP, si	*200	1200	200	6.9	12	—	*75	0.0002	—	5	
	2N2318	GI	npn, si	200	360	200	2.1	*1	20	60	0.05	—	—	
HF 48	2N2319	GI	npn, si	200	300	200	1.7	*1	20	60	0.05	—	5	
	2N2320	GI	npn, si	200	600	200	3.4	60	0.001	20-60	1	—	5	
	2N2403	NA	npn, si	200	8000	200	45.2	60	0.001	40-120	1	—	25	
	2N2404	NA	npn, si	200	8000	200	45.2	60	0.001	40-120	1	—	25	
	2N2618	SVL	npn, MESA, si	*200	600	250	—	*60	750	*25	0.25	—	*14	
	2N2618/46	SVL	npn, MESA, si	*200	400	250	—	*60	750	*25	0.25	—	*14	
HF 49	MM759	MO	npn, PE, si	*200	20w	175	133	*60	—	*10	0.5	—	—	RF amp SPR, GI TI
	MM800	MO	npn, PE, si	*200	23w	175	167	*60	—	*10	0.5	—	—	
	MM801	MO	npn, PE, si	*200	4w	175	26.7	*60	—	*10	0.5	—	—	
	2N1506	PSI	npn, MS, si	210	3w	175	0.2	60	9	—	—	—	8	
	2N2781	PSI	npn, TDP, si	210	13	175	.087	75	2a	30	.5	—	—	
	2N2782	PSI	npn, TDP, si	210	13	175	.087	100	2a	30	.5	—	—	
HF 48	2N2783	PSI	npn, TDP, si	210	13	175	.087	75	2a	30	.5	—	—	Hi freq., hi power Hi freq., hi power Hi freq., hi power Hi freq., hi power
	PT531	PSI	npn, TDP, si	210	13	175	.087	75	2a	30	.5	—	—	
	PT612	PSI	npn, TDP, si	210	13	175	.087	75	2a	30	.5	—	—	
	PT1558	PSI	npn, TDP, si	210	4	200	.023	80	—	40	.005	—	—	
	PADT78	AMP	pn-p, PADT, ge	*220	100	—	1.7	*35	10	120	2	—	3	
	2N1746	PH	pn-p, MD, ge	235	60	100	0.8	*15	50	—	1.8	—	—	
HF 48	2N588	PH	pn-p, MD, ge	250	30	85	0.75	*15	50	—	2	—	—	Hi freq., hi power Hi freq., hi power Hi freq., hi power Hi freq., hi power
	2N710	MO	pn-p, MS, ge	250	300	100	4	*15	50	40	.2	—	—	
	2N957	PSI	npn, TDP, si	250	.8	150	.006	40	—	*45	.01	—	—	
	2N988	PSI	npn, TDP, si	250	1	175	.006	20	—	70	.05	—	—	
	2N989	PSI	npn, TDP, si	250	1	175	.006	20	—	70	.05	—	—	
	2N1491	RCA	npn, MS, si	250	3w	175	20	30	50	50	10	—	11	
HF 48	2N1837	PSI	npn, DM, si	250	2w	175	13.3	80	—	9	.001	—	9	
	2N1837A	PSI	npn, DM, si	250	2.8w	175	18.6	80	—	9	.001	—	11	
	2N1838	PSI	npn, DM, si	250	2w	175	13.3	45	—	9	0.1	—	9	
	2N1839	PSI	npn, DM, si	250	2w	175	13.3	45	—	9	0.1	—	9	
	2N2485	CS	npn, MS, si	*250	8.7w	200	50	120	1a	*10	500	—	*8	
	2N2486	CS	npn, MS, si	*250	8.7w	200	50	140	1a	*10	500	—	*8	
HF 49	2N2649	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	SPR SPR
	2N2650	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
	2N2656	PSI	npn, TDP, si	250	1.2	200	.006	*15	200	50	.01	—	*4	
	2N2799	SPR	pn-p, ED, ge	*250	75	100	1.0	25	100	80	3	—	—	
	PT720	PSI	npn, TDP, si	250	1.2	200	.006	25	200	80	5	—	—	
	2N2649	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
HF 49	2N2650	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	SPR SPR
	2N2656	PSI	npn, TDP, si	250	1.2	200	.006	*15	200	50	.01	—	*4	
	2N2799	SPR	pn-p, ED, ge	*250	75	100	1.0	25	100	80	3	—	—	
	PT720	PSI	npn, TDP, si	250	1.2	200	.006	25	200	80	5	—	—	
	2N2649	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
	2N2650	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
HF 49	2N2656	PSI	npn, TDP, si	250	1.2	200	.006	*15	200	50	.01	—	*4	SPR SPR
	2N2799	SPR	pn-p, ED, ge	*250	75	100	1.0	25	100	80	3	—	—	
	PT720	PSI	npn, TDP, si	250	1.2	200	.006	25	200	80	5	—	—	
	2N2649	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
	2N2650	CS	npn, MS, si	*250	8.7w	200	50	65	1a	*10	500	—	*8	
	2N2656	PSI	npn, TDP, si	250	1.2	200	.006	*15	200	50	.01	—	*4	


HF continued

Cross Index Key	Type No.	Mfr.	Type	MAX. RATINGS					CHARACTERISTICS					Remarks
				f_{ae} * f_T * f_{db} (mc)	P_c (mw)	T_j (°C)	mW/°C	V_{CEO} * V_{CBO} (v)	I_C (ma)	h_{FE} * h_{FE}	I_{CO} (μ a)	NF (db)	C_{oe} * C_{ob} (pf)	
HF 50	2N2635	TI	pn-p, EM, ge	*295	300	100	4.0	*30	100	100	1	—	*3.5	GE
	2N695	MO	pn-p, DM, ge	300	75	100	1	15	50	40	0.2	—	3.5	CL
	2N707	PSI	npn, TDP, si	300	1	175	.006	56	—	12	.005	—	—	CL
	2N834	GI	npn, si	300	360	200	2.1	*40	10	40	0.5	—	4	CL
	2N835	GI	npn, si	300	360	200	2.1	*25	10	30	0.5	—	4	CL
HF 51	2N916	PSI	npn, TDP, si	300	1.2	200	.006	45	—	120	.001	—	—	—
	2N960	TI	pn-p, EM, ge	*300	150	—	—	15	150	*20	3	—	*4	—
	2N961	TI	pn-p, EM, ge	*300	150	—	—	12	150	*20	3	—	*4	—
	2N962	TI	pn-p, EM, ge	*300	150	—	—	12	150	*20	3	—	*4	—
	2N964	TI	pn-p, EM, ge	*300	150	—	—	15	150	*40	3	—	*4	—
HF 52	2N965	TI	pn-p, EM, ge	*300	150	—	—	12	150	*40	3	—	*4	—
	2N966	TI	pn-p, EM, ge	*300	150	—	—	12	150	*40	3	—	*4	—
	2N985	TI	pn-p, EM, ge	*300	150	—	—	15	200	*60	3	—	*6	—
	2N1493	RCA	npn, MS, si	300	3w	175	20	100	50	10	—	—	6	—
	2N2242	GI	npn, si	300	360	200	2.1	*40	10	80	0.1	—	—	—
HF 53	2N2381	MO	pn-p, EM, ge	*300	750	100	10	*30	500	*25	1	—	*3.5	—
	2N2382	MO	pn-p, EM, ge	*300	750	100	10	*45	500	*25	1	—	*3.5	—
	2N2795	SPR	pn-p, ED, ge	*300	75	100°C	1.0	*15	100	*50	3	—	*3	—
	2N2796	SPR	pn-p, ED, ge	*300	75	100°C	1.0	*12	100	*30	3	—	*4	—
	2N503	PH	pn-p, MD, ge	320	25	85	0.5	*20	50	4.2	3	—	*1.0	SPR
HF 54	2N703	SYL	npn, P, si	*320	300	200	—	*25	200	*40-100	—	—	*6	—
	2N706	SYL	npn, P, si	*320	300	200	—	*25	200	*20	.5	—	—	—
	2N706A	SYL	npn, P, si	*320	300	200	—	*25	200	*20-60	.5	—	*5	—
	2N706B	SYL	npn, P, si	*320	300	200	—	*25	200	*20-60	.5	—	*5	—
	2N968	MO	pn-p, DM, ge	*320	300	100	4	*15	—	35	3	—	4.0	RA
HF 55	2N969	MO	pn-p, DM, ge	*320	300	100	4	*12	—	35	3	—	4.0	RA
	2N970	MO	pn-p, DM, ge	*320	300	100	4	*12	—	35	3	—	4.0	RA
	2N971	MO	pn-p, DM, ge	*320	300	100	4	*7	—	35	10	—	4.0	RA
	2N972	MO	pn-p, DM, ge	*320	300	100	4	*15	—	75	3	—	4.0	RA
	2N973	MO	pn-p, DM, ge	*320	300	100	4	*12	—	75	3	4.0	—	RA
HF 56	2N974	MO	pn-p, DM, ge	*320	300	100	4	*12	—	75	3	4.0	—	RA
	2N975	MO	npn, DM, ge	*320	300	100	4	*7	—	75	10	4.0	—	RA
	2N2256	MO	npn, ME, si	*320	1000	175	6.67	*7	100	30	3	4	—	CL
	2N2257	MO	npn, ME, si	*320	1000	175	6.67	*7	100	30	3	4	—	CL
	2N2258	MO	pn-p, ME, ge	*320	300	100	4	*7	100	30	3	4	—	Epitaxial
HF 57	2N2259	MO	pn-p, ME, ge	*320	300	100	4	*7	100	30	3	4	—	Epitaxial
	2N499	PH	pn-p, MD, ge	340	30	85	9.75	30	50	8.5	1.0	—	1.3	GI, SPR
	2N743	SYL	npn, P, si	*350	300	200	—	*20	—	*20-60	1.0	—	*5	—
	2N743/46	SYL	npn, P, si	*350	400	200	—	*20	—	*20-60	1.0	—	*5	—
	2N743/51	SYL	npn, P, si	*350	300	200	—	*20	—	*20-60	1.0	—	*5	—
HF 58	2N744	SYL	npn, P, si	*350	300	200	—	*20	—	*40-120	1.0	—	*5	—
	2N744/46	SYL	npn, P, si	*350	400	200	—	*20	—	*40-120	1.0	—	*5	—
	2N744/51	SYL	npn, P, si	*350	300	200	—	*20	—	*40-120	1.0	—	*5	—
	2N784A	SYL	npn, P, si	*350	400	200	—	*40	200	*25-150	.025	—	*3.5	—
	2N784A/46	SYL	npn, P, si	*350	400	200	—	*40	200	*25-150	.025	—	*3.5	—
HF 59	2N784A/51	SYL	npn, P, si	*350	300	200	—	*40	200	*25-150	.025	—	*3.5	—
	2N914	FA	npn, DP, si	*350	1200	200	6.9	*15	—	55*	0.004	—	4.5	CL, MO
	2N915	FA	npn, DP, si	*350	1200	200	6.9	50	—	*100	0.005	—	*3.0	—
	2N984	SPR	pn-p, MD, ge	*350	60	100	0.8	10	100	*50	5.0	—	*2.5	—
	2N1962	SPR	npn, P, si	*350	400	200	—	*40	200	*20-80	0.25	—	*3.5	—
HF 60	2N2170	SPR	pn-p, MD, ge	*350	60	100	0.8	10	100	*50	5.0	—	*3.0	—
	2N2397	SYL	npn, P, si	*350	300	200	—	*25	200	*25-125	0.10	—	*5	—
	2N2787	GI	npn, P, si	*350	3w	175	5.33	35	—	20-60	2na	—	*5	—
	2N2788	GI	npn, P, si	*350	3w	175	5.33	35	—	40-120	2na	—	*5	—
	2N2789	GI	npn, P, si	*350	3w	175	5.33	35	—	100-300	2na	—	*5	—
HF 61	2N2790	GI	npn, P, si	*350	1.8w	175	3.33	35	—	20-60	2na	—	*5	—
	2N2791	GI	npn, P, si	*350	1.8w	175	3.33	35	—	40-120	2na	—	*5	—
	2N2792	GI	npn, P, si	*350	1.8w	175	3.33	35	—	100-300	2na	—	*5	—
	2N741	MO	pn-p, MS, ge	360	300	100	4	*15	100	25	.2	7	*6	Amp VHF
	2N741A	MO	pn-p, MS, ge	360	300	100	4	*20	100	25	.2	7	*6	—
2N1407	TI	pn-p, MS, ge	375	75	100	1	30	50	6	.2	7	—	—	

HF *continued*

Cross Index Key	Type No.	Mfr.	Type /	f _{ae} *f _T *+f _{ab} (mc)	MAX. RATINGS			CHARACTERISTICS						Remarks
					P _c (mw)	T _j (°C)	m _w /°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{FE} *h _{FE}	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} (pf)	
HF 57	2N708	SYL	npn, P, si	*400	300	200	—	*40	—	*30-120	.025	—	*6	Pl. Epitaxial Pl. Epitaxial
	2N708/46	SYL	npn, P, si	*400	400	200	—	*40	—	*30-120	.025	—	*6	
	2N708/51	SYL	npn, P, si	*400	300	200	—	*40	—	*30-120	.025	—	*6	
	2N743	TI	npn, P, E, si	*400	1000	175	6.67	*25	200	*20-60	.002	—	*3.5	
	2N828A	MO	pnnp, DJEM, ge	*400	300	100	4	*15	200	*40	3	—	*2.2	
	2N829	MO	pnnp, DJEM, ge	*400	300	100	4	*15	200	*80	3	—	*2.2	
HF 58	2N916	FA	npn, DP, si	*400	1200	200	6.9	25	—	*80	0.002	—	*4.0	Pl. Epitaxial Pl. Epitaxial
	2N947	FA	npn, DP, si	*400	1200	200	6.9	—	—	*80	0.005	—	—	
	2N2217	MO	npn, DD, si	*400	3	175	5.33	*60	—	20-60	0.01	—	—	
	2N2218	MO	npn, DD, si	*400	3	175	5.33	*60	—	40-120	0.01	—	—	
	2N2219	MO	npn, DD, si	*400	3	175	5.33	*60	—	100-300	0.01	—	—	
	2N2220	MO	npn, DD, si	*400	1.8	175	3.33	*60	—	20-60	0.01	—	—	
HF 59	2N2221	MO	npn, DD, si	*400	1.8	175	3.33	*60	—	40-120	0.01	—	—	CL Epitaxial
	2N2222	MO	npn, DD, si	*400	1.8	175	3.33	*60	—	100-300	0.01	—	8	
	2N2537	MO	pnnp, P, E, si	*400	800	200	4.57	*60	—	*50/150	0.25	—	—	
	2N2538	MO	npn, P, E, si	*400	800	200	4.57	*60	—	*100/300	0.25	—	*8	
	2N2539	MO	npn, P, E, si	*400	500	200	2.86	*60	—	*50/150	0.25	—	*8	
	2N2540	MO	npn, P, E, si	*400	500	200	2.86	*60	—	*100/300	0.25	—	—	
HF 60	MM719	MO	npn, P, E, si	*400	3w	200	17.1	*60	—	*40	0.5	—	—	Epitaxial
	2N835	SYL	npn, P, si	*425	300	200	—	*25	200	—	—	—	—	
	2N835/46	SYL	npn, P, si	*425	400	200	—	*25	200	—	—	—	—	
	2N835/51	SYL	npn, P, si	*425	300	200	6.9	15	—	*50	0.004	—	*5.0	
	2N708	FA	npn, DP, si	*450	1200	200	6.67	*25	200	*40-120	.002	—	*3.5	
	2N744	TI	npn, P, E, si	*450	1000	175	6.67	*40	200	*25	0.5	—	*4	
HF 61	2N834	SYL	npn, P, si	*450	300	200	—	*40	200	*25	0.5	—	*4	Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA PG-22db @ 200mc, MO High freq., high power High freq., high power
	2N834/46	SYL	npn, P, si	*450	400	200	—	*40	200	*25	0.5	—	*4	
	2N834/51	SYL	npn, P, si	*450	300	200	—	*40	200	*25	0.5	—	*4	
	2N835	MO	npn, P, si	*450	300	200	2	*25	200	*30-120	.025	—	*6	
	2N914	SYL	npn, P, si	*450	300	200	—	*40	—	*30-120	.025	—	—	
	2N914/46	SYL	npn, P, si	*450	400	200	—	*40	—	*30-120	.025	—	—	
HF 62	2N914/51	SYL	npn, P, si	*450	300	200	—	*40	—	*30-120	.025	—	*6	UHF Amp. MIL PG-26db @ 200mc, MO
	2N982	SPR	pnnp, MD, ge	*450	60	100	0.8	15	100	*70	3.0	—	*2.5	
	2N983	SPR	pnnp, MD, ge	*450	60	100	0.8	15	100	*65	3.0	—	*2.5	
	2N1405	TI	pnnp, MS, ge	450	75	100	1	30	50	8	2	5	—	
	2N1406	TI	pnnp, MS, ge	450	75	100	1	30	50	8	2	6	—	
	2N2168	SPR	pnnp, MD, ge	*450	60	100	0.8	15	100	*70	3.0	—	*2.5	
HF 63	2N2169	SPR	pnnp, MD, ge	*450	60	100	0.8	15	100	*65	3.0	—	*2.5	Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA PG-22db @ 200mc, MO High freq., high power High freq., high power
	2N960	MO	pnnp, DM, ge	*460	300	100	4	*15	100	*40	0.4	—	2.2	
	2N961	MO	pnnp, DM, ge	*460	300	100	4	*12	100	*40	0.4	—	2.2	
	2N962	MO	pnnp, DM, ge	*460	300	100	4	*12	100	*40	0.4	—	2.2	
	2N963	MO	npn, DM, ge	*460	300	100	4	*12	100	40	5	—	2.2	
	2N964	MO	npn, DM, ge	*460	300	100	4	*15	100	70	0.4	—	2.2	
HF 64	2N964A	MO	npn, DM, ge	*460	300	100	4	*15	100	80	0.4	—	2.2	Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA Epitaxial, RA PG-22db @ 200mc, MO High freq., high power High freq., high power
	2N965	MO	npn, DM, ge	*460	300	100	4	*12	100	70	0.4	—	2.2	
	2N966	MO	npn, DM, ge	*460	300	100	4	*12	100	70	0.4	—	2.2	
	2N967	MO	npn, DM, ge	*460	300	100	4	*12	100	70	0.4	—	2.2	
	2N1143	TI	pnnp, DB, ge	480	750	100	10	25	100	8	5	—	1.5	
	2N1151	MO	pnnp, MS, ge	500	3w	100	40	*25	500	100db	1.5	—	7	
HF 65	2N1562	MO	pnnp, MS, ge	*500	3w	100	40	*25	500	100db	1.5	—	7	UHF Amp. MIL PG-26db @ 200mc, MO
	2N2095	SPR	pnnp, ED, ge	*500	1w	100	—	*30	300	300	0.2	—	6.5	
	2N2098	SPR	pnnp, ED, ge	*500	1w	100	—	*30	300	300	2	—	6.5	
	2N2501	MO	pnnp, P, E, si	*500	360	200	2.06	*40	*50/150	—	—	—	*4	
	2N700	MO	pnnp, DM, ge	600	75	100	1	*25	50	100db	0.4	—	1.1	
	2N700A	MO	pnnp, DM, ge	600	75	100	1	*25	50	50db/200mc	0.4	—	1.1	
HF 66	2N709	SYL	npn, P, si	*600	300	200	—	*15	—	*20-120	.005	—	*3	U.S. MIL only U.S. MIL only PG-30db @ 200mc, MO TI, MO
	2N709/46	SYL	npn, P, si	*600	400	200	—	*15	—	*20-120	.005	—	*3	
	2N709/51	SYL	npn, P, si	*600	300	200	—	*15	—	*20-120	.005	—	*3	
	2N1142	TI	pnnp, DB, ge	600	750	100	10	30	100	10	0.7	—	1.5	
	2N2368	FA	npn, DP, si	*650	1200	200	6.9	15	—	*40	0.1	—	*2.5	
	2N2369	FA	npn, DP, si	*650	1200	200	6.9	15	—	*40	0.1	—	*2.5	
HF 67	2N1645	WE	pnnp, DJ, ge	700	—	100	12.5	*35	300	50	1.5	—	10	U.S. MIL only U.S. MIL only PG-30db @ 200mc, MO TI, MO
	2N537	WE	pnnp, DJ, ge	750	250	100	3.3	—	100	100	2	—	2.8	
	2N1094	WE	pnnp, DM, ge	750	150	100	2.0	—	40	13	1.2	—	4	
	2N1141	TI	pnnp, DB, ge	750	750	100	10	*35	100	12	0.7	—	1.5	
	2N1195	WE	pnnp, DM, ge	750	250	100	4.0	*30	50	13	1.2	—	4	
	2N709	FA	npn, DP, si	*800	1000	200	5.0	6.0	—	*55	0.005	—	*2.5	
HF 68	2N709A	SYL	npn, P, si	*800	300	200	—	*15	—	*30-90	.050	—	*3	U.S. MIL only U.S. MIL only PG-30db @ 200mc, MO TI, MO
	2N709A/46	SYL	npn, P, si	*800	400	200	—	*15	—	*30-90	.050	—	*3	
	2N709A/51	SYL	npn, P, si	*800	300	200	—	*15	—	*30-90	.050	—	*3	
	2N917	FA	npn, DP, si	*800	300	200	1.71	15	—	*50	0.0005	—	*1.0	
	2N917	FA	npn, DP, si	*800	300	200	1.71	15	—	*50	0.0005	—	*1.0	
	2N917	FA	npn, DP, si	*800	300	200	1.71	15	—	*50	0.0005	—	*1.0	

Bendix "Leaf"* Silicon Transistor

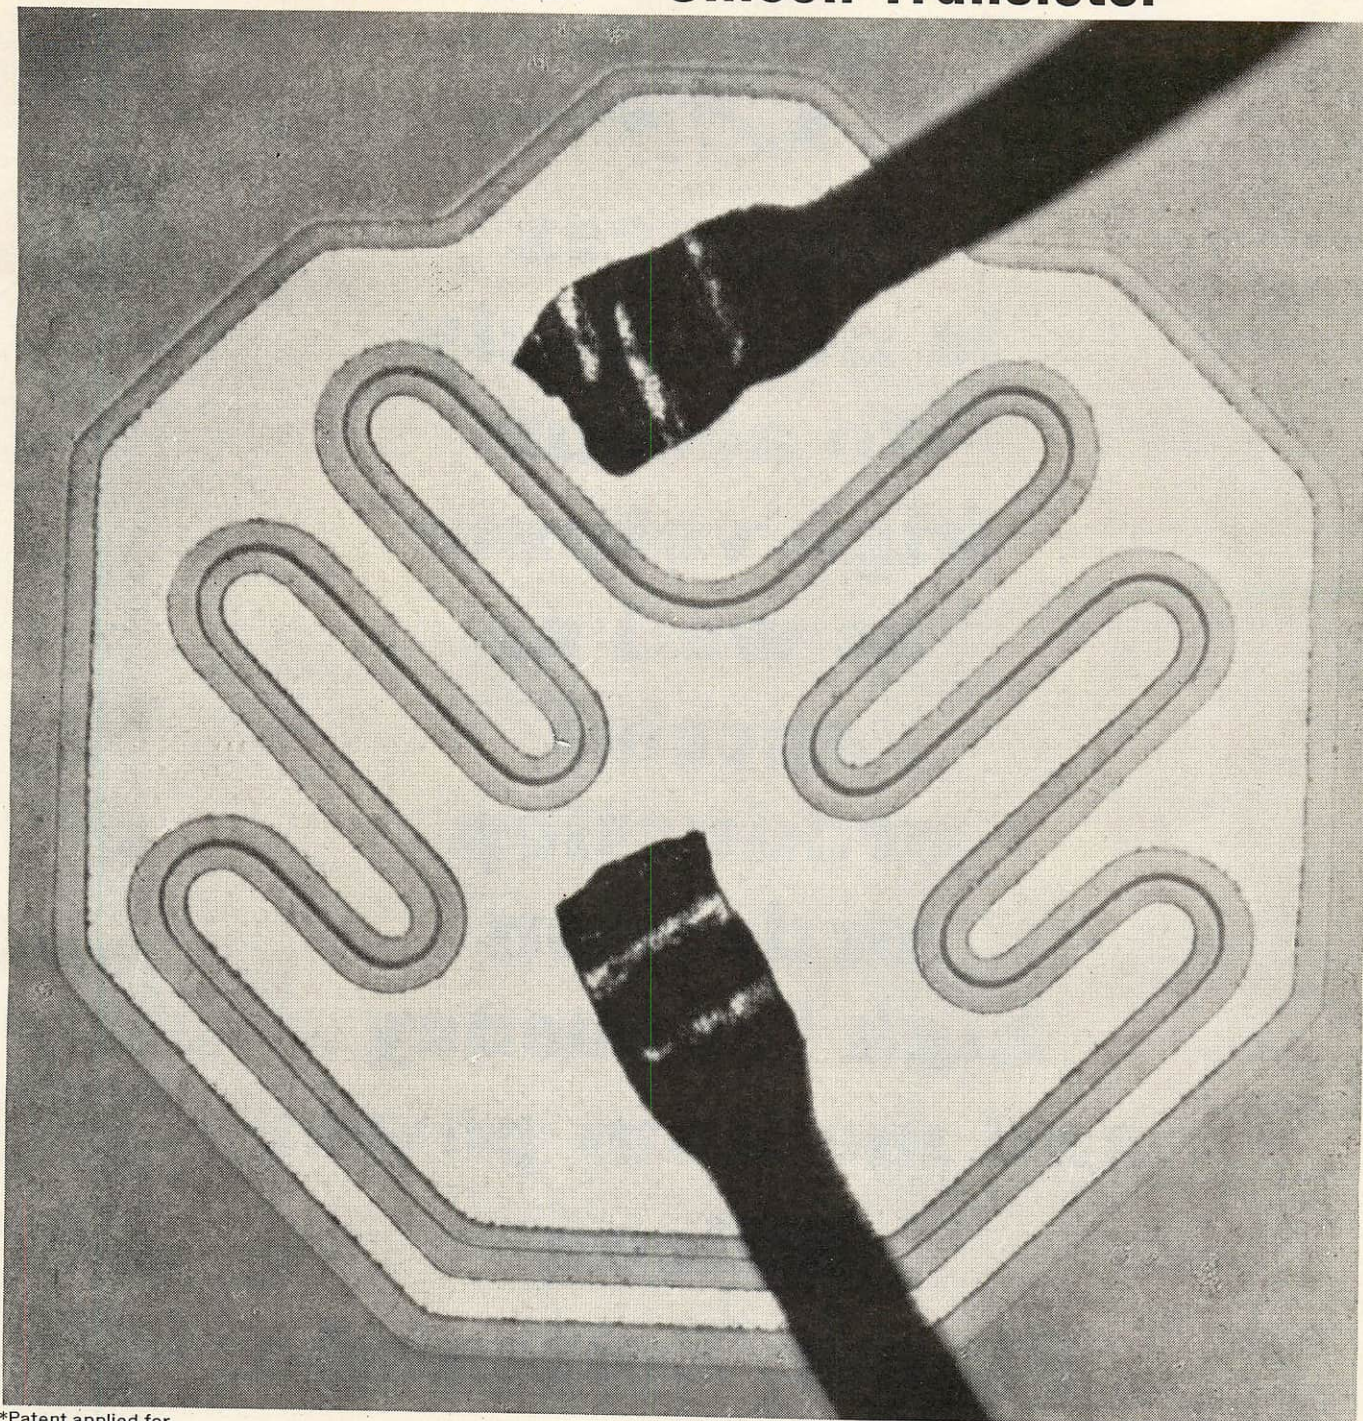

*Patent applied for.

Magnified 265 times—actual size .025".

BENDIX SILICON PLANAR EPITAXIAL TRANSISTORS OFFER THESE ADVANTAGES:

MECHANICAL

"Leaf" Configuration
Larger Emitter Area
Larger Emitter Periphery
Larger Bonding Area
TO-5 and TO-18 Packages

ELECTRICAL

Lower Saturation Voltage
Higher Gain
Improved Beta Linearity
Higher Reliability
81 Types

Write us in Holmdel, New Jersey, soon.


Bendix Semiconductor Division



May 24, 1963

ON READER-SERVICE CARD CIRCLE 451

T33



**Amperex
is now ready
to accept
high volume
as well as
special
production
orders on
high frequency
and medium power
Silicon
Planar/Epitaxial
Transistors**

Authorized AMPEREX Semiconductor Distributors are geared to expedite your requirements for both Military and Industrial types of AMPEREX Silicon Planar/Epitaxial Transistors:

California

R. V. WEATHERFORD COMPANY
Glendale 1, Calif.

KIERULFF ELECTRONICS
Los Angeles 15, Calif.

BRILL SEMICONDUCTOR CORP.
Oakland 6, Calif.

Colorado

INTERSTATE RADIO & SUPPLY
Denver 4, Colorado

Connecticut

CRAMER ELECTRONICS, INC.
Hamden, Conn.

District of Columbia

ELECTRONIC WHOLESALERS, INC.
Washington 1, D. C.

Florida

THUROW ELECTRONICS, INC.
Cocoa, Fla. • Jacksonville, Fla. • Miami, Fla.
Orlando, Fla. • Pensacola, Fla. • Tampa, Fla.

Illinois

NEWARK ELECTRONICS CORP.
Chicago, Ill.

Indiana


RADIO DISTRIBUTING COMPANY
Indianapolis 6, Indiana

Massachusetts

RADIO SHACK CORP.
Boston, Mass.

Michigan

RADIO SPECIALTIES COMPANY
Detroit, Michigan



The unique combination of co-ordinated engineering skills and automated production technology has earned for AMPEREX a position of leadership as originator and mass producer of high reliability, high yield PADT germanium transistors, as well as being the first mass producer of reliable, premium quality frame grid tubes. This breadth and depth of "team-thinking-approach" is manifest in the advanced facilities of the two AMPEREX semiconductor plants in Rhode Island. The Slatersville facility is renowned for its leadership in PADT transistors. The Cranston plant is devoted exclusively to development and manufacture of highest quality Silicon Planar/Epitaxial Transistors—to satisfy the most exacting requirements of the fields of Instrumentation, Guidance and Control, Computers and Data Processing and Communications. Available for prompt delivery in both volume and/or specialty production, you will find AMPEREX Silicon Planar/Epitaxials specifically designed for diverse applications:

military types

JAN-2N497—MIL-S-19500/74C	JAN-2N696M—MIL-S-19500/99B
JAN-2N498—MIL-S-19500/74C	USA-2N697—MIL-S-19500/99A
JAN-2N656—MIL-S-19500/74C	JAN-2N697M—MIL-S-19500/99B
JAN-2N657—MIL-S-19500/74C	USA-2N706—MIL-S-19500/120
USA-2N696—MIL-S-19500/99A	JAN-2N706M—MIL-S-19500/120A
USN-2N1613—MIL-S-19500/181	

high voltage amplifiers

2N497	2N699	2N870
2N498	2N719	2N871
2N656	2N719A	2N1889
2N657	2N720	2N1890
2N698	2N720A	2N1893

small signal and low level amplifiers

2N910	2N930
2N911	2N1973
2N912	2N1974
2N929	2N1975

general purpose amplifiers and switches

2N696	2N718	2N1420
2N697	2N718A	2N1613
2N717	2N956	2N1711

high speed saturating switches

2N706, 2N708, 2N914

uhf and vhf amplifiers

2N915, 2N916

industrial types

2N1983	2N1985	2N1987
2N1984	2N1986	2N1990

low level choppers

2N2569, 2N2570

Available in TO-5 and TO-18 cases.

Write for further details and your copy of the new edition of the AMPEREX Silicon Planar/Epitaxial Semiconductor condensed catalog. Applications engineering assistance available.

Amperex Electronic Corporation, Semiconductor and Receiving Tube Division, Hicksville, Long Island, New York.

IN CANADA: PHILIPS ELECTRON DEVICES, LTD., TORONTO 17, ONTARIO



Minnesota

ADMIRAL DISTRIBUTORS, INC.
St. Louis Park 16, Minn.

Missouri

BURSTEIN-APPLEBEE COMPANY
Kansas City, Missouri

INTERSTATE INDUSTRIAL
ELECTRONICS
St. Louis 32, Missouri

New York

MILO ELECTRONICS
New York, N. Y.
ROME ELECTRONICS
Rome, N. Y.

Ohio

UNITED RADIO, INC.
Cincinnati, Ohio

Oklahoma

OIL CAPITAL INDUSTRIAL ELECTRONIC
DISTRIBUTORS
Tulsa, Oklahoma

Oregon

UNITED RADIO SUPPLY, INC.
Portland 9, Oregon

Pennsylvania

RADIO ELECTRIC SERVICE CO.
Philadelphia, Pa.
CAMERADIO COMPANY
Pittsburgh, Pa.

Texas

BUSACKER ELECTRONIC EQUIPMENT
CO., INC.
Houston 19, Texas

Washington

ROBERT E. PRIEBE COMPANY
Seattle 1, Washington


read this

Now there is a new approach to micro-circuit packaging . . . BIPCO® Diode Matrices and Transistor Strips. They provide the only approach combining:



- Total function logic
- Connection oriented packaging
- Connection oriented batch manufacturing

See how these unique features will benefit you.

see this

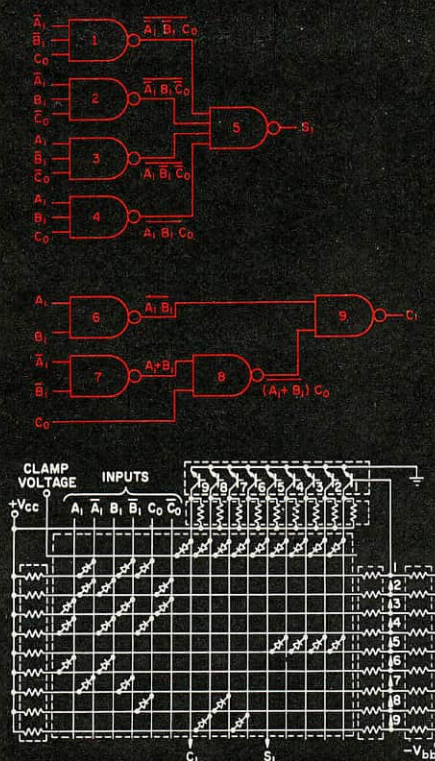

use this

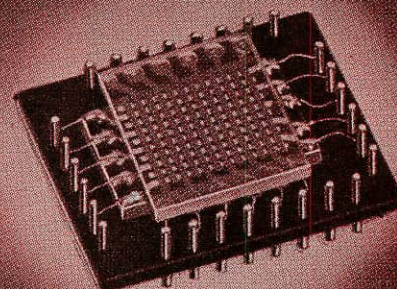

Above is the logic diagram for a full adder and its equivalent BIPCO circuit. Note how "total function" logic is performed with matrices of diodes and strips of transistors and resistors. Since the interconnections are always the same, other functions (counting, decoding, accumulating, etc.) can be performed by simply changing the arrangement of the diodes within the matrix. You can specify parameters, logic levels.

BIPCO devices containing up to 100 silicon diodes and 10 silicon transistors are available as individual packages or as printed circuit assemblies for counting, decoding and code-converting applications. Because the diodes and transistors are manufactured and connected in batches, the cost of these units is competitive with that of conventional components and less than that of other micro-circuit devices.

Write today for our newest brochure . . . "BIPCO Logic | the Total Function Approach".

ELECTRONIC CONTRIBUTIONS BY
Burroughs Corporation
ELECTRONIC COMPONENTS DIVISION
PLAINFIELD, NEW JERSEY




HF

continued

Cross Index Key	Type No.	Mfr.	Type	t_{oe} $\ast f_T$ $\ast f_{ab}$ (mc)	MAX. RATINGS				CHARACTERISTICS					Remarks
					P_c (mw)	T_i (°C)	$m_w/^\circ C$	V_{CEO} $\ast V_{CBO}$ (v)	I_C (ma)	h_{fe} $\ast h_{FE}$	I_{CO} (μa)	NF (db)	C_{ob} (pf)	
HF 64	2N2416	TI	pnp, DM, ge	*800	75	100	1.0	*15	20	20	1	3.4	*1.2	MO
	2N918	FA	pnp, DP, si	*900	300	200	1.71	15	—	—	0.0005	—	1.0	
	2N2415	TI	pnp, DM, ge	*900	75	100	1.0	*15	20	30	1	2.4	*1.2	
	2N797	TI	pnp, MS, ge	*1000	150	—	—	7	150	40	1	—	*4	
	2N955	RCA	pnp, DDM, ge	*1000	150	100	—	*12	150	10	0.5	—	*4	
	2N2808	RA	pnp, PE, si	*1000	300	200	—	*30	—	*5	0.002	7.5	*0.7	
	2N2784	SYL	pnp, P, si	*1200	300	200	—	*15	—	*40-120	.005	—	*3	
	2N2784 46	SYL	pnp, P, si	*1200	400	200	—	*15	—	*40-120	.005	—	*3	
	2N2784 51	SYL	pnp, P, si	*1200	300	200	—	*15	—	*40-120	.005	—	*3	
	2N218	SY	pnp, AJ, ge	—	80	85	1.3	*20	—	22-110	50	—	—	
HF 65	2N231	SPR	pnp, SPT, ge	—	9	55	*0.9	*4.5	3	66	3	—	—	
	2N233	SY	pnp, AJ, ge	—	50	75	1	*10	50	10	50	—	—	
	2N247	SY	pnp, Dr, ge	—	80	100	1	*40	10	20-175	50	—	—	
	2N312	SY	pnp, AJ, ge	—	75	85	1	*15	—	—	60	—	—	GI, TI
	2N410	SY	pnp, AJ, ge	—	50	75	1	*20	—	22-110	5	—	—	
	2N504	SPR	pnp, MD, ge	—	30	85	—	*35	50	16	100	—	—	GI
	2N544	SY	pnp, DJ, ge	—	80	85	1.3	*18	10	20-175	4	—	—	
	2N524	SY	pnp, DJ, ge	—	100	100	1.3	*20	—	20	30	—	—	
	2N706A	GE	pnp, si	—	300	175	2	25	—	2.0	0.5	—	—	Planar, Epitaxial, RA
	2N706C	SY	pnp, DM, si	—	360	200	2	40	50	20-60	.025	—	—	CL, RA
HF 66	2N708	GE	pnp, si	—	360	200	—	40	—	3.0	0.5	—	6.0	Planar Epitaxial CL, MO
	2N717	GE	pnp, si	—	0.4	175	—	60	—	—	1.0	—	35	Planar Passivated, RA
	2N718	GE	pnp, si	—	0.4	175	—	60	—	—	1.0	—	35	Planar Passivated, CL, PSI
	2N718A	GE	pnp, si	—	0.5	200	—	75	—	—	10 μa	12	25	Planar Passivated, PSI
	2N719	GE	pnp, si	—	0.4	175	—	120	—	15	2.0	—	20	Planar Passivated, PSI
	2N719A	GE	pnp, si	—	0.5	200	—	120	1.0amp	15	10 μa	—	15	Planar Passivated, PSI
	2N720	GE	pnp, si	—	0.4	175	—	120	—	30	2.0	—	20	Planar Passivated, PSI
	2N720A	GE	pnp, si	—	0.5	200	—	120	—	30	—	—	15	Planar Passivated, PSI
	2N743	SY	pnp, MS, si	—	300	175	2	*20	200	20-60	1	—	—	Planar Epitaxial, CL, GI, NA, TI, MO
	2N744	SY	pnp, MS, si	—	300	175	2	*20	200	40-120	1	—	—	Epitaxial, CL, GI, NA, TI, MO
HF 67	2N753	TI	pnp, MS, si	—	1w	175	6.7	25	50	—	0.5	—	5	GI, NA, GE, CL
	2N768	SPR	pnp, MD, ge	—	35	100	—	*12	100	40	1	—	—	PH
	2N769	SPR	pnp, MD, ge	—	35	100	—	*12	100	55	0.3	—	—	PH
	2N781	SY	pnp, MS, ge	—	150	100	2	15	*200	20	3	—	—	Epitaxial, GE
	2N782	SY	pnp, MS, ge	—	150	100	2	*12	200	20	3	—	—	Epitaxial, GE
	2N783	SY	pnp, MS, si	—	300	175	2	40	200	20-60	.25	—	—	Epitaxial, CL, GI, MO
	2N784	SY	pnp, MS, si	—	300	175	2	30	200	25	.25	—	—	(CL, Epitaxial), GI
	2N828	GE	pnp, ge	—	150	100	—	15	200	3.0	3.0	—	6.0	Mesa Epitaxial, RCA
	2N834	GE	pnp, si	—	300	175	—	40	200	3.5	0.5	—	4.0	Planar Epitaxial CL
	2N849/TI-430	TI	pnp, EP, si	—	1000	—	—	15	30	*20-60	—	—	—	
HF 68	2N850/TI-431	TI	pnp, EP, si	—	1000	—	—	15	30	*40-120	—	—	—	
	2N851/TI-422	TI	pnp, EP, si	—	1000	—	—	12	200	*40-120	—	—	—	
	2N852/TI-423	TI	pnp, EP, si	—	1000	—	—	12	200	3.0	25 μa	—	—	Planar Epitaxial
	2N914	GE	pnp, si	—	360	200	—	40	—	2.5	10	—	3.5	Planar Passivated
	2N915	GE	pnp, si	—	360	200	—	70	—	—	—	—	—	
	2N929	SYL	pnp, P, si	—	300	200	—	*45	—	—	—	—	—	
	2N930	SYL	pnp, P, si	—	300	200	—	*45	—	—	—	—	—	
	2N955	RCA	pnp, MS, ge	—	150	—	—	12	100	*60	—	—	—	
	2N960	GE	pnp, ge	—	150	100	—	15	150	20	3.0	—	4.0	Mesa Epitaxial, RA
	2N961	GE	pnp, ge	—	150	100	—	12	150	20	3.0	—	4.0	Mesa Epitaxial
HF 69	2N962	GE	pnp, ge	—	150	100	—	12	150	20	3.0	—	4.0	Mesa Epitaxial
	2N964	GE	pnp, ge	—	150	100	—	15	150	20	3.0	—	4.0	Mesa Epitaxial
	2N965	GE	pnp, ge	—	150	100	—	12	150	20	3.0	—	4.0	Mesa Epitaxial
	2N966	GE	pnp, ge	—	150	100	—	12	150	20	3.0	—	4.0	Mesa Epitaxial
	2N994	GE	pnp, ge	—	200	150	—	15	150	20	3.0	—	6.0	Mesa Epitaxial
	2N1158	PH	pnp, MD, ge	—	60	100	0.8	*20	100	50	5	—	*3	
	2N1130A	PH	pnp, MD, ge	—	75	100	1	*20	100	50	5	—	*2.8	
	2N1204	SPR	pnp, MD, ge	—	200	100	—	*20	500	40	7	—	—	
	2N1264	SY	pnp, DD, ge	—	50	75	1	*20	10	15	50	—	—	PH, MO
	2N1266	SY	pnp, AJ, ge	—	80	85	1.3	*10	—	10	100	—	—	
HF 70	2N1398	TI	pnp, MS, ge	—	50	85	—	30	10	2.3	10	5	—	
	2N1399	TI	pnp, MS, si	—	50	85	—	30	10	2.3	10	6	—	
	2N1400	TI	pnp, MS, si	—	50	85	—	30	10	2.3	10	6	—	
	2N1401	TI	pnp, MS, ge	—	50	85	—	30	10	1.6	10	—	—	
	2N1401A	TI	pnp, MS, ge	—	50	85	—	30	10	2	10	—	—	
	2N1402	TI	pnp, MS, ge	—	50	85	—	30	10	2	10	—	—	
	2N1450	SY	pnp, AJ, ge	—	120	100	1.6	*30	10	2.2	10	—	—	
	2N1494	SPR	pnp, MD, ge	—	400	100	—	*20	500	15	10	—	—	
	2N1515	AMP	pnp, PADT, ge	—	83	75	—	*20	10	60	—	—	—	GI
	2N1646	SY	pnp, MS, ge	—	150	100	2	*15	50	20	3	—	—	PH, MO OC169

HF *continued*

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T **f _{ab} (mc)	MAX. RATINGS					CHARACTERISTICS					Remarks
					P _c (mw)	T _j (°C)	mW/°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{fe} *h _{FE}	I _{CO} (μa)	NF (db)	C _{oe} *C _{ob} (pf)		
HF 71	2N1676	PH	pnnp,SAT,si	—	100	140	—	*4.5	50	10.5	.001	—	—	SPR, chopper	
	2N1677	PH	pnnp,SAT,si	—	100	140	—	4.5	50	50	0.001	—	—	Spr. Chopper	
	2N1684	SY	pnnp,AJ,ge	—	100	100	1.3	*25	100	—	5	—	—	Planar Passivated, RA	
	2N1711	GE	npn,si	—	0.8	200	—	75	—	50	10	8	25		
	2N1742	PH	pnnp,MD,ge	—	60	125	—	*20	55	*33	0.8	4.9	—		
	2N1743	PH	pnnp,MD,ge	—	60	125	—	*20	50	*33	0.8	10	—		
	2N1744	PH	pnnp,MD,ge	—	60	125	—	*20	50	*33	0.8	—	—		
	2N1745	PH	pnnp,MD,ge	—	60	100	0.8	*20	50	*33	1	—	—		
	2N1747	PH	pnnp,MD,ge	—	60	100	0.8	*20	50	70	1	—	—		
2N1782	SY	pnnp,AJ,ge	—	100	100	1.3	*30	100	30-150	6	—	—			
HF 72	2N1783	SY	pnnp,AJ,ge	—	100	100	1.3	*30	100	30-90	5	—	—	Planar Passivated Epitaxial	
	2N1784	SY	pnnp,AJ,ge	—	100	100	1.3	*30	100	20	4	—	—		
	2N1841	WE	npn,DM,si	—	1250	150	100	75	2000	30	.1	—	—		
	2N1865	PH	pnnp,MD,ge	—	60	100	0.8	*20	50	70	2	—	—		
	2N1866	PH	pnnp,MD,ge	—	60	100	0.8	*35	50	70	1	—	—		
	2N1867	PH	pnnp,MD,ge	—	60	100	0.8	*35	50	50	1	—	—		
	2N1868	PH	pnnp,MD,ge	—	60	100	0.8	*20	50	*33	1.5	—	—		
	2N1893	GE	npn,si	—	0.8	200	—	120	—	30	15	—	15		
	2N1958	SY	npn,MS,si	—	600	175	4	*60	500	20-60	0.5	—	18		
2N1959	SY	npn,MS,si	—	600	175	4	*60	500	40-120	0.5	—	18			
HF 73	2N1960	SY	pnnp,MS,ge	—	150	100	2	*15	200	25	3	—	—	Epitaxial	
	2N1961	SY	pnnp,MS,ge	—	150	100	2	*12	200	20	3	—	—	Epitaxial	
	2N1962	SY	npn,MS,si	—	400	175	2.6	*40	200	20-60	.25	—	3	Epitaxial	
	2N1963	SY	npn,MS,si	—	400	175	2.6	*30	200	25	.25	—	3.5	Epitaxial	
	2N1964	SY	npn,MS,si	—	400	175	2.6	*60	500	20-60	0.5	—	18	Epitaxial	
	2N1965	SY	npn,MS,si	—	400	175	2.6	*60	500	40-120	0.5	—	18	Epitaxial	
	2N1969	SY	pnnp,AJ,ge	—	150	100	2	*30	400	50-200	5	—	20	TI	
	2N2192	GE	npn,si	—	0.8	200	—	60	1.0a	2.5	10mμa	—	20	Planar Epitaxial	
	2N2192A	GE	npn,si	—	0.8	200	—	60	1.0a	2.5	10mμa	—	20	Planar Epitaxial	
2N2193	GE	npn,si	—	0.8	200	—	80	1.0a	2.5	10mμa	—	20	Planar Epitaxial		
HF 74	2N2193A	GE	npn,si	—	0.8	200	—	80	1.0a	2.5	10mμa	—	20	Planar Epitaxial	
	2N2194	GE	npn,si	—	0.8	200	—	60	1.0a	2.5	10mμa	—	20	Planar Epitaxial	
	2N2194A	GE	npn,si	—	0.8	200	—	60	1.0a	2.5	10mμa	—	20	Planar Epitaxial	
	2N2195A	GE	npn,si	—	0.6	200	—	45	1.0amp	2.5	100mμa	—	20	Planar Epitaxial, RA	
	2N2360	PH	pnnp,MD,ge	—	60	125	0.75	*20	50	*33	0.8	—	—	Planar Epitaxial, RA	
	2N2361	PH	pnnp,MD,ge	—	60	125	0.75	*20	50	*33	0.8	—	—		
	2N2362	PH	pnnp,MD,ge	—	60	120	2	*20	50	*33	0.8	—	—		
	2N2363	TI	pnnp,MS,ge	—	125	—	—	60	30	135	3	—	—		
	2N2389	TI	npn,PL,si	—	2000	—	—	35	600	*40-120	—	—	—		
2N2395	TI	npn,PL,si	—	2000	—	—	40	300	*20-60	—	—	—	—		
HF 75	2N2396	TI	npn,PL,si	—	2000	—	—	40	300	*40-120	—	—	—	Planar Epitaxial, RA	
	2N2398	PH	pnnp,MD,ge	—	60	100	2	*20	50	*33	0.8	—	—		
	2N2399	PH	pnnp,MD,ge	—	60	100	2	*20	50	*33	0.8	—	—		
	2N2410	TI	npn,PE,si	—	2500	—	—	30	800	*30-120	—	—	—		
	2N2411	TI	pnnp,PE,si	—	1000	—	—	20	100	*20-60	—	—	—		
	2N2412	TI	pnnp,PE,si	—	1000	—	—	20	100	*40-120	—	—	—		
	10B551	GE	npn,GP,si	—	100	125	1.0	*40	—	*30-120	50mμa	—	6.0		
	10B553	GE	npn,PE,si	—	100	125	1.0	*40	—	*30-120	.5	—	6.0		
	10B555	GE	npn,PE,si	—	100	125	1.0	*25	—	20	.5	—	6.0		
10B556	GE	npn,PE,si	—	100	125	1.0	*25	—	*20-60	.5	—	6.0			
HF 76	10C573	GE	npn,P,si	—	100	125	1.0	*45	—	36-90	0.2	—	*8	Drift	
	10C574	GE	npn,P,si	—	100	125	1.0	*45	—	73-333	0.2	—	*8		
	11B551	GE	npn,P,si	—	100	125	1.0	*60	—	*20-60	.5	—	—		
	11B552	GE	npn,P,si	—	100	125	1.0	*60	—	*40-120	.5	—	—		
	11B554	GE	npn,P,si	—	100	125	1.0	*60	—	*40-120	25mμa	12	*25		
	11B555	GE	npn,P,si	—	100	125	1.0	*60	—	*100-300	25mμa	12	*25		
	11B556	GE	npn,P,si	—	100	125	1.0	*100	—	*40-120	25mμa	—	*15		
	11B560	GE	npn,P,si	—	100	125	1.0	*100	—	*40-120	.5	—	—		
	GT1665	GI	pnnp,AJ,ge	—	150	100	2	*100	—	25	4	—	—		
MA-1	SPR	pnnp,MAT,ge	—	25	75	—	6	50	40	10	—	—			
HF 77	MA-2	SPR	pnnp,MAT,ge	—	20	75	—	3	50	40	10	—	—	hi freq., hi pwr.	
	PT850	PSI	npn,DM,si	—	2w	175	13.3	120	—	2	2	—	—		
	PT850A	PSI	npn,DM,si	—	2.8w	175	18.6	120	—	2	2	—	—		
	SO-1	SPR	pnnp,SBT,ge	—	20	65	—	5	5	10	10	—	—		
	SO-2	SPR	pnnp,SBT,ge	—	15	65	—	3	5	10	10	—	—		
	SO-3	SPR	pnnp,SBT,ge	—	20	65	—	5	5	10	10	—	—		
ST3031	TR	npn,DJ,si	—	150	175	—	—	—	—	—	—	—	—		

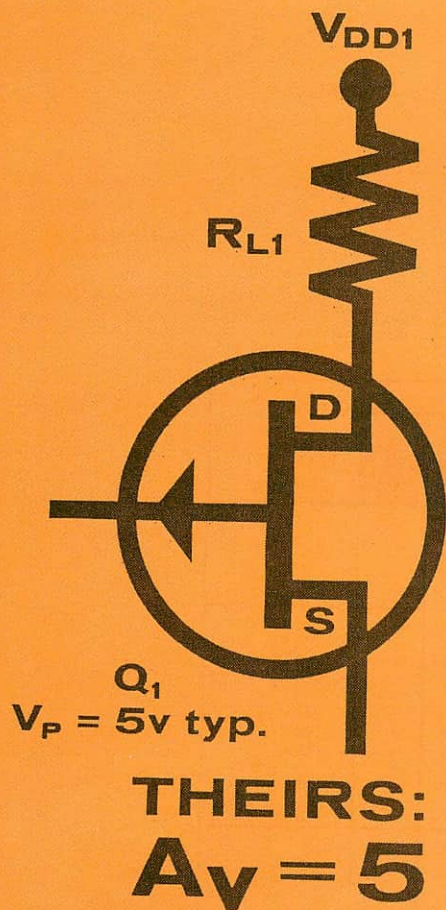

WHY DO LOW PINCH-OFF UNIFETS* GIVE HIGHER VOLTAGE AMPLIFICATION?

BECAUSE A_V IS INVERSELY PROPORTIONAL TO V_P WHEN $V_{DD1} = V_{DD2}$ AND $V_{DS1} = V_{DS2}$. YOU ALSO GET GREATER BIAS STABILITY AND WIDER DYNAMIC RANGE.

AVAILABLE NOW IN FOUR g_m VALUES AS SHOWN. WRITE FOR FILE #841, THE DESCRIPTIVE PAPER ON LOW V_P UNIFET APPLICATIONS.

Low Pinch-off UNIFETs *(Unipolar Field-Effect Transistors) now available:

Typical	2N2841	2N2842	2N2843	2N2844	
V_P	0.8	0.8	0.8	0.8	v
g_m	90	270	800	2000	μmho
I_{DSS}	-50	-150	-450	-1000	μa
NF at 1kc	0.5	0.5	0.5	0.5	db

Pinch-off: 1.7v max.—Gate-drain breakdown: 20v min.—T0-18 package

AMPLIFICATION CALCULATIONS FOR HIGH PINCH-OFF vs. LOW PINCH-OFF UNIFETS

For all UNIFETs, it can be shown that:

$$g_{m0}^{\dagger} = \frac{2.5 I_{DSS}^{\dagger\dagger}}{V_P} \text{ within about 20\%}$$

When $V_{DD1} = V_{DD2} = -15v$ and $V_{DS1} = V_{DS2} = -5v$ then $I_{DSS1} R_{L1} = 10v$ and $I_{DSS2} R_{L2} = 10v$

Available voltage amplification, $A_V = g_m R_L$

From these equations, it can be shown that $A_{V1} = \frac{25}{V_{P1}}$ and $A_{V2} = \frac{25}{V_{P2}}$

since $V_{P1} = 5v$ $V_{P2} = 0.8v$

$A_{V1} = 5$ $A_{V2} = 31$

$\dagger g_m$ when $V_{GS} = 0$. $\dagger\dagger$ Drain-source current when $V_{GS} = 0$.



Siliconix incorporated

1140 West Evelyn Ave. • Sunnyvale 11, California

Telephone 245-1000 • Area Code 408 • TWX 408-737-9948

ON READER-SERVICE CARD CIRCLE 454

POWER

Types rated at one watt and higher. In order of increasing power dissipation.

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS					Remarks
					w/°C	T _j (°C)	V _{CEO} *V _{CBO} (v)	I _c (a)	h _{FE} *h _{FE}	I _{CO} (ma) *I _T (μa)	f _{ae} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)	
P 1	2N2038	TR	npn	0.6	0.03	200	45	0.5	12-36	0.001	—	—	—	
	2N2039	TR	npn	0.6	0.03	200	75	0.5	12-36	0.001	—	—	—	
	2N2040	TR	npn	0.6	0.03	200	45	0.5	30-90	0.001	—	—	—	
	2N2041	TR	npn	0.6	0.03	200	75	0.5	30-90	0.001	—	—	—	
	2N2198	TR	npn	0.6	0.025	200	80	—	20-70	0.010	—	—	—	
P 2	2N957	PSI	npn,TPD,si	0.8w	0.006	150	40	—	*45	0.01	250	—	—	TR, PSI
	2N339	TI	npn,GR,si	1.0	0.008	150	55	.06	9-90	.001	6	30	—	
	2N340	TI	npn,GR,si	1.0	0.008	150	85	.06	9-90	.001	6	30	—	
	2N341	TI	npn,GR,si	1.0	0.008	150	*125	.06	9-90	.001	6	30	—	
	2N341A	TR	npn,DJ,si	1	0.008	200	*125	.1	15-90	.001	—	—	—	
	2N342	TI	npn,GR,si	1.0	0.008	150	60	.06	9-32	.001	6	30	—	TR
	2N342A	TI	npn,GR,si	1.0	0.008	150	85	.06	9-32	.001	6	30	—	
	2N342B	TI	npn,GJ,si	1.0	—	—	85	0.6	9-32	—	—	—	—	TR
	2N343	TI	npn,GR,si	1.0	0.008	150	60	.06	28-90	.001	8	30	—	
	2N343A	TR	npn,DJ,si	1	.008	150	*60	—	29-90	.001	—	—	—	
P 3	2N343B	TI	npn,GJ,si	1.0	—	—	65	0.6	28-90	—	—	—	—	MO
	2N497A	BE	npn,PL,si	1	—	200	60	—	*12-36	—	—	—	—	
	2N498A	BE	npn,PL,si	1	—	200	60	—	*12-36	—	—	—	—	
	2N556A	BE	npn,PL,si	1	—	200	60	—	*30-90	—	—	—	—	
	2N557A	BE	npn,PL,si	1	—	200	100	—	*30-90	—	—	—	—	
	2N706	FA	npn,DD,si	1.0	0.0067	175	*25	—	*45	*0.005	*400	—	—	
	2N707	PSI	npn,TPD,si	1	.006	175	56	—	12	.005ma	300	6	0.2	
	2N709	FA	npn,DP,si	1.0	0.005	200	6.0	—	*55	*0.005	*800	—	—	
	2N988	PSI	npn,TPD,si	1	0.006	175	20	—	70	0.05	250	8	0.32	
	2N989	PSI	npn,TPD,si	1	0.006	175	20	—	70	0.05	250	11	0.63	
P 4	2N1048A	BE	npn,DM,si	1	—	165	120	0.5	*12-36	—	—	—	—	BE BE BE BE
	2N1206	TR	npn,GR,si	1.0	10	200	60	—	15-19	1	—	—	—	
	2N1207	TR	npn,GR,si	1.0	10	200	*125	—	15-90	1	—	—	—	
	2N2017	GE	npn,MS,si	1.0	—	200	60	—	30	10	—	—	—	
	2N2106	GE	npn,MS,si	1.0	—	150	60	—	12-36	200*	15	—	—	
	2N2107	GE	npn,MS,si	1.0	—	150	60	—	30-90	200*	15	—	—	
	2N2108	GE	npn,MS,si	1.0	—	150	60	—	30	200*	15	—	—	
	2N2726	GE	npn,DM,si	1.0	—	200	*200	—	*30-90	*1.0	—	—	—	
	2N2727	GE	npn,DM,si	1.0	—	200	*200	—	*75-150	*1.0	—	—	—	
	7A30	GE	npn,DM,si	1.0	—	150	*50	—	*12-36	*10	15mc	—	—	
P 5	7A31	GE	npn,DM,si	1.0	—	150	*50	—	*30-90	*10	15mc	—	—	MO CL, MO RA
	7A32	GE	npn,DM,si	1.0	—	150	*50	—	*75-200	*10	15mc	—	—	
	2N708	FA	npn,DP,si	1.2	0.0069	200	15	—	*50	*0.004	*450	—	—	
	2N869	FA	npn,DP,si	1.2	0.0069	200	18	—	*50	0.0001	150	—	—	
	2N914	FA	npn,DP,si	1.2	0.0069	200	*15	—	*55	*0.004	*370	—	—	
	2N915	FA	npn,DP,si	1.2	0.0069	200	50	—	*100	*0.005	*350	—	—	
	2N916	FA	npn,DP,si	1.2	0.0069	200	25	—	*80	*0.002	*400	—	—	
	2N947	FA	npn,DP,si	1.2	0.0069	200	—	—	*50	*0.005	*400	—	—	
	2N995	FA	pnp,DP,si	1.2	0.0069	200	15	—	*60	0.0002	200	—	—	
	2N996	FA	pnp,DP,si	1.2	0.0069	200	12	—	*75	0.0002	200	—	—	
P 6	2N1566	TI	npn,MS,si	1.2	—	175	*80	50	100	1	50	—	—	TR,NA RA, PSI RA, PSI
	2N2368	FA	npn,DP,si	1.2	0.0069	200	15	—	*40	*0.1	*650	—	—	
	2N2369	FA	npn,DP,si	1.2	0.0069	200	15	—	*70	*0.1	*650	—	—	
	2N2656	PSI	npn,EM,si	1.2	0.006	200	25	200	50	0.01	250	10	0.05	
	PT720	PSI	npn,TPD,si	1.2	0.006	200	25	200	80	5	250	15	0.05	
	2N721	TR	pnp,PL,si	1.25	.010	200	*30	—	*20	*1	*50,000	—	—	
	2N722	TR	pnp,PL,si	1.25	.010	200	*50	—	*25	*1	*60,000	—	—	
	2N978	TR	pnp,PL,si	1.25	.010	200	*30	—	*15	*5	*40,000	—	—	
	2N717	FA	npn,DD,si	1.5	0.010	175	—	—	*40	*0.01	*80	—	—	
	2N718	FA	npn,DD,si	1.5	0.010	175	—	—	*80	*0.01	*100	—	—	
P 7	2N719	FA	npn,DD,si	1.5	0.010	175	—	—	*40	*0.01	*90	—	—	RA, PSI RA, PSI 0.5w @ 80mc PSI
	2N720	FA	npn,DD,si	1.5	0.010	175	—	—	*65	*0.01	*100	—	—	
	2N721	FA	pnp,DD,si	1.5	0.010	175	35	—	*30	*0.01	*70	—	—	
	2N722	FA	pnp,DD,si	1.5	0.010	175	35	—	*60	*0.01	*80	—	—	
	2N2786	AMP	pnp,ge	1.5	35	75	*34	150	*40	—	—	10	0.5	
	PT886	PSI	npn,TPD,si	1.6	0.01	175	22	—	—	0.3	180	—	150	
	PT887	PSI	npn,TPD,si	1.6	0.01	175	45	—	—	0.3	180	6.0	750	
	PT888	PSI	npn,TPD,si	1.6	0.01	175	45	—	—	0.3	180	4.0	1000	
	2N718A	FA	npn,DP,si	1.8	0.0103	200	—	—	*80	*0.0003	*100	—	—	
	2N719A	FA	npn,DP,si	1.8	0.0103	200	60	—	*40	*0.0003	*80	—	—	

New from Honeywell!

$V_{CE(sat.)}$

0.5

V MAX. @ $I_C = 5A$

$V_{BE(sat.)}$

1.2

V MAX. @ $I_C = 5A$

I_{CBO}


0.1

$\mu a @ V_{CB} = 60V$

$(I_C max =)$

10A

2N2811
2N2812
2N2813
2N2814
(NPN)

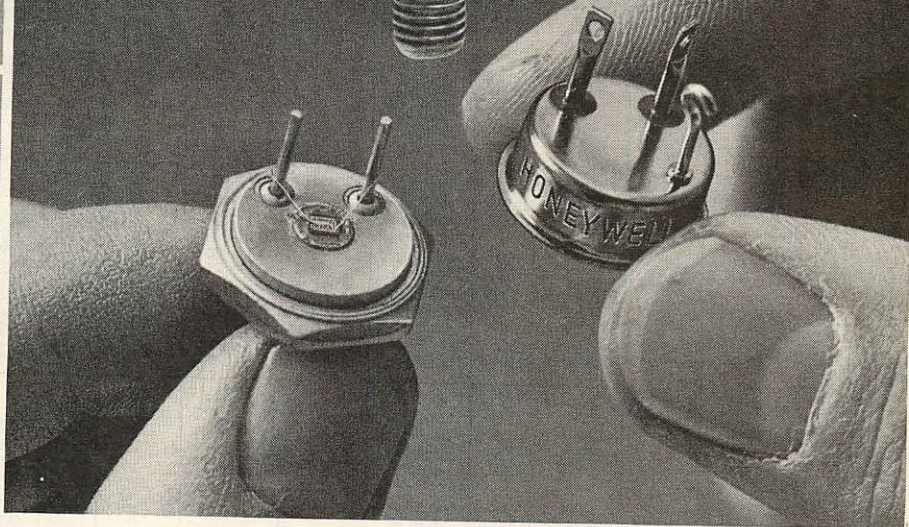

**Four new silicon planar JEDEC transistors
featuring 11/16-inch hex package**

40-WATT DISSIPATION @ 100°C.

	BV_{CBO}	BV_{CEO}	BV_{EBO}	GAIN
2N2811	80	60	8	20-60
2N2812	80	60	8	40-120
2N2813	120	80	8	20-60
2N2814	120	80	8	40-120

For price and delivery contact your nearest sales office or distributor. Or write: Dept. ED-5-42, Minneapolis-Honeywell, 2747 Fourth Avenue S., Minneapolis 8, Minn.

Honeywell

SEMICONDUCTOR PRODUCTS



EMPLOYMENT OPPORTUNITIES exist for engineers, scientists, and physicists in Florida. WRITE—Personnel Dept., 1177 Blue Heron Blvd., Riviera Beach, Fla. An Equal Opportunity Employer.

HONEYWELL INTERNATIONAL: Sales and service offices in all principal cities of the world.

P continued

Cross Index Key	Type No.	Mfr.	Type	MAX. RATINGS				CHARACTERISTICS					Remarks
				P_c (w)	T_j (°C)	V_{CEO} V_{CBO} (v)	I_c (a)	h_{fe} h_{FE}	I_{CO} (ma) (μ a)	f_{ae} f_T (kc)	Pwr. Gain (db)	Pwr. Out. (w)	
P 8	2N720A	FA	npn, DP, si	1.8	0.0103	80	—	*80	*0.0003	*100	—	—	PSI
	2N870	FA	npn, DP, si	1.8	0.0103	200	—	*80	*0.0003	*70	—	—	RA
	2N871	FA	npn, DP, si	1.8	0.0103	200	—	*200	*0.0003	*90	—	—	RA
	2N910	FA	npn, DP, si	1.8	0.0103	200	—	*135	*0.0003	*80	—	—	RA, PSI
	2N911	FA	npn, DP, si	1.8	0.0103	200	—	*70	*0.0003	*70	—	—	RA
	2N912	FA	npn, DP, si	1.8	0.0103	200	—	*42	*0.0003	*60	—	—	RA
	2N956	FA	npn, DP, si	1.8	0.0103	200	—	*200	*0.0003	*100	—	—	PSI
	2N1890	PSI	npn, TP, D, si	1.8	0.01	100	—	*200	*0.001	190	—	—	RA, PSI
	2N696	FA	npn, DD, si	2.0	0.0133	175	—	*40	*0.01	*60	—	—	—
	2N697	FA	npn, DD, si	2.0	0.0133	175	—	*75	*0.01	*80	—	—	RA, PSI
P 9	2N699	FA	npn, DD, si	2.0	0.0133	175	—	*65	*0.01	*100	—	—	RA
	2N1131	FA	npn, DD, si	2.0	0.0133	175	—	*30	*0.01	*70	—	—	MO
	2N1132	FA	npn, DD, si	2.0	0.0133	175	—	*60	*0.01	*90	—	—	RA
	2N1262	FA	npn, DD, si	2.0	0.0133	175	—	*35	*0.1	*80	—	—	RA
	2N1263	FA	npn, DD, si	2.0	0.0133	175	—	*45	*0.1	*110	—	—	RA
	2N1420	FA	npn, DD, si	2.0	0.0133	175	—	*150	*0.01	*130	—	—	PSI
	2N1840	PSI	npn, TP, D, si	2	0.013	25	500	15	0.3	180	—	—	RA
	2N1883	FA	npn, DD, si	2.0	0.016	150	—	4.0	*1.0	*10	—	—	RA
	2N1984	FA	npn, DD, si	2.0	0.016	150	—	4.0	*1.0	*10	—	—	RA
	2N1985	FA	npn, DD, si	2.0	0.016	150	—	4.0	*1.0	*50	—	—	RA
P 10	2N1986	FA	npn, DD, si	2.0	0.016	150	—	*100	*1.0	*80	—	—	RA
	2N1987	FA	npn, DD, si	2.0	0.016	150	—	*50	*1.0	*80	—	—	RA
	2N1988	FA	npn, DD, si	2.0	0.016	150	—	*70	*1.0	*80	—	—	RA
	2N1989	FA	npn, DD, si	2.0	0.016	150	—	*40	*1.0	*80	—	—	RA
	2N1990	FA	npn, DD, si	2.0	0.016	150	—	*40	*1.0	*50	—	—	RA
	2N1991	FA	npn, DD, si	2.0	0.016	150	—	*120	*0.005	*90	—	—	RA
	2N2303	FA	npn, DP, si	2.0	0.0133	175	—	13	*0.08	70	—	—	high freq., high pwr.
	2N1335	PSI	npn, MS, si	2.8	0.024	150	.075	13	*0.08	70	—	—	high freq., high pwr.
	2N1336	PSI	npn, MS, si	2.8	0.024	150	.075	13	*0.08	70	—	—	high freq., high pwr.
	2N1339	PSI	npn, MS, si	2.8	0.024	150	.075	—	*0.08	70	—	—	high freq., high pwr.
P 11	2N1340	PSI	npn, MS, si	2.8	0.024	150	.075	—	*0.08	70	—	—	high freq., high pwr.
	2N1341	PSI	npn, MS, si	2.8	0.024	150	.075	—	*0.08	70	—	—	high freq., high pwr.
	2N1342	PSI	npn, TP, D, si	2.8	0.018	175	300	12	0.01	190	8	0.7	RA, PSI
	2N698	FA	npn, DP, si	3.0	0.0172	200	—	*40	*0.0003	*70	—	—	high freq., high pwr., BE
	2N1505	PSI	npn, MS, si	3	0.2	175	—	7	—	70	—	—	high freq., high pwr., BE
	2N1506	PSI	npn, MS, si	3	0.2	175	—	9	—	70	—	—	high freq., high pwr., BE
	2N1506A	BE	npn, PL, si	3	—	200	—	*10-100	—	—	—	—	high freq., high pwr.
	2N1561	MO	npn, MS, si	3	.04	100	.25	10	.0015	500 mc	—	—	high freq., high pwr.
	2N1562	MO	npn, MS, ge	3	.04	100	.25	10	.0015	450 mc	—	—	high freq., high pwr.
	2N1564	PSI	npn, TP, D, si	3	0.02	175	80	30	0.01	190	—	—	—
P 12	2N1565	PSI	npn, TP, D, si	3	0.02	175	80	60	0.01	190	—	—	—
	2N1566	PSI	npn, TP, D, si	3	0.02	175	80	130	0.01	190	—	—	—
	2N1613	TR	npn, PL, si	3	.017	200	*75	*80	10ma	*60,000	—	—	—
	2N1613	FA	npn, DP, si	3.0	0.0172	200	—	*80	*0.0003	*80	—	—	—
	2N1692	MO	npn, MS, ge	3	.04	100	*25	10 db	.0015	500 mc	6	0.5	PSI
	2N1693	MO	npn, MS, ge	3	.04	100	*25	10 db	.0015	500 mc	6	.4	RA
	2N1711	TR	npn, PL, si	3	.017	200	*75	*100	10ma	*70,000	—	—	—
	2N1711	FA	npn, DP, si	3.0	0.0172	200	—	*130	*0.0003	*100	—	—	—
	2N1890	FA	npn, DP, si	3.0	0.0172	200	—	*200	*0.0003	*90	—	—	—
	2N1893	FA	npn, DP, si	3.0	0.0172	200	—	*80	*0.0003	*70	—	—	—
P 13	2N1893	PSI	npn, TP, D, si	3	0.017	200	120	80	0.001	190	—	—	—
	2N1893A	PSI	npn, TP, D, si	3	0.017	200	140	90	0.001	190	—	—	—
	2N1973	FA	npn, DP, si	3.0	0.0172	200	60	*135	*0.0003	*80	—	—	—
	2N1974	FA	npn, DP, si	3.0	0.0172	200	60	*70	*0.0003	*70	—	—	—
	2N1975	AMF	npn, DP, si	3.0	0.0172	200	60	*42	*0.0003	*60	—	—	—
	2N2049	FA	npn, DP, si	3.0	0.0172	200	—	3.0	*0.0003	—	—	—	—
	2N2224	BE	npn, PL, si	3	—	200	*40	*40-120	—	—	—	—	—
	2N2224	MO	npn, PE, si	3	17.1	200	*60	*40	*0.005	*400	—	0.8	—
	2N1506A	PSI	npn, TP, D, si	3.5	0.02	200	80	60	0.005	190	10	1.3	—
	2N1893	FA	npn, DP, si	3.0	0.0172	200	—	*80	*0.0003	*70	—	—	—
P 14	2N497	TI	npn, DJ, si	4.0	.023	200	60	12-36	10	9 mc	—	—	TR, FA, NA, BE, RCA
	2N498	TI	npn, DJ, si	4.0	.023	200	100	12-36	10	9 mc	—	—	TR, FA, NA, BE, RCA, GE
	2N656	TI	npn, DJ, si	4.0	.023	200	60	30-90	10	8 mc	—	—	TR, FA, NA, BE, RCA, GE
	2N657	TI	npn, DJ, si	4.0	.023	200	100	30-90	10	8 mc	—	—	TR
	2N657	FA	npn, DP, si	4.0	0.0228	200	—	*80	—	*60	—	—	—
	2N1479	RCA	npn, DJ, si	4	—	175	60	50	10	1.5 mc	—	—	TR
	2N1480	RCA	npn, DJ, si	4	—	175	100	50	10	1.5 mc	—	—	TR
	2N1481	RCA	npn, DJ, si	4	—	175	60	50	10	1.5 mc	—	—	TR
	2N1482	RCA	npn, DJ, si	4	—	175	100	50	10	1.5 mc	—	—	TR
	2N1615	TR	npn, ME, si	4	.023	200	*100	*25	*10	*25,000	—	—	—

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS						Remarks
					w/°C	T _i (°C)	V _{CEO} (v)	V _{CBO} (v)	I _c (a)	h _{FE} (*h _{FE})	I _{CO} (ma) (*I _{CO})	f _{ae} *f _T (kc)	Pow. Gain (db)	Pow. Out. (w)	
P 15	MHT-401	MH	npn, EP, si	4	0.023	200	*60	*120	0.5	20-120	0.001	80m	—	—	Vce (sat)=Iv
	MHT-402	MH	npn, EP, si	4	0.023	200	*120	*120	0.5	20-120	0.002	80m	—	—	Vce (sat)=Zv
	MM601	MO	npn, PE, si	4	26.7	175	*60	*60	—	*10	*0.5	*300	—	6	
	PT1588	PSI	npn, TPD, si	4	0.023	200	80	80	—	40	0.005	210	10	1	
	ST4341	TR	npn, ME, si	4	0.023	200	*80	*80	—	*15	*80	*15,000	—	—	
P 16	2N699B	FA	npn, BP, si	5.0	0.035	200	—	—	—	—	*0.0004	*100	—	—	PSI
	2N1067	STC	npn, DJ, si	5	28.5	175	60	60	0.5	35	5	1.5	—	—	RCA, AMF
	2N1700	RCA	npn, si	5	—	—	*60	*60	1.0	*20	—	—	—	—	TR
	2N2102	RCA	npn, TDP, si	5	—	—	120	120	1.0	35*	—	—	—	—	BE
	2N2270	RCA	npn, TDP, si	5	—	—	60	60	1.0	35*	—	—	—	—	BE
P 17	2N2297	FA	npn, DP, si	5.0	0.0286	200	—	—	—	*35	*0.0004	*90	—	—	
	2N121E	SY	npn, AJ, ge	6	0.1	85	*45	*45	2	40-100	3	7	—	—	
	2N2038	TR	npn, DJ, si	6	0.3	200	45	45	0.5	12-36	.001	—	—	—	
	2N2039	TR	npn, DJ, si	6	0.3	200	75	75	0.5	12-36	.001	—	—	—	
	2N2040	TR	npn, DJ, si	6	0.3	200	45	45	0.5	30-90	.001	—	—	—	
P 18	2N2041	TR	npn, DJ, si	6	0.3	200	75	75	0.5	30-90	.001	—	—	—	
	OC30	AMP	ppp, PAD, T, ge	6.7	75	75	*32	*32	1.4	35	.012	—	—	—	
	2N326	SY	npn, AJ, ge	7	0.11	85	*35	*35	2	45	3	150	—	—	
	7F1	GE	npn, UM, si	7	—	175	*80	*80	—	*12-36	*50	—	—	—	
	7F2	GE	npn, MS, si	7	—	175	*80	*80	—	*30-90	*50	—	—	—	
P 19	7F3	GE	npn, DM, si	7	—	175	*120	*120	—	*12-36	*50	—	—	—	
	7F4	GE	npn, DM, si	7	—	175	*120	*120	—	*30-90	0.100	—	—	—	driver
	2N1172	DE	ppp, AJ, ge	7.5	1.1	100	*40	*40	1.5	20	.03	500	34	—	
	2N1183	RCA	ppp, AJ, ge	7.5	—	100	45	45	3	20	.03	500	—	—	
	2N1183A	RCA	ppp, AJ, ge	7.5	—	100	60	60	3	20	.03	500	—	—	
P 20	2N1183B	RCA	ppp, AJ, ge	7.5	—	100	80	80	3	20	.03	500	—	—	
	2N1184	RCA	ppp, AJ, ge	7.5	—	100	45	45	3	40	.03	500	—	—	
	2N1184A	RCA	ppp, AJ, ge	7.5	—	100	60	60	3	40	.03	500	—	—	
	2N1184B	RCA	ppp, AJ, ge	7.5	—	100	80	80	3	40	.03	500	—	—	
	2N1609	DE	ppp, AJ, ge	7.5	10.0	100	60	60	1.5	*30/75	100	15	32	—	
P 21	2N1610	DE	ppp, AJ, ge	7.5	10.0	100	60	60	1.5	*50/125	100	15	32	—	
	2N1610	KF	ppp, AJ, ge	7.5	1.1	100	*80	*80	1.5	*35	*20	—	—	—	
	2N1612	KF	ppp, AJ, ge	7.5	1.1	100	*60	*60	1.5	*35	*20	—	—	—	
	2N2403	NA	npn, si	8	0.045	200	60	60	1	20-60	0.001	200mc	12	1.2	
	2N2404	NA	npn, si	8	0.045	200	60	60	1	40-120	0.001	200mc	12	1.2	
P 22	2N2485	CS	npn, MS, si	8.7	.05	200	120	120	1	*10	*500	*250	7	5	
	2N2486	CS	npn, MS, si	8.7	.05	200	140	140	1	*10	*500	*250	5	3	
	2N2489	CS	npn, MS, si	8.7	.05	200	65	65	1	*10	*500	*250	5	2	
	2N2500	CS	npn, MS, si	8.7	.05	200	140	140	1	*10	*500	*250	6.5	4.5	
	2N122	TI	npn, GR, si	8.75	.070	150	120	120	140	3	10	1	28	—	
P 23	2N176	SY	ppp, AJ, ge	10	0.15	90	*30	*30	3	4.5	0.3	—	35.5	—	RCA, MO, BE
	2N350	SY	ppp, AJ, ge	10	0.13	100	*40	*40	3	40	—	5	32	—	MO, BE
	2N351	RCA	ppp, AJ, ge	10	1	90	40	40	3	65	3	—	33.5	4	MO, SY, BE
	2N376	RCA	ppp, AJ, ge	10	1	90	40	40	3	78	3	—	35	4	MO, BE
	2N689	MO	ppp, AJ, ge	10	1.5	90	30	30	3	90	0.3	5	40	2	BE, CL
P 24	2N1068	IND	npn, AJ, si	10	0.133	175	60	60	1.5	38	0.5	—	—	—	STC, RCA, AMF, BE
	2N1714	TI	npn, MS, si	10	0.134	175	60	60	1	—	.002	20 mc	—	—	
	2N1715	TI	npn, MS, si	10	0.134	175	100	100	1	—	.002	20 mc	—	—	
	2N1716	TI	npn, MS, si	10	0.134	175	60	60	1	—	.002	20 mc	—	—	
	2N1717	TI	npn, MS, si	10	0.134	175	100	100	1	—	.002	20 mc	—	—	RA
P 25	2N1718	TI	npn, MS, si	10	0.134	175	60	60	1	—	.002	20 mc	—	—	RA
	2N1719	TI	npn, MS, si	10	0.134	175	100	100	1	—	.002	20 mc	—	—	RA
	2N1720	TI	npn, MS, si	10	0.134	175	60	60	1	—	.002	20 mc	—	—	RA
	2N1721	TI	npn, MS, si	10	0.134	175	100	100	1	—	.002	20 mc	—	—	
	2N1755	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	.002	20 mc	30-75	—	
P 26	2N1756	CL	ppp, AJ, ge	10	2.5	95	*60	*60	3	—	7	15	30-75	—	
	2N1757	CL	ppp, AJ, ge	10	2.5	95	*80	*80	3	—	7	15	30-75	—	
	2N1758	CL	ppp, AJ, ge	10	2.5	95	*100	*100	3	—	7	15	30-75	—	
	2N1759	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	7	10	60-150	—	
	2N1760	CL	ppp, AJ, ge	10	2.5	95	*60	*60	3	—	7	10	60-150	—	
P 27	2N1761	CL	ppp, AJ, ge	10	2.5	95	*80	*80	3	—	7	6	60-150	—	
	2N1762	CL	ppp, AJ, ge	10	2.5	95	*100	*100	3	—	7	6	60-150	—	
	2N1763	CL	ppp, AJ, ge	10	1.5	95	*40	*40	5	—	15	5	40-120	—	
	2N1764	CL	ppp, AJ, ge	10	1.5	95	*60	*60	5	—	15	5	40-120	—	
	2N1765	CL	ppp, AJ, ge	10	1.5	95	*80	*80	5	—	15	5	40-120	—	
P 28	2N1766	CL	ppp, AJ, ge	10	1.5	95	*100	*100	5	—	15	5	40-120	—	
	2N1767	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	3	7	28-39	—	
	2N1768	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	3	7	28-39	—	
	2N1769	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	3	7	28-39	—	
	2N1770	CL	ppp, AJ, ge	10	2.5	95	*40	*40	3	—	3	7	28-39	—	

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS						Remarks
					w/°C	T _i (°C)	V _{CEO} CBO (v)	I _c (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	f _{ae} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)		
P 22	CST1743	CL	pnnp,AJ,ge	10	2.5	95	*40	3	—	3	7	36-39	—	Vce (sat)=1 v	
	CST-1744	CL	pnnp,AJ,ge	10	2.5	95	*80	3	—	3	7	28-37	—		
	CST1745	CL	pnnp,AJ,ge	10	2.5	95	*80	3	—	3	7	28-33	—		
	CST1746	CL	pnnp,AJ,ge	10	2.5	95	*80	3	—	3	7	32-37	—		
	CTP1104	CL	pnnp,AJ,ge	10	2.0	85	40	3	—	2	4	28	1.2		
	CTP1105	CL	pnnp,AJ,ge	10	2.0	85	40	3	—	2	5	30	1.2		
	CTP1108	CL	pnnp,AJ,ge	10	2.0	85	20	3	—	2	4	27	0.6		
	CTP1109	CL	pnnp,AJ,ge	10	2.0	90	20	3	—	2	6	35	0.6		
	CTP1111	CL	pnnp,AJ,ge	10	2.0	90	80	3	—	5	4	29	1.2		
	MHT-4501	MH	npn,EP,si	10	0.057	200	*60	1	20-120	0.001	80m	—	—		—
P 23	MHT-4502	MH	npn,EP,si	10	0.057	200	*120	1	20-120	0.002	80m	—	—	Vce (sat)=2 v BE	
	2N301	RCA	pnnp,AJ,ge	11	—	91	40	3	70	0.1	—	—	—		
	2N1314	AMP	pnnp,PAOT,ge	11	—	90	*32	3.5	33	<0.1	150	—	—	CL, RCA, BE	
	2N301A	SY	pnnp,AJ,ge	12	0.2	85	*60	2	—	5	35	—	—		
	2N1666	AMP	pnnp,PAOT,ge	13	—	90	*80	6	32	<100	200	—	—	hi freq., hi pwr. hi freq., hi pwr.	
	2N1709	PSI	npn,DM,si	13	86.7	175	75	1.2a	—	10max	240mc	10 db	—		
	2N1710	PSI	npn,DM,si	13	86.7	175	60	1.2a	—	10max	30	8 db	—		
	2N2781	PSI	npn,TDP,si	13	.087	175	75	2	30	.5	210	5	3.2		
	2N2782	PSI	npn,TDP,si	13	.087	175	100	2	30	.5	210	5	3.2		
	2N2783	PSI	npn,TDP,si	13	.087	175	100	2	30	.1	210	5	3.5		
P 24	PT531	PSI	npn,TDP,si	13	.087	175	75	2	30	.1	210	10	3.0	2N234A	
	PT612	PSI	npn,TDP,si	13	.087	175	75	2	30	.5	210	10	5		
	2N307	BE	pnnp,AJ,ge	15	2.0	75	35	1.0	—	.35	—	—	—		
	2N1658	MH	pnnp,AJ,ge	15	0.2	100	*80	1	30-90	0.5	700	—	—		
	2N1659	MH	pnnp,AJ,ge	15	0.2	100	*60	1	30-90	0.5	700	—	—		
	2N2196	GE	npn,MS,si	15	—	175	80	—	30	75μa	15	—	—		
	2N2197	GE	npn,MS,si	15	—	175	80	30	*75	15	—	—	—		
	2N2201	GE	npn,DM,si	15	—	175	*120	—	*30-90	*50	—	—	—		
	2N2202	GE	npn,DM,si	15	—	175	*120	—	*30-90	*50	—	—	—		
	2N2203	GE	npn,DM,si	15	—	175	*120	—	*30-90	*50	—	—	—		
P 25	2N2204	GE	npn,DM,si	15	—	175	*120	—	*30-90	*50	—	—	—		
	2N2611	GE	npn,DM,si	15	—	175	*120	—	*12-36	*50	—	—	—		
	7B1	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7B2	GE	npn,DM,si	15	—	175	*80	—	*30-90	*50	—	—	—		
	7B3	GE	npn,MS,si	15	—	175	120	—	12	50	15	—	—		
	7C1	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7C2	GE	npn,DM,si	15	—	175	*80	—	*30-90	*50	—	—	—		
	7C3	GE	npn,DM,si	15	—	175	*120	—	*12-36	*50	—	—	—		
	7D1	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7D2	GE	npn,DM,si	15	—	175	*80	—	*30-90	*50	—	—	—		
P 26	7D3	GE	npn,DM,si	15	—	175	*120	—	*12-36	*50	—	—	—	BE	
	7E1	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7E2	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7E3	GE	npn,DM,si	15	—	175	*120	—	*12-36	*50	—	—	—		
	7G1	GE	npn,DM,si	15	—	175	*80	—	*12-36	*50	—	—	—		
	7G2	GE	npn,DM,si	15	—	175	*80	—	*30-90	*50	—	—	—		
	7G3	GE	npn,DM,si	15	—	175	*120	—	*12-36	*50	—	—	—		
	7G4	GE	npn,DM,si	15	—	175	*120	—	*30-90	*50	—	—	—		
	2N307A	SY	pnnp,AJ,ge	17	0.34	75	*35	2	25	—	5	33	—		
	SN230	CS	npn,MS,si	18	.12	175	65	2	*10	*500	*250	5.7	7.5		
P 27	SN231	CS	npn,MS,si	18	.12	175	140	2	*10	*500	*250	8.5	14	BE KF KF 2N234A 2N234A	
	SN232	CS	npn,MS,si	18	.12	175	65	2	*10	*500	*250	4	5		
	SN234	CS	npn,MS,si	18	.12	175	140	2	*10	*500	*250	6	8		
	2N155	CL	pnnp,AJ,ge	20	.33	85	*30	3	20	2	5	—	2		
	2N156	RA	pnnp,AJ,ge	20	0.33	85	30	3	20	1	5	—	2		
	2N158	RA	pnnp,AJ,ge	20	0.33	85	60	3	20	1	5	—	2		
	2N158A	RA	pnnp,AJ,ge	20	0.33	85	80	3	20	1	5	—	2		
	2N255	BE	pnnp,AJ,ge	20	2.0	85	15	3	—	1.0	—	—	19-26		
	2N255A	BE	pnnp,AJ,ge	20	0.5	85	15	3	—	1.0	5	25	2		
	2N256	BE	pnnp,AJ,ge	20	2.0	85	30	3	—	1.0	—	—	22-29		
P 28	2N256A	BE	pnnp,AJ,ge	20	0.5	85	25	3	—	1	5	25	2	BE, KF BE, KF BE, KF BE, KF TO-10 TO-13	
	2N401	BE	pnnp,AJ,ge	20	1.2	90	40	3	—	1.3	—	30	5		
	2N1042	TI	pnnp,AJ,ge	20	.27	100	40	3	20-60	0.75	—	—	—		
	2N1043	TI	pnnp,AJ,ge	20	.27	100	60	3	20-60	0.75	—	—	—		
	2N1044	TI	pnnp,AJ,ge	20	.27	100	80	3	20-60	0.75	—	—	—		
	2N1045	TI	pnnp,AJ,ge	20	.27	100	100	3	20-60	0.75	—	—	—		
	2N1294	SY	npn,AJ,ge	20	0.33	85	*60	3	30min	0.5	5	—	2		
	2N1295	SY	pnnp,AJ,ge	20	0.33	85	*80	3	30min	0.5	5	—	2		
	2N1326	KF	pnnp,AJ,ge	20	0.33	85	100	3	30min	0.5	5	—	2		
	2N1437	KF	pnnp,AJ,ge	20	0.33	85	100	3	20min	0.5	5	—	2		

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS			CHARACTERISTICS						Remarks
					T _j (°C)	V _{CEO} +V _{CB0} (v)	I _c (a)	h _{FE}	I _{CO} (ma)	f _{oe} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)		
P 29	2N1438	KF	pn-p, A ₁ ge	20	0.33	85	100	3	20min	0.5	5	—	2	TO-10
	2N1465	KF	pn-p, A ₁ ge	20	0.33	85	120	3	20min	0.5	5	—	2	TO-13
	2N1466	KF	pn-p, A ₁ ge	20	0.33	85	80	3	20min	0.5	5	—	2	TO-10
	2N1504	KF	pn-p, A ₁ ge	20	0.33	85	80	3	20min	0.5	5	—	—	
	2N2552	KF	pn-p, A ₁ ge	20	.27	100	*40	1	*33	*40	10	—	—	
	2N2553	KF	pn-p, A ₁ ge	20	.27	100	*60	1	*33	*40	10	—	—	
	2N2554	KF	pn-p, A ₁ ge	20	.27	100	*80	1	*33	*40	10	—	—	
	2N2555	KF	pn-p, A ₁ ge	20	.27	100	*100	1	*33	*40	10	—	—	
P 30	2N2556	KF	pn-p, A ₁ ge	20	.27	100	*60	1	*33	*40	10	—	—	
	2N2557	KF	pn-p, A ₁ ge	20	.27	100	*60	1	*33	*40	10	—	—	
	2N2558	KF	pn-p, A ₁ ge	20	.27	100	*80	1	*33	*40	10	—	—	
	2N2559	KF	pn-p, A ₁ ge	20	.27	100	*100	1	*33	*40	10	—	—	
	2N2560	KF	pn-p, A ₁ ge	20	.27	100	*40	3	*25	*40	10	—	—	
	2N2561	KF	pn-p, A ₁ ge	20	.27	100	*60	3	*25	*40	10	—	—	
	2N2562	KF	pn-p, A ₁ ge	20	.27	100	*80	3	*25	*40	10	—	—	
	2N2563	KF	pn-p, A ₁ ge	20	.27	100	*100	3	*25	*40	10	—	—	
P 31	CDT1319	CL	pn-p, A ₁ ge	20	1.5	100	*40	5	20-60	15	5	—	—	
	CDT1320	CL	pn-p, A ₁ ge	20	1.5	100	*60	5	20-60	15	5	—	—	
	CDT1321	CL	pn-p, A ₁ ge	20	1.5	100	*80	5	20-60	15	5	—	—	
	CDT1322	CL	pn-p, A ₁ ge	20	1.5	*100	100	5	20-60	15	5	—	—	
	CK 31	RA	pn-p, A ₁ ge	20	0.33	85	80	3	—	1	5	—	—	
	CK-312	RA	pn-p, A ₁ ge	20	0.33	85	100	3	—	1	5	—	—	
	CK-313	RA	pn-p, A ₁ ge	20	0.33	85	120	3	—	1	5	—	—	
	CK-314	RA	pn-p, A ₁ ge	20	0.33	85	150	3	—	1	5	—	—	
P 32	CK-315	RA	pn-p, A ₁ ge	20	0.33	85	200	3	—	1	5	—	—	
	MM799	MO	np-n, P-E, si	20	133	175	*60	—	*10	*0.5	*200	—	12	
	2N2344A	BE	pn-p, A ₁ ge	25	1.2	90	30	3	—	1	—	—	34	CL
	2N2354A	BE	pn-p, A ₁ ge	25	1.2	90	40	3	—	1.0	—	—	36	CL
	2N2358	BE	pn-p, A ₁ ge	25	1.2	90	40	3	—	1.0	—	—	38	CL
	2N236A	BE	pn-p, A ₁ ge	25	1.2	95	40	3	—	1.0	—	—	35	CL
	2N285A	BE	pn-p, A ₁ ge	25	1.2	95	40	3	—	1.0	—	—	39	hFE 20 min., CL
	2N286	SY	pn-p, A ₁ ge	25	0.33	100	*60	2	20	2.0	4	—	—	BE
P 33	2N399	BE	pn-p, A ₁ ge	25	1.2	90	40	3	—	1.5	—	—	—	
	2N400	BE	pn-p, A ₁ ge	25	1.2	95	40	3	—	1.3	—	—	6	BE
	2N1146	CL	pn-p, A ₁ ge	25	0.7	95	*40	15	—	25	4	—	—	BE
	2N1146A	CL	pn-p, A ₁ ge	25	0.7	95	*60	15	—	25	4	—	—	BE
	2N1146B	CL	pn-p, A ₁ ge	25	0.7	95	*80	15	—	25	4	—	—	BE
	2N1146C	CL	pn-p, A ₁ ge	25	0.7	95	*100	15	—	25	4	—	—	BE
	2N1147	CL	pn-p, A ₁ ge	25	0.7	95	*40	15	—	25	4	—	—	solder lugs, BE
	2N1147A	CL	pn-p, A ₁ ge	25	—	95	*60	15	—	25	4	—	—	solder lugs, BE
P 34	2N1147B	CL	pn-p, A ₁ ge	25	—	95	*80	15	—	25	4	—	—	solder lugs, BE
	2N1147C	CL	pn-p, A ₁ ge	25	—	95	*100	15	—	25	4	—	—	solder lugs, BE
	2N1483	RCA	np-n, D ₁ si	25	—	200	60	3	45	1.25mc	—	—	—	STC, AMF
	2N1484	RCA	np-n, D ₁ si	25	—	200	100	3	45	1.25mc	—	—	—	STC, AMF
	2N1485	RCA	np-n, D ₁ si	25	—	200	60	3	45	1.25mc	—	—	—	STC, AMF
	2N1486	RCA	np-n, D ₁ si	25	—	200	100	3	45	1.25mc	—	—	—	STC, AMF
	B-177	BE	pn-p, A ₁ ge	25	1.2	90	30	3	—	1.0	—	—	—	
	B-178	BE	pn-p, A ₁ ge	25	1.2	90	30	3	—	1.0	—	—	—	
P 35	B-179	BE	pn-p, A ₁ ge	25	1.2	90	40	3	—	1.0	—	—	—	
	CTP1500	CL	pn-p, A ₁ ge	25	1.0	95	100	15	30-75	8	—	—	—	
	CTP1503	CL	pn-p, A ₁ ge	25	1.0	95	80	15	30-75	8	—	—	—	
	CTP1504	CL	pn-p, A ₁ ge	25	1.0	95	60	15	30-75	8	—	—	—	
	CTP1508	CL	pn-p, A ₁ ge	25	1.0	95	40	15	30-75	8	—	—	—	
	CTP1544	CL	pn-p, A ₁ ge	25	1.0	95	60	25	25-75	15	3	—	—	
	CTP1545	CL	pn-p, A ₁ ge	25	1.0	95	80	25	25-75	15	3	—	—	
	CTP1552	CL	pn-p, A ₁ ge	25	1.0	95	40	25	25-75	15	3	—	—	
P 35	CTP1553	MO	np-n, P-E, si	25	1.0	95	100	25	25-75	15	3	—	—	
	MM800	BE	pn-p, A ₁ ge	30	167	175	*60	3	*10	*0.5	*200	—	17	CL
	2N236B	BE	pn-p, A ₁ ge	30	85	40	*45	2.0	—	3.0	37	—	4	CL, BE, TS, 30
	2N242	SY	pn-p, A ₁ ge	30	0.33	100	*45	2.0	—	3.0	36	—	—	
	2N257	BE	pn-p, A ₁ ge	30	2.0	90	40	3	—	—	—	—	33	CL
	2N268	BE	pn-p, A ₁ ge	30	2.0	90	—	2	—	—	—	—	35	SY, CL
	ST7530	TR	np-n, ME, si	30	150	40	*20	5	*8,000	—	—	—	—	
	ST7120	TR	np-n, ME, si	30	160	40	*20	5	*8,000	—	—	—	—	
P 35	ST7130	TR	np-n, ME, si	30	160	40	*45	5	*20	—	—	—	—	
	2N538	MH	pn-p, A ₁ ge	32	0.45	100	*80	3	20-50	400	—	—	—	KF
	2N539	MH	pn-p, A ₁ ge	32	0.45	100	*80	3.0	30-75	2	400	—	—	(MH, JAN2N 539), KF
	2N540	MH	pn-p, A ₁ ge	32	0.45	100	*80	3.0	45-113	2	400	—	—	KF
	2N1202	MH	pn-p, A ₁ ge	32	0.45	100	*80	3	40-120	2	400	—	—	KF
	2N1203	MH	pn-p, A ₁ ge	32	0.45	100	*120	3	25-75	2	400	—	—	KF

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS			CHARACTERISTICS					Remarks
					T _j (°C)	V _{CEO} (v)	I _c (a)	f _{hfe} *h _{FE}	I _{CO} (μA)	f _{ae} *f _T (kc)	Pow _r Gain (db)	Pow _r Out. (w)	
P 36	2N1261	MH	pn _p ,A _J ,ge	32	0.45	*80	3	20-50	2	400	—	—	KF
	2N1262	MH	pn _p ,A _J ,ge	32	0.45	*80	3	30-75	2	400	—	—	KF
	2N1263	MH	pn _p ,A _J ,ge	32	0.45	*80	3	45-113	2	400	—	—	KF
	2N1501	MH	pn _p ,A _J ,ge	32	0.45	*60	3	25-100	2	400	—	—	KF
	2N1502	MH	pn _p ,A _J ,ge	32	0.45	*40	3	25-100	2	400	—	—	KF
	CA202	MH	pn _p ,A _J ,ge	32	0.45	20	3	*20	4	400	—	—	MO
	2N463	WE	pn _p ,A _J ,ge	35	—	60	5	60	0.1	4	—	—	MO
P 37	2N1011	BE	pn _p ,A _J ,ge	35	0.2	*80	3	30-75	15	—	25	—	—
	2N256	DE	pn _p ,A _J ,ge	37	2.0	*30	3	—	3	5	—	—	—
	2N307	DE	pn _p ,A _J ,ge	37	2.0	*35	3	*20	15	3	—	—	—
	2N663	DE	pn _p ,A _J ,ge	37	2.0	*50	4	*25/75	4	15	—	—	—
	2N178	MO	pn _p ,A _J ,ge	40	1.4	*40	3	50	—	6	30	—	BE
	2N554	MO	pn _p ,A _J ,ge	40	1.4	*15	3	50	—	6	35	—	TR, TI, BE
	2N555	MO	pn _p ,A _J ,ge	40	1.4	*30	3	50	—	6	—	—	—
P 38	2N1047	STC	pn _p ,A _J ,si	40	0.2	80	2	12-36	.015	—	—	—	TR, BE
	2N1047A	TI	np _n ,MS,si	40	.228	80	0.5	12-36	.0015	8 mc	—	—	BE
	2N1047B	TI	np _n ,DM,si	40	—	80	0.75	12-36*	.0015	90	—	—	TR, TI, BE
	2N1047C	BE	np _n ,DM,si	40	—	80	8	*12-36	.015	—	—	—	TR, TI, BE
	2N1048	STC	np _n ,DJ,si	40	0.2	120	2	12-36	.015	—	—	—	TR, STC, BE
	2N1048A	TI	np _n ,MS,si	40	.228	120	0.5	12-36	.0015	8 mc	—	—	STC, BE
	2N1048B	TI	np _n ,DM,si	40	—	120	0.75	30*-90*	—	—	—	—	TR, TI, BE
P 39	2N1048C	BE	np _n ,DM,si	40	0.2	120	2	30-90	.015	7 mc	—	—	TR, STC, BE
	2N1049	STC	np _n ,DJ,si	40	.228	80	0.5	30-90	.0015	—	—	—	BE
	2N1049A	TI	np _n ,MS,si	40	—	80	—	—	—	—	—	—	BE
	2N1049B	STC	np _n ,D,si	40	—	80	—	—	—	—	—	—	TI
	2N1049C	BE	np _n ,DM,si	40	—	80	8	*30-90	—	—	—	—	STC
	2N1050	STC	np _n ,DJ,si	40	0.2	120	5	30-90	.015	—	—	—	TR, TI, BE
	2N1050A	TI	np _n ,MS,si	40	.228	120	0.75	30*-90*	—	—	—	—	TR, STC, BE
P 40	2N1050B	TI	np _n ,DM,si	40	—	120	8	*30-90	—	—	—	—	STC, BE
	2N1050C	BE	np _n ,DM,si	40	—	120	8	30*-90*	—	—	—	—	BE
	2N1647	TR	np _n ,DJ,si	40	.27	*80	3	15-45	.025	10 mc	—	—	BE
	2N1648	TR	np _n ,DJ,si	40	.27	*120	3	15-45	.025	10 mc	—	—	BE
	2N1649	TR	np _n ,DJ,si	40	.27	*80	3	30-90	.025	10 mc	—	—	BE
	2N1650	TR	np _n ,DJ,si	40	.27	*120	3	30-90	.025	10 mc	—	—	TI
	2N1650	STC	np _n ,D,si	40	—	80	—	—	—	—	—	—	STC
P 41	2N1691	TI	np _n ,DM,si	40	—	120	0.5	*20*-60	.35	8 mc	—	—	—
	2N1886	TR	np _n ,DJ,si	40	.27	60	5	20-80	.01	10 mc	—	—	—
	2N2018	TR	np _n ,DJ,si	40	.27	*150	—	20-60	.01	10 mc	—	—	—
	2N2019	TR	np _n ,DJ,si	40	.27	*200	—	20-60	.01	10 mc	—	—	—
	2N2020	TR	np _n ,DJ,si	40	.27	*150	—	40-120	.01	10 mc	—	—	—
	2N2021	TR	np _n ,DJ,si	40	.27	*200	—	40-120	.01	10 mc	—	—	Planar
	MHT-6001	MH	np _n ,DP,si	40	—	100	3	10-120	0.001	30 mc	—	—	MO
P 42	2N1120	BE	pn _p ,A _J ,ge	45	1.0	*80	15	20-50	15	—	30	—	CL, BE
	2N250	TI	pn _p ,A _J ,ge	50	.27	30	5	60	2	—	30	—	BE, CL
	2N251	TI	pn _p ,A _J ,ge	50	.27	60	5	60	2	—	30	—	—
	2N553	DE	pn _p ,A _J ,ge	50	1.5	*80	5	—	0.02	25	—	—	BE
	2N665	DE	pn _p ,A _J ,ge	50	1.5	*80	5	—	0.02	25	—	—	JAN2N665
	2N1014	RCA	pn _p ,A _J ,ge	50	1.0	100	10	75	0.1	1	—	—	RCA, AMF, FT, BE
	2N1069	STC	np _n ,DJ,si	50	.29	60	4	20	1	1	—	—	RCA, AMF, FT, BE
P 43	2N1070	STC	np _n ,DJ,si	50	.29	60	4	20	1	1	—	—	—
	2N1722	TI	np _n ,MS,si	50	.67	80	7.5	—	1	20 mc	—	—	STC
	2N1724	TI	np _n ,MS,si	50	.67	80	7.5	—	1	20 mc	—	—	—
	2N1905	RCA	pn _p ,Dr,ge	50	0.7	60	10	90	.15	—	—	—	—
	2N1906	RCA	pn _p ,Dr,ge	50	0.7	100	10	125	.15	—	—	—	—
	2N2266	MH	pn _p ,A _J ,ge	50	0.5	*100	5.0	25-75	2	400	—	—	—
	2N2267	MH	pn _p ,A _J ,ge	50	0.5	*120	5.0	25-75	2	400	—	—	—
P 44	2N1722	TR	np _n ,PL,si	50	500	80	7.5	*20	—	*10,000	15	60	—
	2N1724	TR	np _n ,PL,si	50	500	80	7.5	*20	—	*10,000	15	60	—
	2N1704	NA	np _n ,si	50-200	500	80	7.5	*20	0.1	10	—	—	—
	2N1657	RA	np _n ,DB,si	55	.33	200	2	50	10	10 mc	—	—	—
	2N419	BE	pn _p ,A _J ,ge	60	1.2	45	3	—	0.5	—	—	—	CL
	2N639	BE	pn _p ,A _J ,ge	60	1.2	100	45	5	15-30	1.0	—	—	CL
	2N639A	BE	pn _p ,A _J ,ge	60	1.2	100	70	5	15-30	1.0	—	—	CL
P 45	2N639B	BE	pn _p ,A _J ,ge	60	1.2	100	80	5	15-30	2.2	—	—	—
	2N1073	BE	pn _p ,A _J ,ge	60	1.0	100	10	20-6	2.0	1.5	—	—	—
	2N1073A	BE	pn _p ,A _J ,ge	60	1.0	100	10	20-6	1.5	—	—	—	DE
	2N1073B	BE	pn _p ,A _J ,ge	60	1.0	100	120	10	20-6	2.0	—	—	CL
	2N1136	BE	pn _p ,A _J ,ge	60	1.2	100	6	—	0.5	—	—	—	CL
	2N1136A	BE	pn _p ,A _J ,ge	60	1.2	100	6	—	2	—	—	—	CL
	2N1136B	BE	pn _p ,A _J ,ge	60	1.2	100	6	—	2	—	—	—	CL


SILICON PLANAR POWER TRANSISTORS

PNP 2N2875

Features remarkably high beta linearity over wide range of collector currents. Dissipates up to 15 Watts of power at 100°C case.

Type	DC Current Gain @ $I_c = 500\text{mA}$ (β)	Typical Collector Saturation Voltage @ $I_c = 500\text{mA}$ (Volts)	Minimum Sustaining Voltage @ $I_c = 50\text{mA}$ (Volts)	Typical Cut-Off Frequency @ $I_c = 100\text{mA}$ (Mc)	Power Dissipation Rating @ 100°C Case (Watts)
2N2875	20-60	1.0	50	30	15

IN A
 $\frac{1}{16}$ " STUD-
MOUNTED
PACKAGE



NPN 2N2866-7

Features extremely low RCS of 0.75 Ohms Max. Dissipates up to 20 Watts of power at 100°C case. High beta linearity.

Type	DC Current Gain @ $I_c = 500\text{mA}$ (β)	Typical Collector Saturation Voltage @ $I_c = 1\text{Amp}$ (Volts)	Minimum Sustaining Voltage @ $I_c = 50\text{mA}$ (Volts)	Typical Cut-Off Frequency @ $I_c = 100\text{mA}$ (Mc)	Power Dissipation Rating @ 100°C Case (Watts)
2N2866	20-60	0.4	80	15	20
2N2867	40-120	0.4	80	15	20

TRANSITRON'S NEW STATE-OF-THE-ART SILICON PLANAR TRANSISTORS FEATURE GREATER RELIABILITY, LOWER RCS, AND PERMIT FURTHER CIRCUIT SIMPLIFICATION IN DEMANDING POWER CATEGORIES.

Drawing heavily upon its broad experience in silicon power transistor development and stud-mounted packaging, Transitron introduces its new PNP 2N2875 and NPN 2N2866-7 intermediate power silicon transistors. They combine all the recognized advantages of planar construction with the efficiency of $\frac{1}{16}$ " hex base stud-mounted packaging, which solves a variety of annoying mounting problems. And, because they complement each other, extensive circuit simplification is now practical within power applications.

These highly reliable silicon planar power transistors are the product of the

same intensive Transitron Total Reliability Program that produced the popular $\frac{1}{16}$ " NPN 2N1647-50 and 2N2018-21 series for modern military ICBM systems. Continuous lot control from ingot stage, thorough product improvement documentation, and comprehensive failure analysis have enabled Transitron Product Engineering to develop units which will satisfy the strictest requirements.

The 2N2875 and the 2N2866-7, and other complementing PNP and NPN silicon power transistors, are available through your Transitron Distributor.


For complete information, write Transitron's Wakefield, Mass. installation.

Transitron 
electronic corporation
wakefield, melrose, boston, mass.

SALES OFFICES IN PRINCIPAL CITIES THROUGHOUT THE U. S. A. AND EUROPE • CABLE ADDRESS: TRELCO

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS			CHARACTERISTICS						Remarks
					w/°C	T _i (°C)	V _{CEO} +V _{CB0} (v)	I _c (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	f _{oe} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)	
P 43	2N1137	BE	ppn,AJ,ge	60	1.2	100	40	6	—	0.5	—	—	—	CL
	2N1137A	BE	ppn,AJ,ge	60	1.2	100	70	6	—	2	—	—	—	CL
	2N1137B	BE	ppn,AJ,ge	60	1.2	100	80	6	—	2	—	—	—	CL
	2N1138	BE	ppn,AJ,ge	60	1.2	100	40	6	—	0.5	—	—	—	CL
	2N1138A	BE	ppn,AJ,ge	60	1.2	100	70	6	—	2.0	—	—	—	CL
	2N1138B	BE	ppn,AJ,ge	60	1.2	100	80	6	—	2	—	—	—	CL
P 44	2N1210	TR	npn,DJ,si	60	.27	175	*60	5	15-75	50	15 mc	—	—	STC, FN, FT
	2N1211	TR	npn,DJ,si	60	.27	175	*80	5	15-75	50	15 mc	—	—	STC, FN, FT
	2N1487	RCA	npn,DJ,si	60	—	175	60	6	30	25	1 mc	—	—	STC, FT, AMF, BE
	2N1488	RCA	npn,DJ,si	60	—	175	100	6	30	25	1 mc	—	—	STC, FT, AMF, BE
	2N1489	RCA	npn,DJ,si	60	—	175	60	6	30	25	1 mc	—	—	STC, FT, AMF, BE
	2N1490	RCA	npn,DJ,si	60	—	175	100	6	30	25	1.25mc	—	—	STC, FT, AMF, BE
P 45	2N1616	TR	npn,DJ,si	60	.27	175	60	5	15-75	50	15 mc	—	—	AMF, FT, STC, BE
	2N1617	TR	npn,DJ,si	60	.27	175	70	5	15-75	50	15 mc	—	—	AMF, FT, STC, BE
	2N1618	TR	npn,DJ,si	60	.27	175	80	5	15-75	50	15 mc	—	—	AMF, FT, STC, BE
	ST440	TR	npn,DJ,si	60	.27	150	60	5	10	1	—	—	—	STC
	2T450	TR	npn,DJ,si	60	.27	150	*60	5	10	1	—	—	—	STC
	2N2137	MO	ppn,AJ,ge	62.5	0.83	100	30	3	30-60	2	20	—	—	"Meg-A-Life"
P 46	2N2137A	MO	ppn,AJ,ge	62.5	0.83	100	30	3	30-60	2	20	—	—	"Meg-A-Life"
	2N2138	MO	ppn,AJ,ge	62.5	0.83	100	45	3	30-60	2	20	—	—	"Meg-A-Life"
	2N2139	MO	ppn,AJ,ge	62.5	0.83	100	60	30	30-60	2	20	—	—	"Meg-A-Life"
	2N2140	MO	ppn,AJ,ge	62.5	0.83	100	75	3	30-60	2	20	—	—	"Meg-A-Life"
	2N2141	MO	ppn,AJ,ge	62.5	0.83	100	90	3	30-60	2	20	—	—	"Meg-A-Life"
	2N2142	MO	ppn,AJ,ge	62.5	0.83	100	30	3	50-100	2	20	—	—	"Meg-A-Life"
P 47	2N2143	MO	ppn,AJ,ge	62.5	0.83	100	45	3	50-100	2	20	—	—	"Meg-A-Life"
	2N2144	MO	ppn,AJ,ge	62.5	0.83	100	60	3	50-100	2	20	—	—	"Meg-A-Life"
	2N2145	MO	ppn,AJ,ge	62.5	0.83	100	75	3	50-100	2	20	—	—	"Meg-A-Life"
	2N2146	MO	ppn,AJ,ge	62.5	0.83	100	90	3	50-100	2	20	—	—	"Meg-A-Life"
	2N301	DE	ppn,A,ge	75	1.0	100	*40	3	*62.5	3	5	—	—	"Meg-A-Life"
	2N301A	DE	ppn,A,ge	75	1.0	100	*60	3	*62.5	3	5	—	—	"Meg-A-Life"
P 48	2N174A	TS	npn,AJ,ge	75-95	—	95	*80	15	*37	8	10	—	—	MO, SO, DE
	2N1511	RCA	npn,si	75	—	—	60	6	15*	—	—	—	—	STC
	2N1512	RCA	npn,si	75	—	—	100	6	15	—	—	—	—	STC
	2N1513	RCA	npn,si	75	—	—	60	6	*25	—	—	—	—	STC
	2N1514	RCA	npn,si	75	—	—	100	6	*25	—	—	—	—	STC
	2N1703	RCA	npn,si	75	—	—	60	5	*15	—	—	—	—	STC
P 49	2N2101	AMF	ppn,MESA,si	75	0.5	200	*60	3.0	15-60	*1	1.5mc	—	—	STC, TR, RA, FT, AMF, BE
	3N45	MH	ppn,AJ,ge	75	1.0	100	*80	12	30-120	3.0	750	—	—	STC, TR, RA, AMF, FT, BE
	3N46	MH	ppn,AJ,ge	75	1.0	100	*80	12	20-80	3.0	450	—	—	AMF, BE
	3N47	MH	ppn,AJ,ge	75	1.0	100	*40	12	30-120	3	750	—	—	STC, TR, RA, FN, FT
	3N48	MH	ppn,AJ,ge	75	1.0	100	*60	12	20-80	3	450	—	—	STC, TR, RA, FT, AMF, BE
	2N424	TI	npn,DJ,si	85	.48	200	60	2	12-60	10	6 mc	—	—	STC, TR, RA, AMF, FT, BE
P 48	2N389	TI	npn,DJ,si	85	.48	200	60	2	12-60	10	7 mc	—	—	AMF, BE
	2N389A	STC	npn,D,si	85	—	—	60	—	—	—	—	—	—	STC, TR, RA, FN, FT
	2N424	TI	npn,DJ,si	85	.48	200	*80	2	12.60	10	6 mc	—	—	STC, TR, RA, FN, FT
	2N1619	TR	npn,DJ,si	85	.27	200	80	5	30	0.1	15 mc	—	—	STC, TR, RA, FT, AMF, BE
	2N1660	RA	npn,DB,si	85	0.5	200	80	2	90	10	40 mc	—	—	STC, TR, RA, AMF, FT, BE
	2N1661	RA	npn,DB,si	85	0.5	200	80	2	90	10	40 mc	—	—	AMF, BE
P 48	2N1662	RA	npn,DB,si	85	0.5	200	100	2	90	10	40 mc	—	—	STC, TR, RA, FN, FT
	2N1894	RA	npn,DB,si	85	0.5	200	60	2	30	.01	—	—	—	STC, TR, RA, FN, FT
	2N1895	RA	npn,DB,si	85	0.5	200	80	2	30	.01	—	—	—	STC, TR, RA, FN, FT
	2N1896	RA	npn,DB,si	85	0.5	200	60	2	90	.01	—	—	—	STC, TR, RA, FN, FT
	2N1897	RA	npn,DB,si	85	0.5	200	80	2	90	.01	—	—	—	STC, TR, RA, FN, FT
	2N1898	RA	npn,DB,si	85	0.5	200	100	2	90	.01	—	—	—	STC, TR, RA, FN, FT
P 48	2N2383	STC	npn,DJ,si	85	0.5	180	80	5	*20-60	*3.0	*3.0mc	—	—	5Q, Flange
	2N2384	STC	npn,DJ,si	85	0.5	180	80	5	*20-60	*3.0	*3.0mc	—	—	1 lex Stud
	2N2526	MO	ppn,AD,ge	85	1	110	80	10	*20-50	3	—	—	—	5Q, Flange
	2N2527	MO	ppn,AD,ge	85	1	110	120	10	*20-50	3	—	—	—	5Q, Flange
	2N2528	MO	ppn,AD,ge	85	1	110	160	10	*20-50	3	—	—	—	5Q, Flange
	STC1101	STC	npn,DJ,si	85	—	200	60	6	10-50	.025	1 mc	—	—	5Q, Flange
P 49	STC1102	STC	npn,DJ,si	85	—	200	100	6	10-50	.025	1 mc	—	—	5Q, Flange
	STC1103	STC	npn,DJ,si	85	—	200	60	6	25-75	.025	1 mc	—	—	5Q, Flange
	STC1104	STC	npn,DJ,si	85	—	200	60	6	25-75	.025	1 mc	—	—	5Q, Flange
	2N176	DE	ppn,A,ge	90	0.8	100	*40	7	*25/90	5	—	—	—	5Q, Flange
	2N255A	DE	ppn,A,ge	90	0.8	100	*15	5	—	5	—	—	—	5Q, Flange
	2N256A	DE	ppn,A,ge	90	0.8	100	*25	5	—	5	—	—	—	5Q, Flange
P 49	2N297A	MO	ppn,AJ,ge	90	1.2	100	*60	3	40-100	3	5	—	—	DE, BE, CL
	2N350A	MO	ppn,AJ,ge	90	1.4	100	*50	3	30	3	5	—	—	BE, CL
	2N351A	MO	ppn,AJ,ge	90	1.4	100	*50	4	45	3	5	—	—	BE, CL
	2N376A	MO	ppn,AJ,ge	90	1.4	100	*50	5	60	3	5	—	—	BE, CL
	2N376A	MO	ppn,AJ,ge	90	1.4	100	*50	5	60	3	5	—	—	BE, CL
	2N376A	MO	ppn,AJ,ge	90	1.4	100	*50	5	60	3	5	—	—	BE, CL

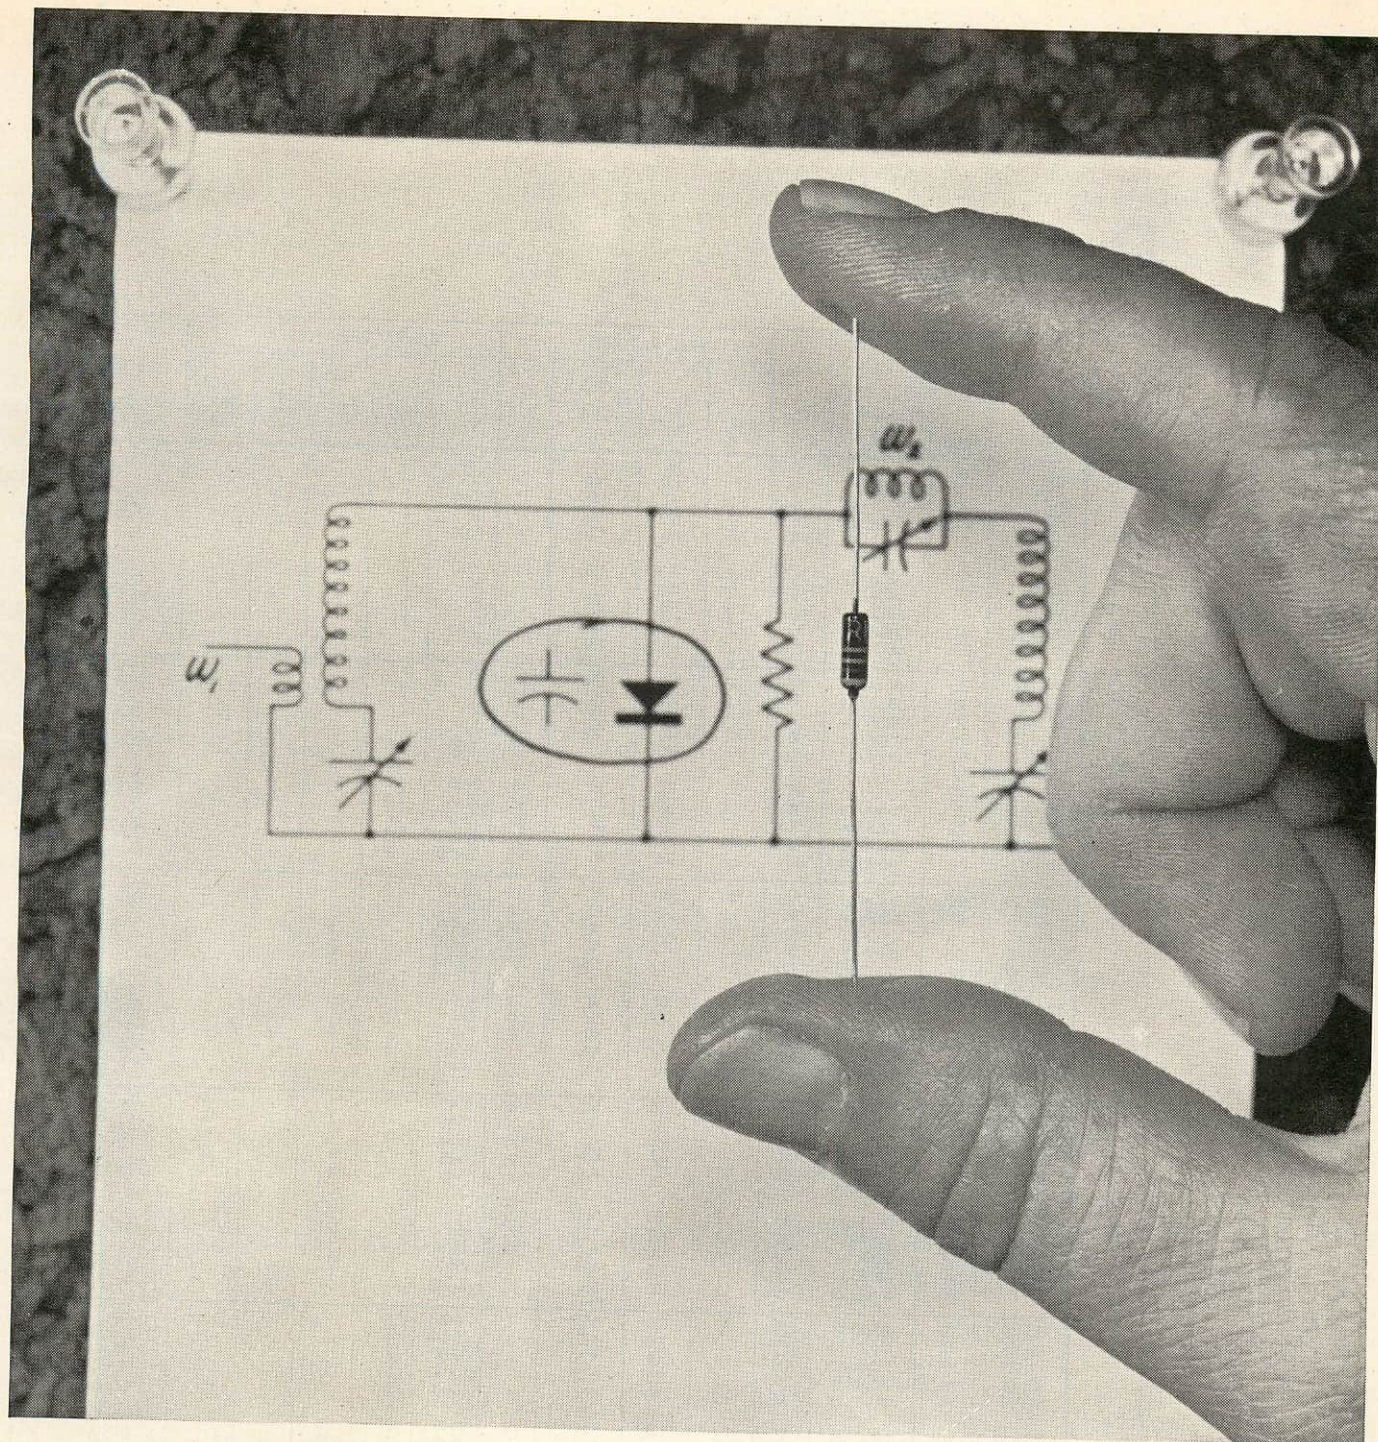

Raytheon introduces new F7 series of 63 VHF-UHF varactor diodes

Now available for use in medium power frequency multipliers and converters, these new Raytheon varactor diodes offer outstanding series resistance characteristics, a wide variety of types, and parameters maintained to close tolerances. The new F7 series varactors are mounted in standard glass packages with axial leads and are usable in frequency multipliers from 2 Mc to 2 Gc at input power levels from 0.1 to 10 watts. For immediate delivery contact your nearest Raytheon Field Office or, *Raytheon Company, Semiconductor Division, 350 Ellis Street, Mountain View, California.*

Cutoff frequency:	30-100 Gc
Normalization power:	5-20 kw
Reverse breakdown voltage:	45-120 v in 15 v steps
Junction capacitance at BVR:	1.8-8.2 pf in 10% EIA values 0.33-2.2 ohm in 20% EIA values
Series resistance:	0.33-2.2 ohm in 20% EIA values
Power dissipation:	1 watt
Price:	\$15.00 (1-24) \$9.90 (25-99)
Availability:	standard values in stock, others 10-30 days

RAYTHEON

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS						Remarks
					w, °C	T _i (°C)	V _{CE0} V	I _c (a)	h _{FE}	I _{CO} (ma)	f _{ae} T (kc)	Powr. Gain (db)	Powr. Out. (w)		
P 50	2N379	DE	npn,A,ge	90	.8	100	*80	7	*20/90	8	3	—	—	BE, CL BE, CL BE, CL BE, CL CL CL CL CL	
	2N380	DE	npn,A,ge	90	.8	100	*60	7	*20/90	8	3	—	—		
	2N627	MO	npn,AJ,ge	90	1.2	100	*40	10	10-30	4	5	38	—		
	2N628	MO	npn,AJ,ge	90	1.2	100	*60	10	10-30	4	5	38	—		
	2N629	MO	npn,AJ,ge	90	1.2	100	*80	10	10-30	4	5	38	—		
	2N630	MO	npn,AJ,ge	90	1.2	100	*100	10	10-30	4	5	38	—		
	2N677	BE	npn,AJ,ge	90	1.2	100	50	15	45	1	—	—	—		
	2N677A	BE	npn,AJ,ge	90	1.2	100	60	15	45	1	—	—	—		
P 51	2N677B	BE	npn,AJ,ge	90	1.2	100	90	15	45	1	—	—	—	CL CL CL CL CL CL CL CL	
	2N677C	BE	npn,AJ,ge	90	1.2	100	100	15	45	1	—	—	—		
	2N678	BE	npn,AJ,ge	90	1.2	100	150	15	75	1	—	—	—		
	2N678A	BE	npn,AJ,ge	90	1.2	100	60	15	75	1	—	—	—		
	2N678B	BE	npn,AJ,ge	90	1.2	100	90	15	75	1	—	—	—		
	2N678C	BE	npn,AJ,ge	90	1.2	100	100	15	75	1	—	—	—		
	2N1031	BE	npn,AJ,ge	90	0.8	100	30	15	20-60	1.0	—	—	—		
	2N1031A	BE	npn,AJ,ge	90	0.8	100	40	15	20-60	1.0	—	—	—		
P 52	2N1031B	BE	npn,AJ,ge	90	0.8	100	70	15	20-60	1.0	—	—	—	CL CL CL CL CL CL CL CL	
	2N1031C	BE	npn,AJ,ge	90	0.8	100	80	15	20-60	2.0	—	—	—		
	2N1032	BE	npn,AJ,ge	90	0.8	100	30	15	50-100	1.0	—	—	—		
	2N1032A	BE	npn,AJ,ge	90	0.8	100	40	15	50-100	1.0	—	—	—		
	2N1032B	BE	npn,AJ,ge	90	0.8	100	70	15	50-100	2.0	—	—	—		
	2N1032C	BE	npn,AJ,ge	90	0.8	100	80	15	50-100	2	—	—	—		
	2N1073	DE	npn,A,ge	90	0.8	110	*40	10	*20/60	10	30	—	—		
	2N1073A	DE	npn,A,ge	90	0.8	110	*80	10	*20/60	10	30	—	—		
P 53	2N1073B	DE	npn,A,ge	90	0.8	110	*120	10	*20/60	10	30	—	—	CL, BE BE, CL CL, BE BE CL, BE CL, BE BE BE	
	2N1162	MO	npn,AJ,ge	90	1.2	100	50	25	15-65	3	4	—	—		
	2N1162A	MO	npn,AJ,ge	90	1.2	100	*50	25	15-65	15	4	—	—		
	2N1163	MO	npn,AJ,ge	90	1.2	100	*50	25	15-65	3	4	—	—		
	2N1163A	MO	npn,AJ,ge	90	1.2	100	*50	25	15-65	15	4	—	—		
	2N1164	MO	npn,AJ,ge	90	1.2	100	*80	25	15-65	3	4	—	—		
	2N1164A	MO	npn,AJ,ge	90	1.2	100	*80	25	15-65	15	4	—	—		
	2N1165	MO	npn,AJ,ge	90	1.2	100	*80	25	15-65	3	4	—	—		
P 54	2N1165A	MO	npn,AJ,ge	90	1.2	100	*80	25	15-65	15	4	—	—	BE CL, BE BE CL, BE BE CL, BE BE BE	
	2N1166	MO	npn,AJ,ge	90	1.2	100	*80	25	15-65	3	4	—	—		
	2N1166A	MO	npn,AJ,ge	90	1.2	100	*100	25	15-65	15	4	—	—		
	2N1167	MO	npn,AJ,ge	90	1.2	100	*100	25	15-65	3	4	—	—		
	2N1167A	MO	npn,AJ,ge	90	1.2	100	*100	25	15-65	15	4	—	—		
	2N1358M	DE	npn,A,ge	90	0.8	110	*80	15	25/50	4	5.0	—	—		
	2N1359	MO	npn,AJ,ge	90	1.2	100	*50	3	35-90	3	7	—	—		
	2N1360	MO	npn,AJ,ge	90	1.2	100	*50	3	60-140	3	5	—	—		
P 55	2N1362	MO	npn,AJ,ge	90	1.2	100	*100	3	35-90	3	7	—	—	BE BE BE BE CL, BE BE CL, BE BE	
	2N1363	MO	npn,AJ,ge	90	1.2	100	*100	3	60-140	3	5	—	—		
	2N1364	MO	npn,AJ,ge	90	1.2	100	*120	3	35-90	3	7	—	—		
	2N1365	MO	npn,AJ,ge	90	1.2	100	*120	3	60-140	3	5	—	—		
	2N1529	MO	npn,AJ,ge	90	1.2	100	*40	5	20-40	2	10	—	—		
	2N1529A	MO	npn,AJ,ge	90	1.2	100	*40	5	20-40	2	10	—	—		
	2N1530	MO	npn,AJ,ge	90	1.2	100	*60	5	20-40	2	10	—	—		
	2N1530A	MO	npn,AJ,ge	90	1.2	100	*60	5	20-40	2	10	—	—		
P 56	2N1531	MO	npn,AJ,ge	90	1.2	100	*80	5	20-40	2	10	—	—	CL, BE BE CL, BE CL, DE, BE BE CL, DE, BE CL, DE, BE CL, DE, BE	
	2N1531A	MO	npn,AJ,ge	90	1.2	100	*80	5	20-40	2	10	—	—		
	2N1532	MO	npn,AJ,ge	90	1.2	100	*100	5	20-40	2	10	—	—		
	2N1532A	MO	npn,AJ,ge	90	1.2	100	*120	5	20-40	2	10	—	—		
	2N1533	MO	npn,AJ,ge	90	1.2	100	*40	5	*35-70	2	8.5	—	—		
	2N1534	MO	npn,AJ,ge	90	1.2	100	*40	5	35-70	2	8.5	—	—		
	2N1534A	MO	npn,AJ,ge	90	1.2	100	*40	5	35-70	2	8.5	—	—		
	2N1535	MO	npn,AJ,ge	90	1.2	100	*60	5	*35-70	2	8.5	—	—		

IF AVAILABILITY COUNTS, AMELCO SEMICONDUCTOR IS THE SOURCE!


*A broad line of planar transistors
plus these technological advances:*

MICRO-CIRCUITS




Using advanced diffusion techniques in conjunction with precise process control and thin film technology, Amelco offers both digital and analog integrated circuits. Stock items consist of nor logic building blocks; a wide variety of package configurations is possible. Micro-circuits offer the advantages of low cost, design simplicity, size, weight and power reductions.

FIELD EFFECT TRANSISTORS



Amelco FET's are N-Channel silicon planar devices which offer very high input impedance, negative temperature coefficient, low leakage current, low capacitance, low noise figure and all proven mechanical advantages of silicon double diffused transistors. FET's provide circuit simplicity, tiny size. Standard package, TO-18; also available in TO-5, TO-46, and TO-51 outlines.

SPECIAL ASSEMBLIES



Amelco Special Assemblies (ASA's) consist of any combination of those devices which are a standard product, mounted in a single header. ASA's in general are any specially selected multiple transistor combination such as Differential Amplifiers and Darlington configurations.

MICRO-CHIP TRANSISTORS



All standard Amelco transistors are available in Micro-Chip form for ultra-small assemblies. The semiconductor chip is bonded to a molybdenum substrate; junctions and surfaces are protected by a passivated surface of silicon oxide. The chip is coated for mechanical protection and is individually packed with conductive strips connected to the Micro-Chip's leads for testing in the package.

SALES OFFICES:

Southwest: 1625 East 126th St., Hawthorne, Calif.

Northwest: 1300 Terra Bella Avenue, Mountain View, California

Southeast: 1725 Eye Street, Washington, D.C.

Northeast: 873 Township Line Rd., Philadelphia, Pa.

REPRESENTATIVES:

CALIFORNIA

Los Angeles: Maggs Electronics • 685-6141

Mountain View: Electro-Tech Sales Co. • 968-7141

San Jose: Winco • CY 7-1068

COLORADO

Denver: Gossard & Associates • 935-5685

FLORIDA

Orlando: Gulf Electronic Sales • 424-3512

ILLINOIS

Chicago: Carlson Electronics Sales, Inc. • SP 4-0277

MARYLAND

Glenside, Pa.: Daniel and Company • 884-2130

MASSACHUSETTS

Wakefield: Dynamic Devices, Inc. • 245-9100

MINNESOTA

Minneapolis: R-J Sales & Engineering Co.
922-1425

NEW JERSEY

Morristown: Graydon Associates, Inc. • 538-9246

NEW YORK

Fayetteville: Graydon/Sherman, Inc. • 463-4533

Great Neck, L.I.: Gemini Electronics, Inc.

HU 2-4446

NORTH CAROLINA

Winston-Salem: Southeastern Sales, Inc. • 725-0554

OHIO

Dayton: Gibson Electronics Marketing Co.
298-7683

Lakewood: Electronic Sales • LA 1-5951

PENNSYLVANIA

Glenside: Daniel and Company • 884-2130

TEXAS

Dallas: Vista Engineering Associates • EM 3-6216

WASHINGTON

Seattle: N. R. Schultz Company • MA 4-8650



DATA SHEETS, TECHNICAL AND SALES INFORMATION AVAILABLE

AMELCO SEMICONDUCTOR

DIVISION OF TELEDYNE, INC./1300 TERRA BELLA AVE., MOUNTAIN VIEW, CALIFORNIA

MAIL ADDRESS: P. O. BOX 1030, MOUNTAIN VIEW, CALIFORNIA / PHONE: (415) 968-9241 / TWX: (415) 969-9112

ON READER-SERVICE CARD CIRCLE 458


May 24, 1963

T51

Why depend on 'selected' transistors
for your communications applications?

See how Amperex production-run P.A.D.T.'s

**you need
LOW NOISE AT HIGH FREQUENCY**

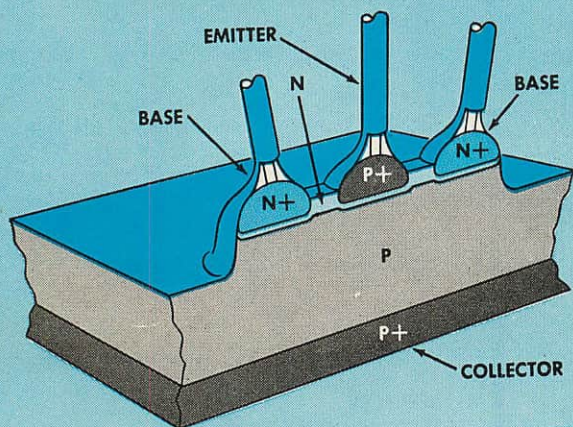


**3-DOT SMALL GEOMETRY
gives you**

Low $r_{bb'}$ • High f_T

as in the P.A.D.T. 2N2495

**you need
STABLE HIGH GAIN**

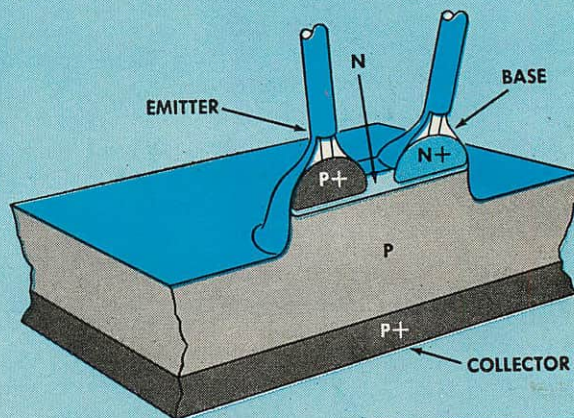

**2-DOT SMALL GEOMETRY
gives you**

**Stable High Gain
Low, low Capacity • High f_T**

as in the P.A.D.T. 2N2654

AMPEREX production-run P.A.D.T. transistors are immediately available from these and other authorized Industrial Electronic Distributors and in volume quantities from our semiconductor plant at Slatersville, Rhode Island

CALIFORNIA
R. V. WEATHERFORD COMPANY
Glendale 1, Calif.

KIERULFF ELECTRONICS
Los Angeles 15, Calif.
BRILL SEMICONDUCTOR CORP.
Oakland 6, Calif.

COLORADO
INTERSTATE RADIO & SUPPLY
Denver 4, Colorado

CONNECTICUT
CRAMER ELECTRONICS, INC.
Hamden, Conn.

DISTRICT OF COLUMBIA
ELECTRONIC WHOLESALERS, INC.
Washington 1, D. C.

FLORIDA
THURLOW ELECTRONICS, INC.
Cocoa, Fla. • Jacksonville, Fla. • Miami, Fla.
Orlando, Fla. • Pensacola, Fla. • Tampa, Fla.

ILLINOIS
NEWARK ELECTRONICS CORP.
Chicago, Ill.

INDIANA
RADIO DISTRIBUTING COMPANY
Indianapolis 6, Indiana

MASSACHUSETTS
RADIO SHACK CORP.
Boston, Mass.

MICHIGAN
RADIO SPECIALTIES COMPANY
Detroit, Michigan

MINNESOTA
ADMIRAL DISTRIBUTORS, INC.
St. Louis Park 16, Minn.

MISSOURI
BURSTEIN-APPLEBEE COMPANY
Kansas City, Missouri
INTERSTATE INDUSTRIAL ELECTRONICS
St. Louis 32, Missouri

NEW YORK
MILO ELECTRONICS
New York, N. Y.

ROME ELECTRONICS
Rome, N. Y.

OHIO
UNITED RADIO, INC.
Cincinnati, Ohio

OKLAHOMA
OIL CAPITAL INDUSTRIAL ELECTRONIC
DISTRIBUTORS
Tulsa, Oklahoma

OREGON
UNITED RADIO SUPPLY, INC.
Portland 9, Oregon


PENNSYLVANIA
RADIO ELECTRIC SERVICE CO.
Philadelphia, Pa.
CAMERADIO COMPANY
Pittsburgh, Pa.

TEXAS
BUSACKER ELECTRONIC EQUIPMENT CO., INC.
Houston 19, Texas

WASHINGTON
ROBERT E. PRIEBE COMPANY
Seattle 1, Washington

designs for specific requirements!


**you need
POWER AT HIGH FREQUENCY**

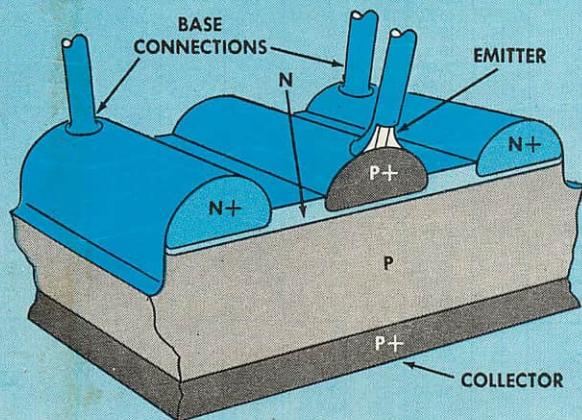

**P.A.D.T. STRIPE GEOMETRY
gives you**

**Lower $r_{bb'}$ · High Dissipation
High f_T · High Beta
as in the P.A.D.T. 2N2786**

**you need
HIGH GAIN, LOW NOISE, LOW COST**

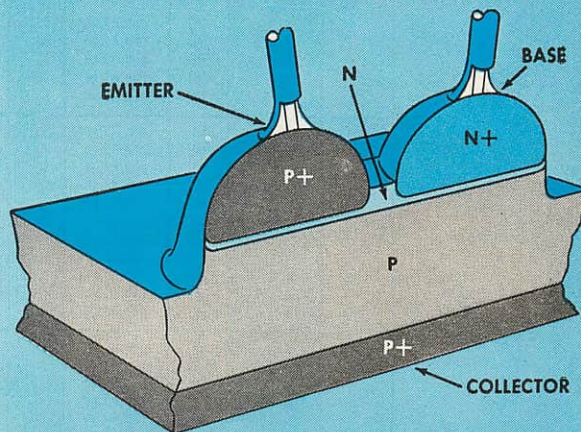

**2-DOT LARGE GEOMETRY
gives you**

a universal, high performance transistor for a wide range of frequencies for entertainment, industrial and military applications.

as in the P.A.D.T. 2N2084 (MIL-S-19500/213A NAVY)

P.A.D.T. 2N2089 for P.A.D.T. 2N2092 for
P.A.D.T. 2N2671 VHF P.A.D.T. 2N2672 RF

AMPEREX semiconductor specialists have been engaged in a continuing technological program that brings the superior performance and high-level production-benefits of PADT to ever expanding applications in the areas of communications, radar, instrumentation and AM-FM-TV receivers. From this program there have emerged the four distinctive P.A.D.T. transistor geometries illustrated above...each with "DESIGNED-IN" parameters and performance characteristics of significance to specific end-equipment needs — and reproducible, IN MASS PRODUCTION, without selection... at P.A.D.T. production-run prices! As you are undoubtedly aware, P.A.D.T. is the unique AMPEREX Post Alloy Diffusion Technique by which simultaneous diffusion and alloying take place under specified and controlled conditions. This exclusive process makes it possible to mass-produce superior communications type transistors with a base layer of only a few ten thousands of an inch and with extremely high cut-off frequencies... and P.A.D.T. does this with consistently high yields and with unequalled uniformity, stability and reliability. For detailed data and/or applications engineering assistance, write to: AMPEREX Electronic Corporation, Semiconductor and Receiving Tube Division, Hicksville, Long Island, New York.

IN CANADA: PHILIPS ELECTRON DEVICES, LTD., TORONTO 17, ONTARIO.



ON READER-SERVICE CARD CIRCLE 459

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS					Remarks
					w/°C	T _i (°C)	V _{CEO} *V _{CBO} (v)	I _c (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	f _{ae} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)	
P 57	2N1543	MO	npn,AJ,ge	90	1.2	100	*120	5	50-100	2	4	—	—	CL, BE
	2N1544	MO	npn,AJ,ge	90	1.2	100	*40	5	75-150	2	4	—	—	CL, BE
	2N1544A	MO	npn,AJ,ge	90	1.2	100	*40	5	75-150	2	4	—	—	BE
	2N1545	MO	npn,AJ,ge	90	1.2	100	*60	5	75-150	2	4	—	—	CL, BE
	2N1545A	MO	npn,AJ,ge	90	1.2	100	*60	5	75-150	2	4	—	—	BE
	2N1546	MO	npn,AJ,ge	90	1.2	100	*80	5	75-150	2	4	—	—	CL, BE
	2N1546A	MO	npn,AJ,ge	90	1.2	100	*80	5	75-150	2	4	—	—	BE
	2N1547	MO	npn,AJ,ge	90	1.2	100	*100	5	75-150	2	4	—	—	CL, BE
P 58	2N1547A	MO	npn,AJ,ge	90	1.2	100	*100	5	75-100	2	4	—	—	BE
	2N1548	MO	npn,AJ,ge	90	1.2	100	*120	5	75-150	2	4	—	—	CL, BE
	2N1549	MO	npn,AJ,ge	90	1.2	100	*40	15	10-30	3	10	—	—	CL, BE
	2N1549A	MO	npn,AJ,ge	90	1.2	100	*40	15	10-30	3	10	—	—	BE
	2N1550	MO	npn,AJ,ge	90	1.2	100	*60	15	10-30	3	10	—	—	CL, BE
	2N1550A	MO	npn,AJ,ge	90	1.2	100	*60	15	10-30	3	10	—	—	BE
	2N1551	MO	npn,AJ,ge	90	1.2	100	*80	15	10-30	2	10	—	—	CL, BE
	2N1551A	MO	npn,AJ,ge	90	1.2	100	*80	15	10-30	3	10	—	—	BE
P 59	2N1552	MO	npn,AJ,ge	90	1.2	100	*100	15	10-30	2	10	—	—	CL, BE
	2N1552A	MO	npn,AJ,ge	90	1.2	100	*100	15	10-30	3	10	—	—	BE
	2N1553	MO	npn,AJ,ge	90	1.2	100	*40	15	30-60	2	6	—	—	CL, BE
	2N1553A	MO	npn,AJ,ge	90	1.2	100	*40	15	30-60	3	6	—	—	BE
	2N1554	MO	npn,AJ,ge	90	1.2	100	*60	15	30-60	2	6	—	—	CL, BE
	2N1554A	MO	npn,AJ,ge	90	1.2	100	*60	15	30-60	3	6	—	—	BE
	2N1555	MO	npn,AJ,ge	90	1.2	100	*80	15	30-60	3	6	—	—	CL, BE
	2N1555A	MO	npn,AJ,ge	90	1.2	100	*80	15	30-60	3	6	—	—	BE
P 60	2N1556	MO	npn,AJ,ge	90	1.2	100	*100	15	30-60	3	6	—	—	CL, BE
	2N1556A	MO	npn,AJ,ge	90	1.2	100	*100	15	30-60	3	6	—	—	BE
	2N1557	MO	npn,AJ,ge	90	1.2	100	*40	15	50-100	3	6	—	—	CL, BE
	2N1557A	MO	npn,AJ,ge	90	1.2	100	*40	15	50-100	3	6	—	—	BE
	2N1558	MO	npn,AJ,ge	90	1.2	100	*60	15	50-100	3	5	—	—	CL, BE
	2N1558A	MO	npn,AJ,ge	90	1.2	100	*60	15	50-100	3	5	—	—	BE
	2N1559	MO	npn,AJ,ge	90	1.2	100	*80	15	50-100	3	5	—	—	CL, BE
	2N1559A	MO	npn,AJ,ge	90	1.2	100	*80	15	50-100	3	5	—	—	BE
P 61	2N1560	MO	npn,AJ,ge	90	1.2	100	*100	15	50-100	3	5	—	—	CL, BE
	2N1560A	MO	npn,AJ,ge	90	1.2	100	*100	15	50-100	3	5	—	—	BE
	2N392	DE	npn,AJ,ge	94	.8	100	*60	5	—	0.065	6	—	—	BE
	2N669	DE	npn,AJ,ge	94	1.2	100	*40	3	—	0.065	10	—	—	BE
	2N1159	DE	npn,AJ,ge	94	0.8	100	*80	5	—	0.065	10	—	—	BE
	2N1160	DE	npn,AJ,ge	94	0.8	100	*80	7	—	0.065	10	—	—	BE
	2N1168	DE	npn,AJ,ge	94	0.8	100	*50	5	—	0.065	10	—	—	BE, CL
	3N49	MH	npn,AJ,ge	94	1.25	100	*60	15	30-120	3	750	—	—	
P 62	3N50	MH	npn,AJ,ge	94	1.25	100	*80	15	20-80	3	450	—	—	
	3N51	MH	npn,AJ,ge	94	1.25	100	*40	15	30-120	3	750	—	—	
	3N52	MH	npn,AJ,ge	94	1.25	100	*60	15	20-80	3	450	—	—	
	151-04	WH	npn,AJ,si	100	1.4	150	*80	6.0	*11	10ma	25	—	—	
	151-07	WH	npn,AJ,si	100	1.4	150	*140	6.0	*11	10ma	25	—	—	
	152-04	WH	npn,AJ,si	100	1.4	150	*80	6.0	*18	10ma	25	—	—	
	152-05	WH	npn,AJ,si	100	1.4	150	*100	6.0	*18	10ma	25	—	—	
	152-08	WH	npn,AJ,si	100	1.4	150	*160	6.0	*18	10ma	25	—	—	
P 63	151-05	WH	npn,AJ,si	100	1.4	150	*100	6.0	*11	10ma	25	—	—	
	151-06	WH	npn,AJ,si	100	1.4	150	*120	6.0	*11	10ma	25	—	—	
	151-08	WH	npn,AJ,si	100	1.4	150	*160	6.0	*11	10ma	25	—	—	
	151-09	WH	npn,AJ,si	100	1.4	150	*180	6.0	*11	10ma	25	—	—	
	151-10	WH	npn,AJ,si	100	1.4	150	*200	6.0	*11	10ma	25	—	—	
	152-06	WH	npn,AJ,si	100	1.4	150	*120	6.0	*18	10ma	25	—	—	
	152-07	WH	npn,AJ,si	100	1.4	150	*140	6.0	*18	10ma	25	—	—	
	152-09	WH	npn,AJ,si	100	1.4	150	*180	6.0	*18	10ma	25	—	—	
P 64	152-10	WH	npn,AJ,si	100	1.4	150	*200	6.0	18	10ma	25	—	—	
	2N1084	TR	npn,P,si	50-100	.050	200	*60		*20	*10	*25,000	—	—	
	2N1085	TR	npn,ME,si	50-100	.050	200	60		*40	*15	*15,000	—	—	
	2N1157A	MH	npn,AJ,ge	100	1.43	95	*80	30	50	20	75	—	—	
	2N1206	TR	npn,ME,si	30-100	.030	200	60		15	*1	*30,000	—	—	
	2N1207	TR	npn,ME,si	30-100	.030	200	125		15	*1	*30,000	—	—	
	2N1651	BE	npn,DJ,ge	100	1.2	110	60	25	30	2.0	—	—	—	Sat. volt=1.0v
	2N1652	BE	npn,DJ,ge	100	1.2	110	100	25	30	2.0	—	—	—	Sat. volt=0.5v
P 65	2N1653	BE	npn,DJ,ge	100	1.2	110	120	25	30	2.0	—	—	—	Sat. volt=0.5v
	2N1675	WE	npn,D,ge	100	—	150	100	10	12	0.008	50mc	—	100	
	2N1936	TI	npn,MS,si	100	1.34	175	60	15	—	20	7 mc	—	—	
	2N1937	TI	npn,MS,si	100	1.34	175	80	15	—	20	7 mc	—	—	
	2N1899	PSI	npn,DM,si	125	1	150	140	10	10	20	20	10	100	hi freq., hi power
	2N1900	PSI	npn,DM,si	125	1	150	140	5	10	20	20	—	—	hi freq., hi power

ALLIED

sets the record for fast service



*wherever you are
it's easier, faster to do business with*

ALLIED

CHICAGO

100 N. Western Ave., Chicago 80
TAYlor 9-9100 (AREA CODE 312)
TWX: 312-431-1721

DETROIT

16047 West McNichols Road, Detroit 35
836-0007 (AREA CODE 313)

MILWAUKEE

2461 W. Center St., Milwaukee 6
Hilltop 4-8320 (AREA CODE 414)

MINNEAPOLIS • ST. PAUL

730 E. 38th St., Minneapolis 7
TAYlor 7-5401 (AREA CODE 612)

CLEVELAND

4824 Turney Road, Cleveland 25
883-5252 (AREA CODE 216)

LOS ANGELES AREA

2085 East Foothill Blvd., Pasadena
MURray 1-5291 • SYcamore 5-5901
(AREA CODE 213)
TWX: 213-449-1455

SAN FRANCISCO AREA

2439 Birch Street, Palo Alto, Cal.
321-0240 (AREA CODE 415)

SEATTLE

1020 Fourth Ave., South, Seattle 4
MUTual 2-8026 (AREA CODE 206)

DAYTON

1823 Catalpa Drive, Dayton 6
278-5866 (AREA CODE 513)

DALLAS

5622 Dyer Street, Dallas 6
EMerson 3-6221 (AREA CODE 214)

DENVER

6767 East 39th Avenue, Denver 7
399-2250 (AREA CODE 303)

ROCHESTER

1622 Monroe Ave., Rochester 18, N. Y.
CHapel 4-8750 (AREA CODE 716)

WASHINGTON D.C. • BALTIMORE

5509 Colorado Ave., N.W.
Washington 11, D.C.
TUckerman 2-6560
TUckerman 2-5100 (AREA CODE 202)

use the services of the ALLIED facility nearest you

ALLIED ELECTRONICS

industrial subsidiary of

ALLIED RADIO




◀ **ASK FOR YOUR ALLIED 672-PAGE, 1963 INDUSTRIAL CATALOG**

ON READER-SERVICE CARD CIRCLE 460

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS			CHARACTERISTICS						Remarks
					w/°C	T _i (°C)	V _{CEO} V _{CBO} (v)	I _c (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	f _{ae} T (kc)	Powr. Gain (db)	Powr. Out. (w)	
P 64	2N1901	PSI	npn,DM,si	125	1	150	140	5	10	20	20	—	—	hi freq., hi pwr.
	2N1902	PSI	npn,DM,si	125	1	150	140	10	10	20	20	—	—	
	2N1903	PSI	npn,DM,si	125	1	150	140	10	10	20	20	10	100	
	2N1904	PSI	npn,DM,si	125	1	150	140	10	10	20	20	—	—	hi freq., hi power
	PT900	PSI	npn,DM,si	125	1	150	80	10	3	10	20	10	100	
	2N173	DE	npn,AJ,ge	150	0.5	100	*60	0.5	—	0.1	10	—	20	MO, TS, TI, RCA, SO, BE
	2N174	DE	npn,AJ,ge	150	0.5	100	*80	15	—	0.1	10	—	40	TS, MO, TI, RCA, SO, BE
	2N229	WH	npn,AJ,si	150	2.0	150	*200	10	*100	10ma	30	—	—	
P 65	2N277	DE	npn,AJ,ge	150	0.5	100	*40	15	—	0.1	10	—	20	MO, TS, TI, RCA, SO, BE
	2N278	DE	npn,AJ,ge	150	0.5	100	*50	15	—	0.1	10	—	20	MO, TS, TI, RCA, BE, SO
	2N441	DE	npn,AJ,ge	150	0.5	100	*40	15	—	0.1	10	—	20	MO, TS, TI, RCA, BE
	2N442	DE	npn,AJ,ge	150	0.5	100	*50	15	—	0.1	10	—	20	MO, TS, TI, RCA, BE
	2N443	DE	npn,AJ,ge	150	0.5	100	*60	15	—	0.1	10	—	20	MO, TS, TI, RCA, BE
	2N456A	CL	npn,A,ge	150	0.5	100	*40	7	*30-90	*0.5	*200	—	—	USA, Mil
	2N457A	CL	npn,A,ge	150	0.5	100	*60	7	*30-90	*0.5	*200	—	—	USA, Mil
	2N458A	CL	npn,A,ge	150	0.5	100	*80	7	*30-90	*0.5	*200	—	—	USA, Mil
P 66	2N511	TI	npn,AJ,ge	150	2	100	40	25	20-60	5	—	—	—	Sat. volt=0.2v, BE
	2N511A	TI	npn,AJ,ge	150	2	100	60	25	20-60	5	—	—	—	Sat. volt=0.2v, BE
	2N511B	TI	npn,AJ,ge	150	2	100	80	25	20-60	5	—	—	—	BE
	2N512	TI	npn,AJ,ge	150	2	100	40	25	20-60	5	—	—	—	
	2N512A	TI	npn,AJ,ge	150	2	100	60	25	20-60	5	—	—	—	Sat. volt=0.4v
	2N512B	TI	npn,AJ,ge	150	2	100	80	25	20-60	5	—	—	—	Sat. volt=0.4v
	2N513	TI	npn,AJ,ge	150	2	100	40	25	20-60	5	—	—	—	Sat. volt=0.4v
	2N513A	TI	npn,AJ,ge	150	2	100	60	25	20-60	5	—	—	—	
P 67	2N513B	TI	npn,AJ,ge	150	2	100	80	25	20-60	5	—	—	—	
	2N514	TI	npn,AJ,ge	150	2	100	40	25	20-60	5	—	—	—	Sat. volt=0.5v, BE
	2N514A	TI	npn,AJ,ge	150	2	100	60	25	20-60	5	—	—	—	Sat. volt=0.5v, BE
	2N514B	TI	npn,AJ,ge	150	2	100	80	25	20-60	5	—	—	—	Sat. volt=0.5v, BE
	2N1015	WH	npn,AJ,si	150	1.43	150	*30	7.5	*10	10	25	—	—	STC, AMF
	2N1015A	WH	npn,AJ,si	150	1.43	150	*60	7.5	*10	10	25	—	—	AMF
	2N1015B	WH	npn,AJ,si	150	1.43	150	*100	7.5	*10	10	25	—	—	AMF
	2N1015C	WH	npn,AJ,si	150	1.43	150	*150	7.5	*10	10	25	—	—	AMF
P 68	2N1016	WH	npn,AJ,si	150	1.43	150	*30	7.5	*10	10	30	—	—	
	2N1016A	AMF	npn,FJ,si	150	1.4	150	60	7.5	8	10	—	—	—	
	2N1016B	AMF	npn,FJ,si	150	1.4	150	100	75	8	10	—	—	—	
	2N1016D	WH	npn,AJ,si	150	1.43	150	*200	7.5	*10	10	30	—	—	
	2N1021	TI	npn,AJ,ge	150	2	100	*100	10	*30-90	2	—	—	—	DE, BE
	2N1022	TI	npn,AJ,ge	150	2	100	*120	10	*30-90	2	—	—	—	DE, BE
	2N1099	DE	npn,AJ,ge	150	0.5	100	*80	15	—	0.1	10	—	40	TS, MO, TI, RCA, SO, BE
	2N1100	DE	npn,AJ,ge	150	0.5	100	*100	15	—	0.1	10	—	40	TS, MO, RCA, SO, BE
P 69	2N1358A	DE	npn,A,ge	150	0.5	110	*100	15	*25/50	4	5.0	—	—	
	2N1412USN	DE	npn,A,ge	150	0.5	110	*100	15	*25/50	4	5.0	—	—	
	2N1907	TI	npn,AD,ge	150	2	100	100	20	10	10	—	—	—	
	2N1908	TI	npn,AD,ge	150	2	100	130	20	10	10	—	—	—	TS
	2N1980	TI	npn,AJ,ge	150	2	100	*50	15	50	6	—	—	—	
	2N1981	TI	npn,AJ,ge	150	2	100	*70	15	50	6	—	—	—	TS
	2N1982	TI	npn,AJ,si	150	2	100	*90	15	50	6	—	—	—	TS
	2N2015	RCA	npn,si	150	—	—	100	10	10	*15	—	—	—	
P 70	2N2016	RCA	npn,si	150	—	—	130	10	*15	—	—	—	—	
	2N2233	WH	npn,AJ,si	150	2.0	150	*200	10	*400	10ma	35	—	—	
	2N2226	WH	npn,F,si	150	2	150	*50	10	100	10	11	—	—	
	2N2227	WH	npn,F,si	150	2	150	*100	10	100	10	11	—	—	
	2N2228	WH	npn,F,si	150	2	150	*150	10	100	10	11	—	—	
	2N2231	WH	npn,F,si	150	2	150	*100	10	400	10	11	—	—	
	2N2230	WH	npn,F,si	150	2	150	*50	10	400	10	11	—	—	
	2N2232	WH	npn,F,si	150	2	150	*150	10	400	10	11	—	—	
P 70	2N2330	MO	npn,DDP,si	150	0.8	175	5.33	*30	—	50	0.1	—	7	Epitaxial
	2N2331	MO	npn,DDP,si	150	0.5	175	3.33	*30	—	50	0.1	—	7	Epitaxial
	2N2580	DE	npn,D,si	150	0.7	150	400	10	*10/40	5	50	—	—	
	2N2581	DE	npn,D,si	150	0.7	150	400	10	*25/65	5	50	—	—	
	2N2582	DE	npn,D,si	150	0.7	150	500	10	*10/40	5	50	—	—	
	2N2583	DE	npn,D,si	150	0.7	150	500	10	*25/65	5	50	—	—	
	2N2075	MO	npn,AJ,ge	170	2	110	80	15	25-100	4.0	10	—	—	SO
	2N2075A	MO	npn,AJ,ge	170	2	110	80	15	25-100	4.0	10	—	—	"Meg-A-Life"
P 70	2N2076	MO	npn,AJ,ge	170	2	110	70	15	25-100	4.0	10	—	—	SO, "Meg-A-Life"
	2N2077	MO	npn,AJ,ge	170	2	110	50	15	25-100	4.0	10	—	—	SO, "Meg-A-Life"
	2N2078	MO	npn,AJ,ge	170	2	110	40	15	25-100	4.0	10	—	—	SO, "Meg-A-Life"
	2N2079	MO	npn,AJ,ge	170	2	110	80	15	40-160	4.0	10	—	—	SO, "Meg-A-Life"
	2N2080	MO	npn,AJ,ge	170	2	110	70	15	40-160	4.0	10	—	—	SO, "Meg-A-Life"
	2N2081	MO	npn,AJ,ge	170	2	110	50	15	40-160	4.0	10	—	—	SO, "Meg-A-Life"
	2N2077	MO	npn,AJ,ge	170	2	110	40	15	25-100	4.0	10	—	—	SO, "Meg-A-Life"
	2N2078	MO	npn,AJ,ge	170	2	110	80	15	40-160	4.0	10	—	—	SO, "Meg-A-Life"

Indium Arsenide Phosphide
 Polycrystalline Silicon
 Single Crystal Silicon
 Gallium Arsenide
 Gallium Antimonide
 Gallium Phosphide
 Indium Arsenide
 Epitaxial Silicon
 Gallium Arsenide Phosphide
 Z-Met[®] Thermoelectric Material

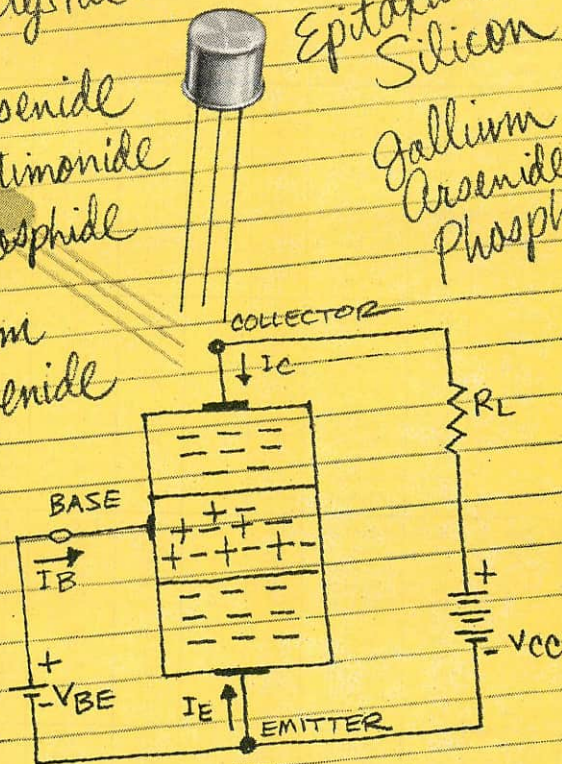

**Boost your device design
 "off-the-pad" with
 Merck solid-state materials**

Merck makes 10 different solid-state materials. When you specify Merck you're almost never restricted by materials in the scope of your design. In fact, you can design 99 per cent of devices today with Merck materials. As added benefits you'll enjoy device uniformity, fewer rejects and simplified purchasing.

Newcomers to the industry ask why. Old-timers know Merck is a basic manufacturer of polycrystalline silicon, with the largest research budget in the industry during the past half decade. As a result Merck customers have been consistently first to exploit such discoveries as single crystal, float-zone refined silicon, epitaxial silicon, Z-Met

Thermoelectric Material and many III-V compounds. If you're interested in the profitable aspects of being first, write, wire or phone us today. Merck makes it awfully easy to be a customer.

Electronic  Chemicals Division
MERCK & CO., INC. • RAHWAY, NEW JERSEY



RESEARCH and PRODUCTION FOR BETTER SOLID-STATE MATERIALS


ON READER-SERVICE CARD CIRCLE 461

May 24, 1963

T57

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS						Remarks
					w/°C	T _i (°C)	V _{CEO} *V _{CBO} (v)	I _c (a)	h _{fe} *h _{FE}	I _{CO} (ma) (*μa)	f _{ae} *f _T (K)	Pow _r . Gain (db)	Pow _r . Out. (w)		
P 71	2N2082	MO	pnnp,AJ,ge	170	2	110	*40	15	*70	4	10	—	—	SO, "Meg-A-Life" "Meg-A-Life" SO, "Meg-A-Life"	
	2N2082A	MO	pnnp,AJ,ge	170	2	110	*40	15	*70	4	10	—	—		
	2N2152	MO	pnnp,AJ,ge	170	2	110	45	30	50-100	4.0	2.7	—	—		
	2N2152A	MO	pnnp,AJ,ge	170	2	110	45	30	50-100	4.0	2.7	—	—		
	2N2153	MO	pnnp,AJ,ge	170	2	110	60	30	50-100	4.0	2.7	—	—	SO, "Meg-A-Life" SO SO, "Meg-A-Life" SO, "Meg-A-Life" SO, "Meg-A-Life"	
	2N2154	MO	pnnp,AJ,ge	170	2	110	75	30	50-100	4.0	2.7	—	—		
	2N2155	MO	pnnp,AJ,ge	170	2	110	90	30	50-100	4.0	2.7	—	—		
	2N2156	MO	pnnp,AJ,ge	170	2	110	45	30	80-160	4.0	2.7	—	—		
2N2157	MO	pnnp,AJ,ge	170	2	110	60	30	80-160	4.0	2.7	—	—			
2N2158	MO	pnnp,AJ,ge	170	2	110	75	30	10-160	4.0	2.7	—	—			
P 72	2N2490	MO	pnnp,AJ,ge	170	2	110	*70	15	*20-40	3	10	—	—	"Meg-A-Life" "Meg-A-Life" "Meg-A-Life" "Meg-A-Life"	
	2N2491	MO	pnnp,AJ,ge	170	2	110	*60	15	*25-50	3	10	—	—		
	2N2492	MO	pnnp,AJ,ge	170	2	110	*80	15	*25-50	2	10	—	—		
	2N2493	MO	pnnp,AJ,ge	170	2	110	*100	15	*25-50	3	10	—	—		
	2N2728	MO	pnnp,AJ,ge	170	2	110	*15	50	*40-130	*30	—	—	—		
	MP500	MO	pnnp,AJ,ge	170	2	110	45	60	30-60	4.0	3.6	—	—		
	MP500A	MO	pnnp,AJ,ge	170	2	110	45	60	30-60	4.0	3.6	—	—		
	MP501	MO	pnnp,AJ,ge	170	2	110	60	60	30-60	4.0	3.6	—	—		
MP502	MO	pnnp,AJ,ge	170	2	110	75	60	30-60	4.0	3.6	—	—			
MP504	MO	pnnp,AJ,ge	170	2	110	45	60	50-100	4.0	3.6	—	—			
P 73	MP505	MO	pnnp,AJ,ge	170	2	110	60	60	50-100	4.0	3.6	—	—	"Meg-A-Life" "Meg-A-Life" USA	
	MP506	MO	pnnp,AJ,ge	170	2	110	75	60	50-100	4.0	3.6	—	—		
	2N574	MH	pnnp,AJ,ge	187	2.5	100	*60	10	9-22	7	100	—	—	USA	
	2N574A	MH	pnnp,AJ,ge	187	2.5	100	*80	10	9-22	20	100	—	—		
	2N575	MH	pnnp,AJ,ge	187	2.5	100	*60	25	19-42	7	150	—	—		
	2N575A	MH	pnnp,AJ,ge	187	2.5	100	*80	25	19-42	20	150	—	—		
	2N1157	MH	pnnp,AJ,ge	187	2.5	100	*60	40	38-84	7	200	—	—		
	DA3F3	MH	pnnp,AJ,ge	187	2.5	100	*60	25	35	20	175	—	—		
	2N2739	WH	npn,AJ,si	200	2.0	175	*50	20	*10	15ma	14	—	—		
	2N2740	WH	npn,AJ,si	200	2.0	175	*200	20	*10	15ma	14	—	—		
P 74	2N2741	WH	npn,AJ,si	200	2.0	175	*150	20	*10	15ma	14	—	—		
	2N2742	WH	npn,AJ,si	200	2.0	175	*200	20	*10	15ma	14	—	—		
	2N2745	WH	npn,AJ,si	200	2.0	175	*50	20	*10	15ma	14.5	—	—		
	2N2746	WH	npn,AJ,si	200	2.0	175	*100	20	*10	15ma	14.5	—	—		
	2N2747	WH	npn,AJ,si	200	2.0	175	*150	20	*10	15ma	14.5	—	—		
	2N2748	WH	npn,AJ,si	200	2.0	175	*200	20	*10	15ma	14.5	—	—		
	2N2751	WH	npn,AJ,si	200	2.0	175	*50	20	*10	15ma	16	—	—		
	2N2752	WH	npn,AJ,si	200	2.0	175	*100	20	*10	15ma	16	—	—		
	2N2753	WH	npn,AJ,si	200	2.0	175	*150	20	*10	15ma	16	—	—		
	2N2754	WH	npn,AJ,si	200	2.0	175	*200	20	*10	15ma	16	—	—		
P 75	2N2757	WH	npn,AJ,si	200	2.0	175	*50	30	*10	15ma	14	—	—		
	2N2758	WH	npn,AJ,si	200	2.0	175	*100	30	*10	15ma	14	—	—		
	2N2759	WH	npn,AJ,si	200	2.0	175	*150	30	*10	15ma	14	—	—		
	2N2760	WH	npn,AJ,si	200	2.0	175	*200	30	*10	15ma	14	—	—		
	2N2761	WH	npn,AJ,si	200	2.0	175	*250	30	*10	15ma	14	—	—		
	2N2763	WH	npn,AJ,si	200	2.0	175	*50	30	*10	15ma	14.5	—	—		
	2N2764	WH	npn,AJ,si	200	2.0	175	*100	30	*10	15ma	14.5	—	—		
	2N2765	WH	npn,AJ,si	200	2.0	175	*150	30	*10	15ma	14.5	—	—		
	2N2766	WH	npn,AJ,si	200	2.0	175	*200	30	*10	15ma	14.5	—	—		
	2N2769	WH	npn,AJ,si	200	2.0	175	*50	30	*10	15ma	16	—	—		
P 76	2N2771	WH	npn,AJ,si	200	2.0	175	*150	30	*10	15ma	16	—	—		
	2N2772	WH	npn,AJ,si	200	2.0	175	*200	30	*10	15ma	16	—	—		
	2N2776	WH	npn,AJ,si	200	2.0	175	*100	30	*10	15ma	16	—	—		
	2N1809	WH	npn,AJ,si	250	2.22	175	*50	30	10	15	17	—	—		
	2N1810	WH	npn,AJ,si	250	2.22	175	*100	30	10	15	17	—	—		
	2N1811	WH	npn,AJ,si	250	2.22	175	*150	30	10	15	17	—	—		
	2N1812	WH	npn,AJ,si	250	2.22	175	*200	30	10	15	17	—	—		
	2N1813	WH	npn,FJ,si	250	2.22	175	*250	30	10	15	—	—	—		
2N1814	WH	npn,FJ,si	250	2.22	175	*300	30	10	15	—	—	—			
2N1816	WH	npn,AJ,si	250	2.22	175	*50	30	10	15	18	—	—			
P 77	2N1817	WH	npn,AJ,si	250	2.22	175	*100	30	10	15	18	—	—		
	2N1818	WH	npn,AJ,si	250	2.22	175	*150	30	10	15	18	—	—		
	2N1819	WH	npn,AJ,si	250	2.22	175	*200	30	10	15	18	—	—		
	2N1823	WH	npn,AJ,si	250	2.22	175	*50	30	10	15	19	—	—		
	2N1824	WH	npn,AJ,si	250	2.22	175	*100	30	10	15	19	—	—		
	2N1825	WH	npn,AJ,si	250	2.22	175	*150	30	10	15	19	—	—		
	2N1826	WH	npn,AJ,si	250	2.22	175	*200	30	10	15	19	—	—		
	2N1830	WH	npn,AJ,si	250	2.22	175	*50	30	*10	5ma	14	—	—		
	2N1831	WH	npn,AJ,si	250	2.22	175	*100	30	*10	5ma	14	—	—		
	2N1832	WH	npn,AJ,si	250	2.22	175	*150	30	*10	5ma	14	—	—		

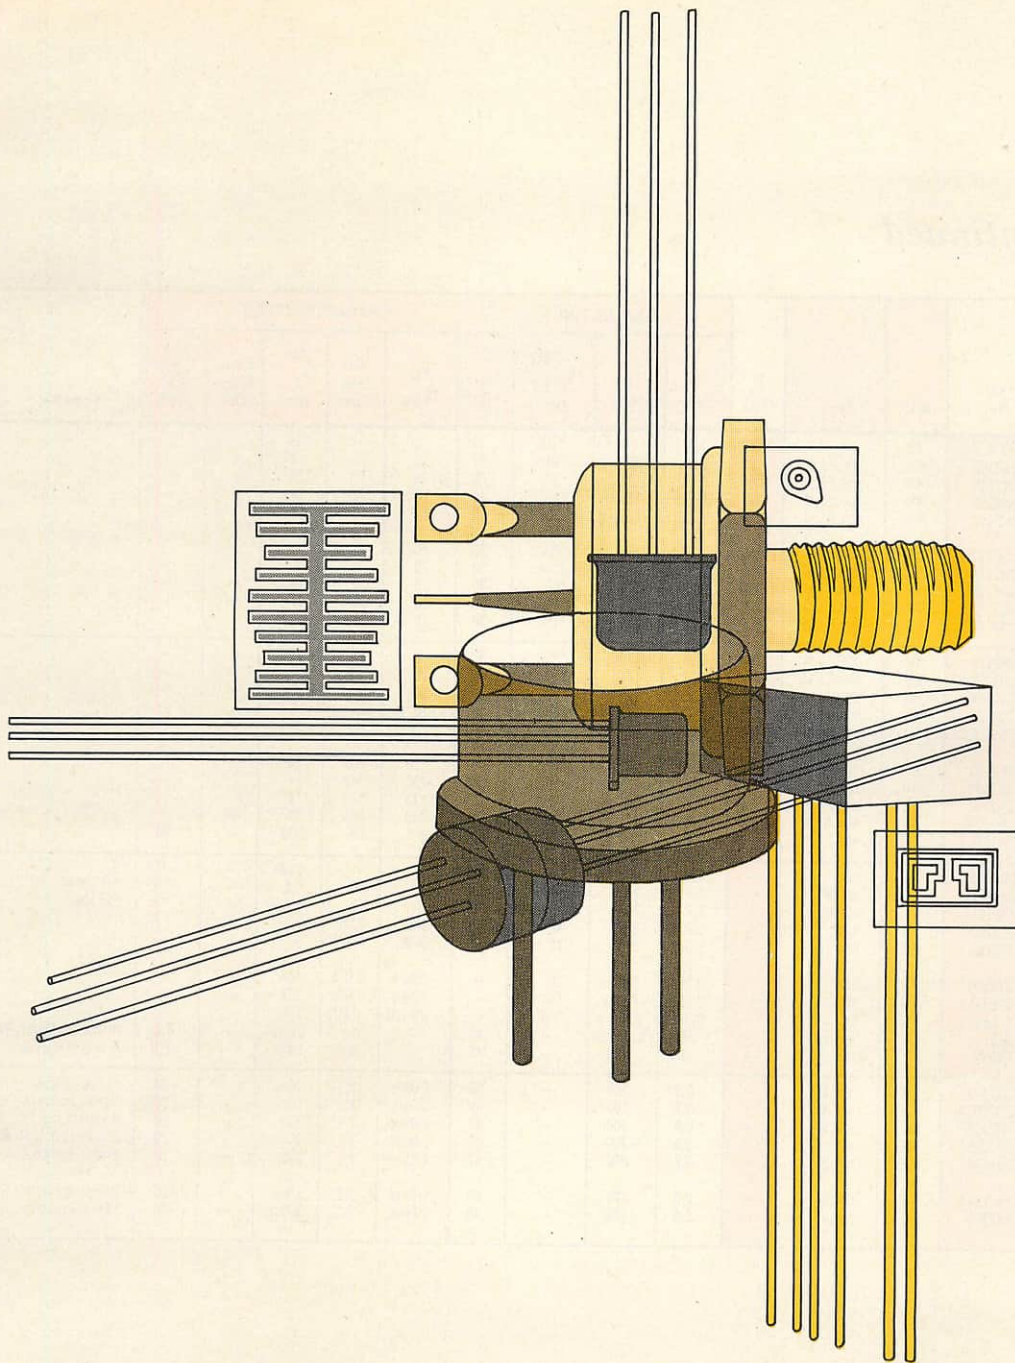

performance

... our constant parameter

NATIONAL SEMICONDUCTOR CORPORATION OFFERS THE DESIGNER A COMPLETE SILICON LINE OF TRANSISTORS, INTEGRATED DEVICES, AND PACKAGED MODULES . . . **NPN AND PNP SMALL SIGNAL:** NPN PLANAR, NPN MESA, NPN ALLOY. **NPN AND PNP SWITCHING:** NPN MESA EPITAXIAL, NPN PLANAR EPITAXIAL, PNP ALLOY. **NPN MEDIUM POWER:** NPN MESA EPITAXIAL, NPN PLANAR EPITAXIAL. **INCH* (INTEGRATED CHOPPER):** NPN PLANAR EPITAXIAL INTEGRATED DEVICE. **NPN VHF DRIVER AND POWER:** NPN PLANAR EPITAXIAL, NPN MESA. **NPN AVALANCHE.** FOR FURTHER INFORMATION, WRITE OR PHONE NATIONAL SEMICONDUCTOR CORPORATION, PRODUCT MARKETING DEPARTMENT, DANBURY, CONNECTICUT.

*Pat. applied for



NATIONAL SEMICONDUCTOR

CORPORATION


DANBURY, CONN. • PHONE: (AREA CODE 203) 743-7624 • TWX 203-744-1590

ON READER-SERVICE CARD CIRCLE 462

P continued

Cross Index Key	Type No.	Mfr.	Type	P _c (w)	MAX. RATINGS				CHARACTERISTICS						Remarks
					w, °C	T _i (°C)	V _{CEO} *V _{CBO} (v)	I _c (a)	h _{fe} *h _{FE}	I _{CO} (ma) (*μa)	f _{ae} *f _T (kc)	Powr. Gain (db)	Powr. Out. (w)		
P 78	2N1833	WH	npn, AJ, si	250	2.22	175	*200	30	*10	5ma	14	—	—		
	2N2109	WH	npn, FJ, si	250	2.22	175	*50	30	10	15	14	—	—		
	2N2110	WH	npn, FJ, si	250	2.22	175	*100	30	10	15	14	—	—		
	2N2111	WH	npn, FJ, si	250	2.22	175	*150	30	10	15	14	—	—		
	2N2112	WH	npn, FJ, si	250	2.22	175	*200	30	10	15	14	—	—		
	2N2113	WH	npn, FJ, si	250	2.22	175	*250	30	10	15	—	—	—		
	2N2114	WH	npn, FJ, si	250	2.22	175	*300	30	10	15	—	—	—		
	2N2116	WH	npn, FJ, si	250	2.22	175	*50	30	10	15	14.5	—	—		
	2N2117	WH	npn, FJ, si	250	2.22	175	*100	30	10	15	14.5	—	—		
	2N2118	WH	npn, FJ, si	250	2.22	175	*150	30	10	15	14.5	—	—		
P 79	2N2119	WH	npn, FJ, si	250	2.22	175	*200	30	10	15	14.5	—	—		
	2N2123	WH	npn, FJ, si	250	2.22	175	*50	30	10	15	16	—	—		
	2N2124	WH	npn, FJ, si	250	2.22	175	*100	30	10	15	16	—	—		
	2N2125	WH	npn, FJ, si	250	2.22	175	*150	30	10	15	16	—	—		
	2N2126	WH	npn, FJ, si	250	2.22	175	*200	30	10	15	16	—	—		
	2N2130	WH	npn, AJ, si	250	2.22	175	*50	30	*10	5ma	14	—	—		
	2N2131	WH	npn, AJ, si	250	2.22	175	*100	30	*10	5ma	14	—	—		
	2N2132	WH	npn, AJ, si	250	2.22	175	*150	30	*10	5ma	14	—	—		
	2N2133	WH	npn, AJ, si	250	2.22	175	*200	30	*10	5ma	14	—	—		
	2N1620	TR	npn	—	0.4	200°C	*100	5	8	10	800	—	60		
P 80	2N2032	TR	npn	—	0.9	200°C	*45	5	12	—	1200	—	45	*at 200mc *at 100mc Planar Epitaxial, RA Planar Passivated, RA	
	SN-101	CS	npn, MS, si	—	8.7	200	—	140	1	40	0.5	—	*3		
	SN-102	CS	npn, MS, si	—	8.7	200	—	120	1	40	0.5	—	*5		
	ST5060	TR	npn	—	0.025	200	40	—	9-36	0.005	—	—	—		
	ST5061	TR	npn	—	0.025	200	70	—	9-36	0.005	—	—	—		
	ST6510	TR	npn	—	0.088	200	20	—	20min	0.005	10K	—	—		
	ST6511	TR	npn	—	0.088	200	*40	—	20-60	0.005	10K	—	—		
	ST6512	TR	npn	—	0.088	200	*40	—	40-120	0.005	10K	—	—		
	2N914	GE	npn, si	—	360	200	—	40	—	3.0	25mμ	—	6.0		
	2N916	GE	npn, si	—	360	200	—	45	—	3.0	10mμ	—	6.0		
P 81	2N2192	GE	npn, si	—	0.8	200	—	60	1.0amp	2.5	10mμ	—	20	Planar Epitaxial, RA Planar Epitaxial, RA Planar Epitaxial, RA Planar Epitaxial, RA Planar Epitaxial, RA Planar Epitaxial, RA Planar Epitaxial, RA	
	2N2192A	GE	npn, si	—	0.8	200	—	60	1.0amp	2.5	10mμ	—	20		
	2N2193	GE	npn, si	—	0.8	200	—	80	1.0amp	2.5	10mμ	—	20		
	2N2193A	GE	npn, si	—	0.8	200	—	80	1.0amp	2.5	10mμ	—	20		
	2N2194	GE	npn, si	—	0.8	200	—	60	1.0amp	2.5	10mμ	—	20		
	2N2194A	GE	npn, si	—	0.8	200	—	60	1.0amp	2.5	10mμ	—	20		
	2N2195	GE	npn, si	—	0.6	200	—	45	1.0amp	2.5	100mμ	—	20		

Introducing... 3 NEW INSTRUMENTS

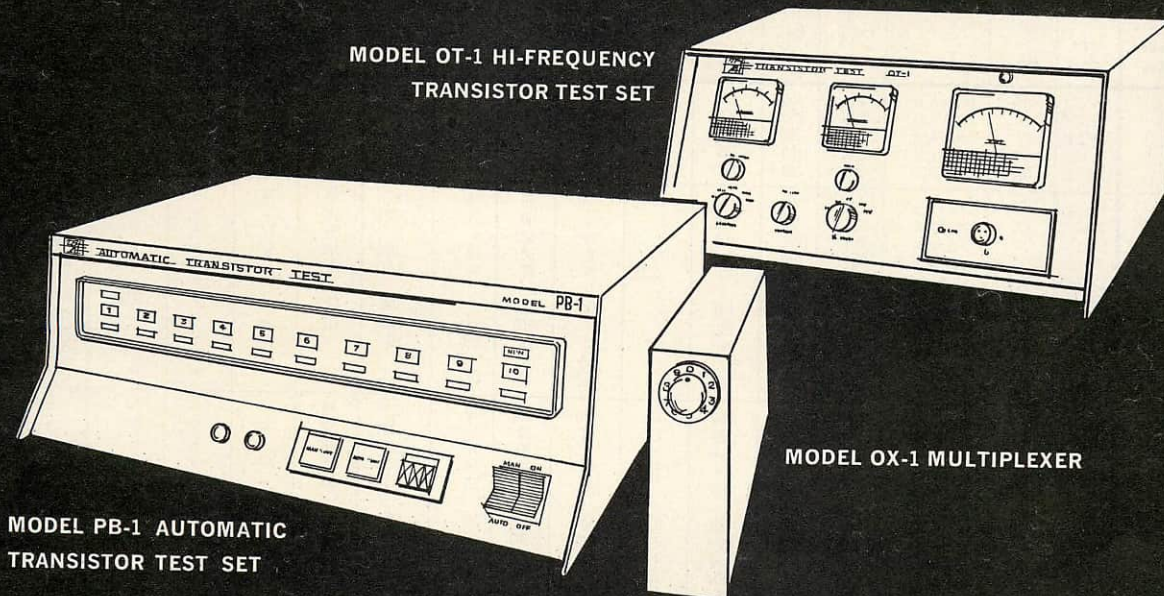

- **MODEL PB-1 AUTOMATIC TRANSISTOR TEST SET** — A "go/no go" unit, ideal for quality control and incoming inspection. Completely transistorized and compact, it provides simple, high speed operation at low initial cost.
- **MODEL OT-1 HI-FREQUENCY TRANSISTOR TEST SET** — Measures h_{fe} over a range of 1-10. Individual plug-in units provide frequencies of 20 mc, 100 mc, and 200 mc. Other frequencies available upon request. V_c up to 30 v, I_E up to 100 ma. Overall accuracy $\pm 3\%$.
- **MODEL OX-1 MULTIPLEXER** — A solid state unit utilizing a cold cathode GS10K Dekatron tube for the switching function. The instrument is a programmable 10-channel device with single pole switching; several units can be cascaded to obtain multiple channel input. Sampling rate: d.c. to 10,000/sec. Signal range: ± 10 v.

Write today for full information . . . Baird-Atomic offers the most complete line of Transistor Test equipment.

Engineers and Scientists: Investigate challenging opportunities with B/A. Write Industrial Relations Director. An equal opportunity employer.



BAIRD-ATOMIC, INC.

33 University Road • Cambridge 38, Mass.

ADVANCED OPTICS AND ELECTRONICS... SERVING SCIENCE
ON READER-SERVICE CARD CIRCLE 463

May 24, 1963

T61

LOW LEVEL SWITCHING

Generally types rated under one watt. In order of f_{ae} (f_{ab} or f_T where noted).

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T **f _{ab} (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
					P _c (mw)	T _i (°C)	mW/°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{FE} *h _{FE}	I _{CO} (μa)	C _{oe} *C _{ob} (pf)	t _r (μsec) *t _{on} (nsec)	t _s (μsec) *t _{off} (nsec)	V _{ce(sat)} (v)	
LL 1	2N1034	RA	pnnp,FA,si	0.2	250	160	—	*40	50	15	5	70	—	—	—	SSD, NA, KF
	2N1275	RA	pnnp,FA,si	0.2	250	160	.54	80	100	15	.005	60	—	—	—	KF
	2N1037	RA	pnnp,FA,ge	0.25	250	160	—	*35	50	30	5	70	—	—	—	SSD, NA, KF
	2N329A	CT	pnnp,AJ,si	0.3	250	160	3	35	50	28	.005	70	—	—	—	SSD, NA, KF, AMP
	2N1035	RA	pnnp,FA,si	0.3	250	160	—	*35	50	30	5	70	—	—	—	
LL 2	2N1036	RA	pnnp,FA,si	0.4	250	160	—	*30	50	60	5	70	—	—	—	SSD, NA, KF
	2N1640	CT	pnnp,AJ,si	0.4	250	160	2	20	50	11	.001	50	—	—	—	KF
	C301	CT	pnnp,AJ,si	0.4	250	160	2	70	50	4	5	50	—	—	—	KF
	2N328A	CT	pnnp,AJ,si	0.5	250	160	3	30	50	60	.005	70	—	—	—	KF, RA
	2N329A	SSD	pnnp,AJ,si	**0.5	385	160	2.85	30	50	*88	0.1	70	—	—	—	
	2N1057	GE	pnnp,AJ,ge	0.5	240	100	4	45	300	—	300	40	—	—	0.08	RA, KF, SD
	2N327A	WT	pnnp,AJ,si	0.7	—	200	3	.3	200	15	100	70	—	—	—	Pulse Amp.
	2N670	PH	pnnp,AJ,ge	0.7	300	85	5.0	40	2a	200	20	—	—	—	0.3	Pulse Amp
	2N2670	PH	pnnp,AJ,ge	**0.7	300	85	—	*40	2a	*100	20	—	—	—	—	TO-5 Package, KF
	2N1234	HU	pnnp,AJ,si	0.8	400	160	3	110	100	21	0.1	95	—	—	—	
LL 3	2N1244	HU	pnnp,AJ,si	0.8	1000	160	7.4	110	200	20	0.1	95	—	—	—	Coaxial package
	2N1641	CT	pnnp,AJ,si	0.8	250	160	2	10	50	15	.001	50	—	—	—	
	C302	CT	pnnp,AJ,si	0.8	250	160	2	8	50	12	.2	50	—	—	—	RA, SSD, KF
	2N327A	HU	pnnp,AJ,si	1.0	385	160	3	50	100	14	0.1	95	—	—	—	WT, RA, SSD, JA, KF
	2N328A	HU	pnnp,AJ,si	1.0	385	160	3	50	100	25	0.1	95	—	—	—	
	2N329A	HU	pnnp,AJ,si	1.0	385	160	3	50	100	50	10	95	—	—	—	WT, RA, SSD, NA, KF
	2N331	RCA	pnnp,AJ,ge	1.0	200	85	3	*30	200	—	16	—	—	—	0.09	BE, US, MO
	2N1056	GE	pnnp,AJ,ge	1.0	240	100	4	50	300	25	25	40	—	—	—	Neon indicator
	2N2370	NA	pnnp,si	1.0	200	200	1.4	15	50	15	0.005	15	—	—	—	2.5db NF
	2N2371	NA	pnnp,si	1.0	200	200	1.4	15	50	20	0.005	15	—	—	—	2.5 db NF
LL 4	2N2372	NA	pnnp,si	1.0	150	200	0.86	15	50	15	0.005	15	—	—	—	2.5 db NF
	2N2373	NA	pnnp,si	1.0	150	200	0.86	15	50	20	0.005	15	—	—	—	2.5 db NF
	TS605	TS	pnnp,AJ,ge	**1.0	150	100	—	12	400	*15	10	—	—	—	—	
	TS606	TS	pnnp,AJ,ge	**1.0	150	100	—	20	400	*15	10	—	—	—	—	WT, KF, SSD
	2N1228	HU	pnnp,AJ,si	1.2	400	160	3	*15	100	20	0.1	95	—	—	—	
	2N1229	HU	pnnp,AJ,si	1.2	400	160	3	15	100	36	0.1	95	—	—	—	WT, NA, KF, AMP, SSD
	2N1230	HU	pnnp,FJ,si	1.2	400	200	—	*35	500	14	0.1	100	—	—	—	WT, NA, KF, SSD, AMP
LL 5	2N1231	HU	pnnp,FJ,si	1.2	400	200	—	*35	500	24	0.1	100	—	—	—	WT, NA, KF, SSD, AMP
	2N1232	HU	pnnp,FJ,si	1.2	400	200	—	65	500	14	0.1	100	—	—	—	WT, NA, KF, SSD, AMP
	2N1233	HU	pnnp,FJ,si	1.2	400	200	—	65	500	24	0.1	100	—	—	—	WT, NA, KF, SSD, AMP
	2N1234	HU	pnnp,FJ,si	1.2	400	200	—	110	500	14	0.1	100	—	—	—	WT, NA, KF, SSD
	2N1238	HU	pnnp,AJ,si	1.2	1000	160	7.4	15	200	20	0.1	95	—	—	—	Coaxial package
	2N1239	HU	pnnp,AJ,si	1.2	1000	160	7.4	15	200	36	0.1	95	—	—	—	Coaxial package
	2N1240	HU	pnnp,AJ,si	1.2	1000	160	7.4	35	200	20	0.1	95	—	—	—	Coaxial package
	2N1241	HU	pnnp,AJ,si	1.2	1000	160	7.4	35	200	36	0.1	95	—	—	—	Coaxial package
	2N1242	HU	pnnp,AJ,si	1.2	1000	160	7.4	60	200	20	0.1	95	—	—	—	Coaxial package
	2N1243	HU	pnnp,AJ,si	1.2	1000	160	7.4	60	200	36	0.1	95	—	—	—	Coaxial package
LL 6	2N1642	CT	pnnp,AJ,si	1.2	250	160	2	6	50	23	.005	50	—	—	—	Field effect
	C106	CT	pnnp,AJ,si	1.2	250	160	2	10	50	50	50	50	—	—	—	
	OC122	AMP	pnnp,AJ,ge	1.3	300	90	4.5	*32	500	180	—	—	—	—	—	
	2N312	SY	pnnp,AJ,ge	1.5	100	85	1.66	15	200	—	15	—	1.5	2	0.075	US, KF, TI
	2N519	IND	pnnp,AJ,ge	1.5	150	85	2.5	15	200	25	1	14	1.3	0.7	—	US, KF
	2N519A	IND	pnnp,AJ,ge	1.5	150	85	2.5	25	200	25	1	14	1.3	0.7	—	
	B1154	BE	pnnp,AJ,ge	1.5	400	100	.15	40	300	—	10	20	1.5	—	.25	
	B1154A	BE	pnnp,AJ,ge	1.5	400	100	.15	60	300	—	15	20	1.5	—	.25	
	OC123	AMP	pnnp,AJ,ge	1.5	300	90	4.5	*50	500	160	—	—	—	—	—	KF
	2N328A	SSD	pnnp,FA,si	2	385	160	2.85	40	50	30	5	70	—	—	—	
LL 7	2N536	PH	pnnp,AJ,ge	**2	50	85	—	*20	30	50	4.0	—	—	—	0.07	
	2N679	SY	pnnp,AJ,ge	2	150	85	2.5	20	200	—	25	—	5	5	—	
	2N1220	SSD	pnnp,AJ,si	**2	250	175	1.7	25	100	*9	0.1	18	—	—	—	
	2N1222	SSD	pnnp,AJ,si	**2	250	175	1.7	40	100	6	0.1	15	—	—	—	
	2N1223	SSD	pnnp,AJ,si	**2	250	175	1.7	40	100	6	0.1	15	—	—	—	
	2N1446	IND	pnnp,AJ,ge	2	200	85	3.33	45	400	30	5	—	—	—	—	
	OC80	AMP	pnnp,PADT,ge	2	550	75	—	*32	600	85	10	—	0.7	—	—	
	2N438	SY	pnnp,AJ,ge	2.5	100	85	1.6	30	—	20	10	—	—	—	—	
	2N817	RA	pnnp,AJ,ge	2.5	75	85	1.25	30	400	20	10	20	—	—	—	Submin
	2N818	RA	pnnp,AJ,ge	2.5	75	85	1.25	30	400	20	10	20	—	—	—	Submin
2N356	SY	pnnp,AJ,ge	3	100	85	1.6	20	500	—	25	—	1.0	0.3	0.6	GI	
2N356A	GI	pnnp,AJ,ge	3	150	100	2	30	500	—	3	14	1.5	0.3	0.18	SY, TI	
2N520	KF	pnnp,AJ,ge	3	150	100	2	20	—	20(min)	25	—	—	—	—	TI	

LL *continued*

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T **f _{ab} (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
					P _c (mw)	T _j (°C)	mW/°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{FE} *h _{FE}	I _{CO} (μa)	C _{oe} *C _{ob} (pf)	t _r (μsec) *t _{on} (nsec)	t _s (μsec) *t _{off} (nsec)	V _{ce(sat)} (v)	
LL 8	2N801	RA	pn-p, A, ge	3	75	85	1.25	30	400	30	4	20	—	—	—	Submin
	2N802	RA	pn-p, A, ge	3	75	85	1.25	30	400	30	4	20	—	—	—	Submin
	2N1051	WE	pn-p, A, si	*3	250	150	4.0	40	100	30	0.1	7.0	—	—	—	—
	2N1302	TI	pn-p, A, ge	**3	150	—	—	25	300	*20	6	*20	—	—	0.4	—
	2N1447	IND	pn-p, A, ge	3	200	85	3.33	45	400	45	5	—	—	—	—	—
	2N1993	TI	pn-p, A, ge	**3	300	100	4.0	*30	300	*120	4	*13	0.2	0.7	0.07	KF, US
LL 9	2N1353	IND	pn-p, A, ge	3.5	200	85	3.33	15	200	70	2.5	12	.6	.4	0.1	KF, US
	2N3854	SY	pn-p, A, ge	4	150	100	2	*40	200	30-110	40	—	—	—	—	GI, TI
	2N4044	RCA	pn-p, A, ge	4	150	100	—	40	150	30	5	20	—	—	—	GI, IND, TS, KF, TI
	2N425	SY	pn-p, A, ge	4	150	85	2.5	20	400	—	2.0	14	1.0	0.3	0.2	RA, IND, TS, US, KF, GI
	2N799	RA	pn-p, A, ge	4	75	85	1.25	25	150	30	5	20	—	—	—	Submin
	2N800	RA	pn-p, A, ge	4	75	85	1.25	25	150	20	5	20	—	—	—	Submin
LL 10	2N824	RA	pn-p, A, ge	4	75	85	1.25	25	100	40	5	20	—	—	—	Submin
	2N1027	SSD	pn-p, A, si	*4	250	176	1.7	*18	100	18	.025	7	—	—	—	NA, SSD, KF
	2N1028	SSD	pn-p, A, si	*4	250	175	1.7	*10	100	9	.025	7	—	—	—	NA, KF
	2N1404	TI	pn-p, A, ge	**4	300	100	4.0	*25	300	*90	3	*13	0.18	0.8	0.08	—
	2N1448	IND	pn-p, A, ge	4	200	85	3.33	45	400	65	5	20	—	—	—	GI, RCA
	2N1605A	SY	pn-p, A, ge	4	200	100	2.6	40	200	40	10	20	—	—	—	—
LL 11	2N1780	SY	pn-p, A, ge	4	100	100	1.3	25	100	30-110	10	20	—	—	—	—
	2N1781	SY	pn-p, A, ge	4	100	100	1.3	25	100	40	5	20	—	—	—	—
	2N1808	TI	pn-p, A, ge	**4	300	85	5.0	*25	300	*120	3	*13	0.2	0.7	0.07	—
	2N2000	TI	pn-p, A, ge	4	300	100	4	50	750	—	8	30	—	—	—	TI, KF, PH
	2N395	GE	pn-p, A, ge	**4.5	500	100	6.67	*30	200	*100	6	*14	0.55	0.5	0.6	US, KF
	2N520	IND	pn-p, A, ge	4.5	150	85	2.5	15	200	40	1	14	0.9	0.7	—	US, KF, TI
LL 12	2N520A	IND	pn-p, A, ge	4.5	150	85	2.5	25	200	100	1	14	—	—	—	—
	2N1169	SY	pn-p, A, ge	4.5	120	85	2	25	400	20	50	20	—	—	—	RCA
	2N1170	SY	pn-p, A, ge	4.5	120	85	2	25	400	20	50	20	—	—	—	RCA
	2N1302	TI	pn-p, A, ge	4.5	150	85	2.5	25	300	—	5	11	.70	.50	.1v	TO-5, SY, GI, RCA
	2N1303	TI	pn-p, A, ge	4.5	150	85	2.5	*30	300	—	3	16	.40	.90	.1v	GI, KF, AMP
	2N1354	IND	pn-p, A, ge	4.5	200	85	3.33	30	200	70	2.5	12	.55	.5	0.1	KF, US
LL 13	2N123	SY	pn-p, A, ge	5	100	85	1.66	15	125	30-150	0.6	—	—	—	0.2	—
	2N315	GI	pn-p, A, ge	5	100	85	2	*20	500	—	1	14	1.0	0.2	0.12	KF, IND, US
	2N315A	RA	pn-p, A, ge	5	150	100	2	*30	200	70	1	14	0.9	0.4	0.12	IND, US, KF
	2N388A	RCA	pn-p, A, ge	5	150	100	—	*40	200	*30	5	20	1	0.7	—	—
	2N396A	SY	pn-p, A, ge	5	150	100	2	30	200	30-150	6	—	—	—	—	TS, KF, GE, GI, RCA
	2N414	SY	pn-p, A, ge	5	150	85	2.5	*30	200	30-90	5	—	—	—	—	KF, GI, US, TS
LL 14	2N439	SY	pn-p, A, ge	5	100	85	1.66	*20	—	—	10	—	0.5	0.7	0.25	—
	2N450	GE	pn-p, A, ge	5	150	85	2.5	12	125	—	6	20	—	—	0.2	—
	2N576	SY	pn-p, A, ge	5	200	100	2.6	20	400	—	20	—	2	1	0.4	—
	2N578	RCA	pn-p, A, ge	5	120	71	—	20	400	15	**3	—	0.85	0.33	0.2	—
	2N585	RCA	pn-p, A, ge	5	120	71	—	25	200	40	3	—	0.35	0.25	0.1	SY, GI, TI
	2N658	RA	pn-p, A, ge	5	150	85	1.25	16	1a	—	2.5	12	—	—	0.25	KF
LL 15	2N803	RA	pn-p, A, ge	5	75	85	1.25	30	400	40	4	20	—	—	—	Submin
	2N804	RA	pn-p, A, ge	5	75	85	1.25	30	400	40	4	20	—	—	—	Submin
	2N815	RA	pn-p, A, ge	5	75	85	1.25	25	200	60	10	20	—	—	—	Submin
	2N816	RA	pn-p, A, ge	5	75	85	1.25	25	200	60	10	20	—	—	—	Submin
	2N819	RA	pn-p, A, ge	5	75	85	1.25	30	400	30	10	20	—	—	—	Submin
	2N820	RA	pn-p, A, ge	5	75	85	1.25	30	400	30	10	20	—	—	—	Submin
LL 16	2N825	RA	pn-p, A, ge	5	75	85	1.25	30	200	30	6	20	—	—	—	Submin
	2N826	RA	pn-p, A, ge	5	75	85	1.25	30	200	30	6	20	—	—	—	Submin
	2N1012	GI	pn-p, A, ge	5	150	100	2	*40	—	—	5	—	0.1	0.1	0.1	—
	2N1219	SSD	pn-p, A, si	**5	250	175	1.7	25	100	*18	0.1	15	—	—	—	—
	2N1221	SSD	pn-p, A, si	**5	200	175	1.7	25	100	20	.005	*15	—	—	—	—
	2N1348	IND	pn-p, A, ge	5	200	85	3.33	40	400	95	5	12	—	—	—	—
LL 17	2N1449	IND	pn-p, A, ge	5	200	85	3.33	45	400	80	5	—	—	—	—	—
	2N1994	TI	pn-p, A, ge	5	150	85	2.5	30	300	—	5	11	1.1	1.5	—	—
	GT1658	GI	pn-p, A, ge	5	150	100	2	*30	400	50	3	10	—	—	—	—
	KGS1005	KF	pn-p, A, ge	5	200	85	5.2	30	400	40	12	—	—	—	—	—
	2N357	SY	pn-p, A, ge	6	100	85	1.6	*15	500	—	25	—	—	—	—	—
	2N357A	GI	pn-p, A, ge	6	150	100	2	30	500	90	3	14	0.5	0.5	0.18	GI, TI
LL 18	2N377	SY	pn-p, A, ge	6	150	100	2	*20	200	—	10	—	2.5	0.7	—	—
	2N426	SY	pn-p, A, ge	6	150	85	2.5	*40	200	—	2	14	1.0	0.3	0.22	GE, GI, TI
	2N789	RA	pn-p, DB, si	6	—	—	1.4	45	25	15	.002	5	—	—	—	RA, TS, GI, US, TI, KF
	2N902	RA	pn-p, DB, si	6	—	—	—	45	25	15	.002	5	—	—	—	Submin
	2N1319	RCA	pn-p, A, ge	6	120	71	—	20	400	30	2.5	—	20	—	—	TI
	2N1343	IND	pn-p, A, ge	6	150	85	2.5	20	400	40	3	12	1.0	—	—	—
LL 19	2N1997	TI	pn-p, A, ge	6	250	100	3.3	45	—	4	15	—	—	—	—	—
	2N2181	PH	pn-p, A, ge	*6	150	140	1.3	*25	50	10	0.01	*12	—	—	—	—
	2N2182	PH	pn-p, SAT, si	*6	150	140	1.3	*25	50	10	0.01	*12	—	—	—	—
	2N2183	PH	pn-p, SAT, si	*6	150	140	1.3	*15	50	10	0.01	*12	—	—	—	—
	2N2184	PH	pn-p, SAT, si	*6	150	140	1.3	*15	50	10	0.01	*12	—	—	—	—
	2N2185	PH	pn-p, SAT, si	*6	150	140	1.3	*15	50	10	0.01	*12	—	—	—	—

600 mc f_T Switches...

120V V_{CB} Core Drivers...

100 mc Amplifier...

All Available Now with...

PHILCO SILICON PLANAR RELIABILITY

Philco's versatile line of Epitaxial Silicon Planar NPN Transistors enables you to upgrade reliability in transistor applications.

ULTRA HIGH SPEED SWITCHES

TYPE*	Maximum Ratings			Characteristics							
	T_S °C.	V_{CB} volts	P_T @25°C. mw	I_{CBO} max. μ a	h_{FE} min.	$V_{CE(SAT)}$ max. volts	f_T min. mc	C_{ob} max. pf	t_s max. nsec	t_{on} max. nsec	t_{off} max. nsec
2N709	300	15	300	0.05	20	0.30	600	3	6	15	15
T-2877	300	15	300	0.05	20	0.30	500	3	8	17	17

*TO-18 case—collector internally connected to case.

CORE DRIVERS/PULSE AMPLIFIERS

TYPE*	V_{CB} max. volts	f_T @ 50 ma mc	h_{FE} @ 150 ma
2N1893	120	50	40
2N1613	75	60	40

*TO-5 case—collector internally connected to case.


100 mc LOW-NOISE AMPLIFIER

Industry's Newest Silicon Amplifier Standard

TYPE	Power Gain	Maximum Noise Figure	Minimum BV_{CEO}
T-2857*	15-22db @100 mc	5db @100 mc	20 volts

The new Philco T-2857 is industry's first silicon amplifier transistor to be functionally tested at 100 mc for fixed-matched, fixed neutralized, and fixed-bias performance. This insures interchangeability in practical communications circuits.

*TO-18 case with 4 leads—collector isolated from case.



Whatever your silicon transistor application, evaluate Philco Planar Transistors.

For complete data, and new Reliability report, write Dept. ED52463.

ON READER-SERVICE CARD CIRCLE 464



VERY HIGH SPEED SWITCHES

These Philco Types Feature Industry's Best Combination of Voltage, Switching Speed, and Beta.

TYPE†	Maximum Ratings					Characteristics							
	T _s °C.	V _{CB0} volts	V _{CE0} volts	P _T @ 25° C. mw	I _C ma	I _{CB0} max. μa	h _{FE} min.	V _{CE} (SAT) max. volts	f _T min. mc	C _{ob} max. pf	t _s max. nsec	t _{on} max. nsec	t _{off} max. nsec
2N2710	300	40	20	360	500	0.03	40	0.25	500	4	15	20	35
2N2651	300	40	20	360	500	0.03	25	0.25	350	4	25	35	75
2N914	300	40	15	360	500	0.025	30	0.25	300	6	20	40 @ 200 ma	40 @ 200 ma
2N834	175	40	30**	300	200	0.50	25	0.25	350	4	25	35	75
2N784A	300	40	15	350	200	0.025	25	0.19	300	3.5	15	20	40
2N708	300	40	15	360		0.025	30	0.40	300	6	25		
2N706	175	25	20*	300	50	0.5	20	0.60	200	6	60		

*V_{CEr}

**V_{CEs}

†T0-18 case—collector internally connected to case.

PHILCO®

A SUBSIDIARY OF *Ford Motor Company*

LANSDALE DIVISION, LANSDALE, PA.



LL continued

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T *f _{ab} (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
					P _c (mw)	T _i (°C)	m _w /°C	V _{CEO} CBO (v)	I _C (ma)	h _{fe} *h _{FE}	I _{CO} (μa)	C _{oe} C _{ob} (pf)	t _r (μsec) *t _{on} (nsec)	t _s (μsec) *t _{off} (nsec)	V _{ce(sat)} (v)	
LL 15	2N2184	PH	pnnp,SAT,si	*6	150	140	1.3	*15	50	*15	0.0003	*12	—	—	—	Pair 2N2183 Chopper 2N2274 chopper 2N2276
	2N2274	PH	pnnp,SP,si	*6	150	140	1.3	25	50	10	0.045	9	—	—	—	
	2N2275	PH	pnnp,SP,si	*6	150	140	1.3	25	50	10	0.045	9	—	—	—	
	2N2276	PH	pnnp,SP,si	*6	150	140	1.3	15	50	10	0.003	9	—	—	—	
	2N2277	PH	pnnp,SP,si	*6	150	140	1.3	15	50	10	0.003	9	—	—	—	
	2N2185	PH	pnnp,SP,si	*6.5	150	140	1.3	30	50	—	0.001	9	—	—	—	chopper M. Pair 2N2185
	2N2186	PH	pnnp,SP,si	*6.5	150	140	1.3	30	50	—	0.001	9	—	—	—	
2N2187	PH	pnnp,SP,si	*6.5	150	140	1.3	30	50	—	0.001	9	—	—	—	—	GI
2N100	SY	npn,AJ,ge	7	150	100	2	40	—	25(min)	15	—	—	—	—	—	
2N1090	RCA	npn,AJ,ge	7	120	85	—	25	400	50	4	—	0.25	0.20	—	—	
LL 16	2N1114	SY	npn,AJ,ge	7	150	100	2	*15	200	—	30	—	—	—	—	TI Chopper 2N2278
	2N1995	TI	npn,AJ,ge	7	150	85	2.5	25	300	—	5	11	—	—	—	
	GT123	GI	pnnp,AJ,ge	7	150	150	2	*25	—	40	3	15	0.9	0.5	0.1	
	2N2278	PH	pnnp,SAT,si	*7.6	150	140	1.3	15	50	—	0.001	9	—	—	—	
	2N2279	PH	pnnp,SAT,si	*7.6	150	140	1.3	15	50	—	0.001	9	—	—	—	
	2N123	GE	pnnp,AJ,ge	8	150	85	2.5	15	125	0.987	6	15	0.45	0.90	0.15	SY SY, GE, RA, TI TI, GI, SY, KF
	2N388	GI	npn,AJ,ge	8	150	100	2	*25	500	—	5	10	0.6	0.4	—	
	2N396	GE	pnnp,AJ,ge	8	200	100	3.3	20	200	—	6	12	0.4	0.6	0.08	
	2N396A	PH	pnnp,AJ,ge	*8	500	100	6.67	*30	200	*100	6	*14	.25	.15	.15	
	2N576A	SY	npn,AJ,ge	8	200	100	2.6	40	400	—	40	—	2	1	0.4	
LL 17	2N579	RCA	pnnp,AJ,ge	8	120	71	—	20	400	30	3	—	0.36	0.33	0.2	IND, US, KF, GI US,IND,GI,KF,TI
	2N581	RCA	pnnp,AJ,ge	8	150	85	—	18	100	30	3	12	0.20	0.20	0.35	
	2N583	RCA	pnnp,AJ,ge	8	120	85	—	18	100	30	3	12	0.20	0.20	0.35	
	2N597	PH	pnnp,AJ,ge	*8	250	100	3.3	*45	500	*70	3.5	*15	—	—	0.085	
	2N598	PH	pnnp,AJ,ge	8	250	100	3.3	*35	500	125*	3	*15	—	—	0.085	
	2N600	PH	pnnp,AJ,ge	*8	750	100	10	*35	500	*125	3	*15	—	—	0.085	MIL KF Submin Submin
	2N662	RA	pnnp,FA,ge	8	150	85	—	11	1a	—	2.5	12	—	—	0.25	
	2N714	RCA	pnnp,AJ,ge	8	150	85	—	30	200	80	2	11	—	—	—	
	2N790	RA	npn,DB,si	8	—	—	1.4	45	25	30	.002	8	—	—	—	
	2N792	RA	npn,DB,si	8	—	—	1.4	45	25	60	.002	5	—	—	—	
LL 18	2N903	RA	npn,DB,si	8	—	—	—	45	25	30	.002	20	—	—	—	Submin Submin
	2N905	RA	npn,DB,si	8	—	—	—	45	25	80	.002	20	—	—	—	
	2N1280	IND	pnnp,AJ,ge	8	200	85	3.33	16	400	60	5	10	.10	—	—	
	2N1284	IND	pnnp,AJ,ge	8	150	85	2.5	20	400	90	2	15	.45	.9	15	
	2N1304	TI	npn,AJ,ge	8	150	85	2.5	*25	300	110	5	16	.45	.50	.1v	
	2N1305	TI	pnnp,AJ,ge	8	150	85	2.5	*30	300	100	3	11	.28	.80	.1v	TO-5,GI,SY,GE,AMP TO-5, KF, GI, AMP KF KF US
	2N1347	IND	pnnp,AJ,ge	8	150	85	2.5	20	200	80	2.5	12	—	—	—	
	2N1350	IND	pnnp,AJ,ge	8	200	85	3.33	50	400	95	10	12	—	—	—	
	2N1351	IND	pnnp,AJ,ge	8	200	85	3.33	40	400	65	5	12	—	—	—	
	2N1355	IND	pnnp,AJ,ge	8	200	85	3.33	30	200	80	2.5	12	.4	.6	0.08	
LL 19	2N1356	IND	pnnp,AJ,ge	8	200	100	2.66	30	200	80	2.5	12	.4	.6	0.08	US
	2N1478	PH	pnnp,AJ,ge	*8	250	100	3.3	*30	500	*70	3.5	*15	—	—	.085	
	2N1685	SY	npn,AJ,ge	8	100	100	1.3	25	200	40	10	20	—	—	—	
	2N2001	TI	pnnp,AJ,ge	8	300	100	4	30	750	—	5	30	—	—	—	
	2N2177	SSD	pnnp,AJ,si	*8	100	175	0.7	6	50	*95	*0.5	10	—	—	—	
	2N2178	SSD	pnnp,AJ,si	*8	100	175	0.7	6	50	*95	*0.5	10	—	—	—	USAF2N167-MIL SY, TI GI KF
	2N167	GE	npn,GJ,ge	9	65	85	1.1	30	75	0.985	1.5	2.5	0.4	0.7	0.35	
	2N358	GI	npn,AJ,ge	9	100	85	2	20	500	60	3	14	0.4	0.5	0.18	
	2N358A	SY	npn,AJ,ge	9	150	100	2	*30	500	25-75	5	14	—	—	—	
	2N394	GE	pnnp,AJ,ge	9	150	85	2.5	10	200	—	6	12	—	—	0.04	
LL 20	2N823	RA	npn,AJ,ge	9	75	85	1.25	25	100	40	5	20	—	—	—	Submin
	2N1198	GE	npn,RG,ge	9	65	85	1.1	25	75	—	1.5	2.5	0.4	0.7	0.35	
	2N2274	PH	pnnp,SP,si	*9	150	140	1.3	*25	50	*15	.003	*6	—	—	—	
	2N2275	PH	pnnp,SP,si	*9	150	140	1.3	*25	50	*15	.003	*6	—	—	—	
	2N2276	PH	pnnp,SP,si	*9	150	140	1.3	*15	50	*15	.003	*6	—	—	—	
	2N2277	PH	pnnp,SP,si	*9	150	140	1.3	*15	50	10	0.003	*9	—	—	—	pair 2N2276 GI, TI US, KF
	2N397	RCA	pnnp,AJ,ge	10	150	85	—	30	200	*40	6	*20	—	—	0.2	
2N440	SY	npn,AJ,ge	10	100	85	1.66	*15	—	—	10	—	0.3	0.7	0.25		
2N518	GE	pnnp,AJ,ge	10	150	85	2.5	12	125	—	6	12	0.8	0.9	0.15		
2N521	IND	pnnp,AJ,ge	10	150	85	2.5	15	200	70	1	14	—	—	—	—	
LL 21	2N521A	IND	pnnp,AJ,ge	10	150	85	2.5	25	200	150	1	14	0.2	0.5	—	US, KF
	2N600	PH	pnnp,AJ,ge	10	750	100	10	35	500	—	10	15	—	—	0.085	
	2N659	RA	pnnp,FA,ge	10	150	85	—	14	1a	—	2.5	12	—	—	0.25	
	2N745	RA	npn,MS,si	10	150	175	0.75	45	50	22	10	3	—	—	—	
	2N805	RA	pnnp,AJ,ge	10	75	85	1.25	30	400	60	4	20	—	—	—	
	2N806	RA	pnnp,AJ,ge	10	75	85	1.25	30	400	60	4	20	—	—	—	Submin Submin Submin
	2N821	RA	npn,AJ,ge	10	75	85	1.25	30	400	40	10	20	—	—	—	
	2N822	RA	npn,AJ,ge	10	75	85	1.25	30	400	40	10	20	—	—	—	
	2N1281	IND	pnnp,AJ,ge	10	200	85	3.33	16	400	90	5	10	.9	—	—	
	2N1349	IND	pnnp,AJ,ge	10	200	85	3.33	40	400	110	5	12	—	—	—	



Obsoletes the Silicon Alloy Transistor

with a complete line of

Bed Mounted, Passivated Epitaxial Junction PNP Silicon Transistors

Featuring

HIGH V_{eb}	LOW OFFSET VOLTAGE
ULTRA LOW LEAKAGE	HIGH FREQUENCY
<u>RELIABILITY</u>	

These transistors are available in TO-5, TO-18, TO-46 and Molytab packages.

Typical Specifications for Low Level Chopper Circuits			
Characteristic	Type Designation		
	C9001	C9002	C9003
V_{cb} and V_{eb} ($I_b = 10^{-10}a$)	15v	25v	40v
V_{ce}	10v	20v	35v
I_{cbo} and I_{ebo} (100°C)	3nA	3nA	3nA
V_o ($I_b = 200 \mu a$; $I_e = 0$)	0.3mV	0.5mV	0.8mV
Beta at 1mc ($I_c = 1ma$; $V_{ce} = 6v$)	30	20	10
Dissipation (case temp. = 25°C)	2 watts	2 watts	2 watts
Max. Operating Temperature	200°C	200°C	200°C
Package	TO-46	TO-46	TO-46

In addition, virtually all present PNP types can be supplied in this new construction in quantities and at competitive prices for direct replacement in existing circuits.

Write or call to discuss your requirements.

crystalonics 147 SHERMAN STREET, CAMBRIDGE 40, MASS., TELEPHONE: (617) 491-1670

LL continued

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T *f _{ab} (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING				Remarks
					P _c (mw)	T _j (°C)	mW/°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{fe} *h _{FE}	I _{CO} (μa)	C _{oe} *C _{ob} (pf)	t _r (μsec) *t _{on} (nsec)	t _s (μsec) *t _{off} (nsec)	V _{ce(sat)} (v)		
LL 22	2N1996	TI	npn,AJ,ge	10	150	85	2.5	20	300	—	5	11	—	—	—	Chopper Chopper Pair 2N2185	
	2N1998	TI	npn,AJ,ge	10	250	100	3.3	35	400	—	4	15	—	—	—		
	2N2185	PH	npn,SP,si	10	150	140	1.3	*30	50	—	0.001	*6	—	—	—		
	2N2186	PH	npn,SP,si	10	150	140	1.3	*30	50	—	0.001	*9	—	—	—		
	2N2187	PH	npn,SP,si	10	150	140	1.3	*30	50	—	0.001	*6	—	—	—		
	2N2648	GI	npn,AJ,ge	**10	250	100	3.3	*35	1a	*80-500	3	*18	.12	.6	.2	KF, TS, TI, IND, RA, US Submin Submin	
	R212	TS	npn,AJ,ge	**10	0—	85	—	30	400	*20	—	*200	5	*20	0.105		
2N427	GI	npn,AJ,ge	11	150	100	2	*30	—	—	2	14	0.43	0.3	—			
2N791	RA	npn,DB,si	11	—	—	1.4	45	25	60	.002	5	—	—	—			
2N904	RA	npn,DB,si	11	—	—	—	45	25	60	.002	20	—	—	—			
LL 23	2N316	GI	npn,AJ,ge	12	100	85	2	*20	500	—	1	14	0.4	0.4	0.14	KF IND, US, KF TI, KF US,GE,RA,GI,SY,KF, PH, TI, AMP	
	2N316A	GI	npn,AJ,ge	12	150	100	2	*30	500	130	1	14	0.4	0.4	0.14		
	2N397	GE	npn,AJ,ge	12	200	100	3.3	15	200	—	6	12	0.3	0.7	0.07		
	2N404	RCA	npn,AJ,ge	12	120	85	—	*25	100	—	5	—	0.17	0.20	0.12		
	2N428A	GI	npn,ge	12	150	100	2	*0.25	10	100	5	20	0.43	0.3	0.22		
	2N635	GE	npn,AJ,ge	12	150	85	2.5	20	300	—	5	—	—	—	—	TO-5,GI,SY,GE,AMP TO-5, GI, KF,AMP KF, TI KF	
	2N1306	TI	npn,AJ,ge	12	150	85	2.5	*25	300	110	5	16	.22	.50	.1v		
	2N1307	TI	npn,AJ,ge	12	150	85	2.5	*30	300	110	3	11	.20	.80	.1v		
	2N1313	IND	npn,AJ,ge	12	175	85	—	*30	400	80	—	14	—	—	—		
	2N1344	IND	npn,AJ,ge	12	150	85	2.5	15	400	90	5	12	0.7	0.3	—		
LL 24	2N1345	IND	npn,AJ,ge	12	150	85	2.5	10	400	60	3	14	.3	.4	—	KF KF Chopper Pair 2N2278	
	2N1346	IND	npn,AJ,ge	12	150	85	2.5	12	400	125	2.5	14	.3	.4	.10		
	2N1357	IND	npn,AJ,ge	12	200	85	3.33	30	200	85	2.5	12	.3	.7	0.07		
	2N2278	PH	npn,SAT,si	*12	150	140	1.3	*15	50	—	0.001	*6	—	—	—		
	2N2279	PH	npn,SAT,si	*12	150	140	1.3	*15	50	—	0.001	*6	—	—	—		
	2N269	RCA	npn,AJ,ge	13	120	85	—	25	100	40	2	—	0.17	0.20	0.12	Submin Submin GI KF, RCA, TI	
	2N793	RA	npn,DB,si	13	—	—	1.4	45	25	150	.002	5	—	—	—		
	2N906	RA	npn,DB,si	13	—	—	—	45	25	150	.002	20	—	—	—		
	2N1091	RCA	npn,AJ,ge	13	120	85	—	25	400	70	4	—	0.20	0.17	—		
	2N582	SY	npn,AJ,ge	14	120	71	2.6	*25	100	40(min)	5	—	—	—	—		
LL 25	2N584	RCA	npn,AJ,ge	**14	120	85	—	25	100	60	2	12	0.15	0.17	0.2	US Submin Submin SPR SPR	
	2N807	RA	npn,AJ,ge	14	75	85	1.25	25	100	40	5	20	—	—	—		
	2N808	RA	npn,AJ,ge	14	75	85	1.25	25	100	40	5	20	—	—	—		
	2N858	PH	npn,SP,si	14	150	140	1.3	*40	50	33	.1	5	—	—	—		
	2N859	PH	npn,SP,si	14	150	140	1.3	*40	50	65	.1	5	—	—	—		
	2N860	PH	npn,SA,si	14	150	140	1.3	*25	50	33	.1	5	—	—	—	SPR SPR GI,IND,US,TS,KF TI KF, TI	
	2N862	PH	npn,SP,si	14	150	140	1.3	*15	50	33	.1	5	—	—	—		
	2N580	RCA	npn,AJ,ge	15	120	71	—	20	400	45	3	—	0.16	0.29	0.2		
	2N636A	SY	npn,AJ,ge	15	150	100	2	*25	300	100-300	6	20	—	—	—		
	2N650	RA	npn,FA,ge	15	150	85	—	11	1a	—	2.5	12	—	—	0.25		
LL 26	2N1282	IND	npn,AJ,ge	15	200	85	3.33	16	400	100	5	10	.8	—	—	KF KF	
	2N1316	IND	npn,AJ,ge	15	200	85	3.33	30	400	100	2	14	—	—	—		
	2N1317	IND	npn,AJ,ge	15	200	85	3.33	20	400	95	3	14	—	—	—		
	2N1318	IND	npn,AJ,ge	15	200	85	3.33	10	400	85	4	14	—	—	—		
	2N1999	TI	npn,AJ,ge	15	250	100	3.33	30	400	—	4	15	—	—	—		
	2N388A	TI	npn,AJ,ge	**16	150	—	—	40	200	*60-180	5	*20	—	—	—	MIL Chopper 2N2280	
	2N599	PH	npn,AJ,ge	*16	250	100	3.3	*30	500	*175	3.5	*15	—	—	0.07		
2N601	PH	npn,AJ,ge	16	750	100	10.0	*30	500	*175	3.5	*15	—	—	*0.07			
2N2280	PH	npn,SAT,si	*16	150	140	1.3	10	50	—	0.003	10	—	—	—			
2N2281	PH	npn,SAT,si	*16	150	140	1.3	10	50	—	0.003	10	10	—	—			
LL 27	2N428	GI	npn,AJ,ge	17	150	100	2	*30	—	—	2	14	0.43	0.3	0.22	SY, RA, IND, US, PH, TS, TI, KF, GE TI US,KF US,KF,TI TS,GI,IND,SY,KF	
	2N636	GE	npn,AJ,ge	17	150	85	2.5	*20	300	—	5	—	—	—	—		
	2N522	IND	npn,AJ,ge	18	150	85	2.5	15	200	120	1	14	—	—	—		
	2N522A	IND	npn,AJ,ge	18	150	85	2.5	*25	200	200	1	14	0.2	0.5	—		
	2N582	RCA	npn,AJ,ge	18	120	85	—	25	100	60	5	—	0.15	0.17	0.2		
	2N584	RCA	npn,AJ,ge	18	120	85	—	25	100	60	2	12	0.15	0.17	0.2	US TO-5,SY,GE,AMP TO-5, KF, GI, AMP	
	2N1308	TI	npn,AJ,ge	18	150	85	2.5	*25	300	200	5	15	—	—	—		
2N1309	TI	npn,AJ,ge	18	150	85	2.5	*30	300	210	3	11	—	—	—			
2N2165	SPR	npn,SP,si	*18	150	—	1.3	*30	—	2.5-4.5	0.02	*10	—	—	—			
2N2166	SPR	npn,SP,si	*18	150	—	1.3	*15	—	2.5-4.5	0.02	*10	—	—	—			
LL 28	2N2377	SPR	npn,SP,si	18	150	140	1.3	*25	50	20	.002	—	—	—	—	TO-18 US, IND, KF IND, US, KF, PH TR, RA, GE, AMP KF, US, TI	
	2N317	GI	npn,AJ,ge	20	100	85	2	*30	500	—	1	14	0.3	0.4	0.18		
	2N317A	GI	npn,AJ,ge	20	150	100	2	*30	500	180	1	14	0.3	0.4	0.18		
	2N337	TI	npn,GD,si	20	125	150	.001	*45	20	19	1	—	0.05	0.02	1.5		
	2N417	IND	npn,AJ,ge	20	200	85	3	*30	200	140	2	12	—	—	—		
	2N496	PH	npn,SAT,si	20	150	140	1.3	*10	50	*25	.001	*6	—	—	.06	MIL KF, TI Submin	
	2N661	RA	npn,FA,ge	20	150	85	—	9	1a	—	2.5	12	—	—	0.25		
	2N746	RA	npn,MS,si	20	150	175	0.75	45	50	45	10	3	—	—	—		
	2N1008	BE	npn,AJ,ge	20	400	85	6.6	20	300	100	10	—	—	—	0.25		
	2N1008A	BE	npn,AJ,ge	20	400	85	6.6	40	300	100	10	—	—	—	0.25		

In POWER WIRE WOUND RESISTORS


if it's news, expect it first from IRC



Transistor circuits and low power applications need this safety feature!

IRC PW Resistors are available with special resistance windings, designed to act as a standard resistor at normal operating wattages and fuse at some specific overload condition. They can also provide positive temperature compensation to offset transistor high temperature avalanching. Thus they offer a standard circuit resistor that can provide fusing or temperature compensating characteristics in one unit at a cost as low as 5 cents each.

These triple-duty resistors come in seven sizes—2, 3, 5, 7, 10, 15 and 20 watts. Write for Bulletin P-7: International Resistance Co., 401 N. Broad Street, Philadelphia 8, Pa.

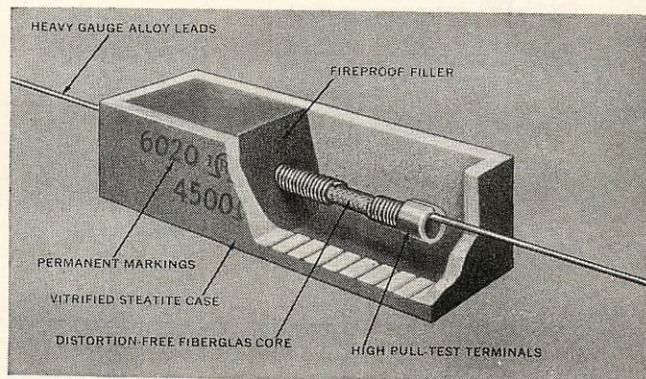

LL continued

Cross Index Key	Type No.	Mfr.	Type	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
				P_c (mw)	T_i (°C)	$m_w/°C$	V_{CEO} V_{CBO} (v)	I_C (ma)	h_{FE} h_{FE}	I_{CO} (μ a)	C_{ob} (pf)	t_r (μ sec) t_{on} (nsec)	t_s (μ sec) t_{off} (nsec)	$V_{ce(sat)}$ (v)	
LL 29	2N1008B	BE	pnp, AJ, ge	400	85	6.6	60	300	100	10	—	—	—	0.25	KF SPR-MIL
	2N1017	US	pnp, FA, ge	20	150	—	10	400	—	2	12	0.25	—	0.25	
	2N1119	PH	pnp, SAT, si	*20	150	1.3	*10	50	*25	.001	6.0	—	—	0.06	
	2N2162	SPR	pnp, SP, si	*20	150	1.3	*10	—	3.5-35	0.01	*10	—	—	—	
	2N2163	SPR	pnp, SP, si	*20	150	1.3	*15	—	3.5-35	0.01	*10	—	—	—	
LL 30	CK419	-RA	npn, FA, si	385	160	—	40	50	15	.005	35	—	—	—	Low noise, low level unit SPR US, KF US, KF Chopper Pair 2N2280
	CK420	RA	npn, FA, si	20	385	—	35	50	30	.005	—	—	—	—	
	CK421	RA	npn, FA, si	20	385	—	30	50	60	.005	20	—	—	—	
	CK474	RA	npn, DB, si	20	250	1.9	40	50	15	.005	20	—	—	—	
	CK475	RA	npn, DB, si	20	250	1.9	35	50	30	.005	20	—	—	—	
LL 31	CK476	RA	npn, DB, si	250	180	1.9	30	50	60	.005	20	—	—	—	Submin TR, RA, NA, GE, AMP *gain-bandwidth, GI *gain bandwidth, GI Submin
	CK477	RA	npn, DB, si	20	250	1.9	30	50	65	.005	20	—	—	—	
	TMT1543	TR	npn, MS, si	20	30	150	6	—	15	0.01	—	—	—	—	
	2N861	PH	pnp, SP, si	22	150	1.3	*25	50	65	0.1	5	—	—	—	
	2N863	PH	pnp, SP, si	22	150	1.3	*15	50	65	0.1	5	—	—	—	
	2N864	PH	pnp, SP, si	22	150	1.3	*6	50	65	0.1	—	—	—	—	
	2N873	IND	pnp, AJ, ge	24	150	2.5	15	200	200	1	14	—	—	—	
	2N873A	IND	pnp, AJ, ge	24	150	2.5	20	200	300	1	14	—	—	—	
	2N2280	PH	pnp, SP, si	*24	150	1.3	*10	50	—	3	7	0.1	0.4	—	
	2N2281	PH	pnp, SP, si	*24	150	1.3	*10	50	—	3	7	—	—	—	
LL 32	2N747	RA	npn, MS, si	25	175	0.75	25	50	30	10	6	—	—	—	NA
	2N748	RA	npn, MS, si	25	175	0.75	25	50	30	10	—	—	—	—	
	2N338	TI	npn, GD, si	30	125	1.50	*45	20	39	1	—	—	—	—	
	2N643	RCA	pnp, DR, ge	30*	120	71	—	30	45	3	2	—	—	—	
	2N645	RCA	pnp, DR, ge	30*	120	71	—	30	45	3	2	—	—	—	
	2N907	RA	npn, DB, si	—	150	2.0	45	25	35	.002	20	—	—	—	
	2N1060	WE	npn, D, ge	30	250	—	40	50	20	0.1	5	—	—	*200	
	2N1276	TI	npn, MS, si	*30	150	—	40	25	9-22	—	—	—	—	—	
	KGS1004	KF	pnp, AJ, ge	32	85	3	10	400	120	12	*10	—	—	—	
	2N2167	SPR	pnp, SP, se	*36	150	1.3	*12	—	4-9	0.02	—	—	—	—	
LL 33	2N842	TR	npn, GJ, si	44	300	1.75	*45	25	20	0.1	6	—	—	—	Submin *gain bandwidth, GI
	2N2164	SPR	pnp, SP, si	*44	150	—	*12	—	6.0-40	0.02	*10	—	—	—	
	TMT842	TR	npn, DJ, si	44	150	175	*45	25	20	0.1	6	—	—	—	
	TMT840	TR	npn, MS	45	150	175	*45	—	40-90	1 max	15 max	—	—	—	
	TMT839	TR	npn, MS	45	150	175	*45	—	20-45	1 max	15 max	—	—	—	
	2N908	RA	npn, DB, si	45	—	—	45	25	75	.002	20	0.06	0.09	—	
	2N337A	GE	npn, GD, si	*50	500	3.33	*45	20	45	0.001	*2	0.015	0.004	—	
	2N644	RCA	pnp, DR, ge	*50	120	71	30	100	45	3	—	—	—	—	
	2N2349	GE	npn, GD, si	*50	150	200	*40	25	*250	1.0	*4	—	—	—	
	2N2677	GE	npn, GD, si	*50	250	—	*45	25	120	0.1	*3	0.06	0.09	0.8	
LL 34	ST3030	TR	npn, DJ, si	50	100	150	15	—	—	50	4	0.04	0.07	40	SPR TO-5 package TO-5 package TO-5 package
	TMT1131	TR	pnp, MS	50	150	200	*15-45	1 max	*15-45	1 max	45 max	—	—	0.05	
	TNT842	TR	npn, MESA, si	*50	100	175	45	50	*20	0.1	*6	0.04	0.01	0.05	
	TNT843	TR	npn, MESA, si	*50	100	175	45	50	*45	0.1	*6	0.04	0.01	0.05	
	2N865	PH	pnp, SP, si	52	150	140	*10	50	150	0.1	5	—	—	—	
	2N1254	HU	pnp, MS, si	55	250	160	30	—	25	0.2	8	—	—	0.015	
	2N1256	HU	pnp, MS, si	55	250	160	40	—	25	0.2	8	—	—	0.015	
	2N1258	HU	pnp, MS, si	55	250	160	30	—	25	0.2	8	—	—	0.015	
	2N1427	PH	pnp, MA, ge	60	25	85	*6	50	120	0.5	*3.5	—	—	0.1	
	2N1779	SY	npn, AJ, ge	60	100	100	25	100	25	10	10	—	—	—	
LL 35	2N2244	NA	npn, si	60	500	200	2.85	200	100	0.01	8	—	—	—	4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF
	2N2245	NA	npn, si	60	500	200	2.85	20	100	0.01	8	—	—	—	
	2N2246	NA	npn, si	60	500	200	2.85	20	100	0.01	8	—	—	—	
	2N2247	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	
	2N2248	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	
	2N2249	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	
	2N2250	NA	npn, si	60	500	200	2.85	20	100	0.01	8	—	—	—	
	2N2251	NA	npn, si	60	500	200	2.85	20	100	0.01	8	—	—	—	
	2N2252	NA	npn, si	60	500	200	2.85	20	100	0.01	8	—	—	—	
	2N2253	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	
LL 35	2N2254	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF 4db NF
	2N2255	NA	npn, si	60	500	200	2.85	45	100	0.01	8	—	—	—	
	2N2693	TI	npn, PE, si	*60	600	175	4.0	30	*60	.001	*3.4	0.7	0.6	0.1	
	2N2694	TI	npn, PE, si	*60	600	175	4.0	30	*30	.001	*3.4	0.7	0.6	0.1	
	TMT1132	TR	pnp, MS	60	150	200	—	—	*30-90	1 max	45 max	—	—	1.5 max	
	2N843	TR	npn, DJ, si	64	300	175	—	25	40	0.1	6	—	—	—	
	TMT843	TR	npn, DJ, si	64	300	175	—	25	40	0.1	6	—	—	—	
	TMT841	TR	npn, MS	65	150	175	—	—	80-330	1 max	15 max	—	—	2 max	
	2N560	WE	npn, DD, si	70	500	150	4.0	100	20	0.1	8	—	—	0.05	
	2N645	RCA	pnp, DR, ge	70	120	85	—	30	45	3	2	0.01	0.06	0.002	

HITACHI TRANSISTORS

SPECIFY "MESA" TYPE TRANSISTORS FOR HIGH FREQUENCY USE

2SA233, 2SA234, 2SA235

Hitachi PNP germanium diffused "Mesa" type transistors provide outstanding high frequency characteristics compared with conventional alloy junction or drift transistors.

Exclusive "Mesa" type transistors are indispensable for FM receivers used in tuner circuits and intermediate frequency amplifiers and also in TV receivers in intermediate

frequency amplifiers. They can be used effectively in short-wave converters, medium wave converters and all high frequency applications.

For superior performance, specify Hitachi "Mesa" type transistors . . . another engineering achievement from one of the world leaders in electronics.

Maximum Ratings ($T_a = 25^\circ\text{C}$)

Items	Symbol	Unit	2SA233	2SA234	2SA235
Collector Voltage	V_{CBO}	V	-20	-20	-20
Emitter Voltage	V_{EBO}	V	-0.5	-0.5	-0.5
Collector Current	I_C	mA	-10	-10	-10
Emitter Current	I_E	mA	10	10	10
Junction Temperature	T_j	$^\circ\text{C}$	85	85	85
Collector Dissipation	PC	mW	80	80	80
Ambient Temperature	T_A	$^\circ\text{C}$	60	60	60


Characteristics ($T_a = 25^\circ\text{C}$)

Items	Symbol	Conditions for measurement	Unit	2SA233	2SA234	2SA235
Max. Collector Cut-off Current	I_{CBO}	$V_C = -20\text{V}$ $I_E = 0$	μA	-30	-30	-30
Max. Emitter Cut-off Current	I_{EBO}	$V_E = -0.5\text{V}$ $I_C = 0$	μA	-50	-50	-50
Current Amplification Factor	h_{fe}	$V_C = -6\text{V}$ $I_E = 1\text{mA}$		50	60	80
Alpha Cut-off Frequency	$f_{\alpha b}$	$V_C = -6\text{V}$ $I_E = 1\text{mA}$	Mc	90	110	125

Typical Operation ($T_a = 25^\circ\text{C}$)

Items	Conditions for Measurement	Unit	2SA233	2SA234	2SA235
Power Gain at FM Radio Frequency	$V_C = -6\text{V}$ $I_E = 1\text{mA}$	db			
	$f_s = 100\text{Mc/s}$				12
	$R_g = 75\Omega$ $R_L = 2k\Omega$				
Mixer Gain at FM Radio Frequency	$V_C = -6\text{V}$ $I_E = 1\text{mA}$	db			
	$f_s = 100\text{Mc/s}$ $f_{osc} = 110.7\text{Mc}$				13
	$R_g = 3k\Omega$ $R_L = 15k\Omega$				

10.7 Mc Intermediate Frequency Amplifier Circuit

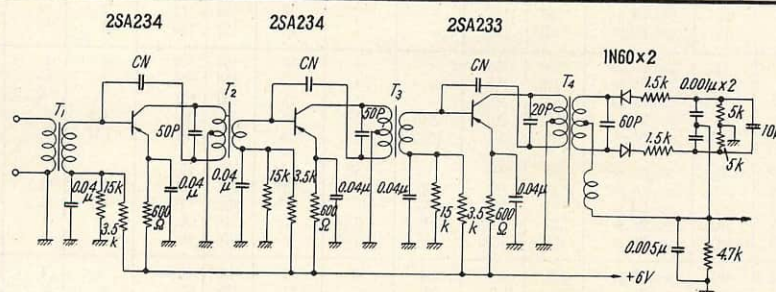

Hitachi New York, Ltd.

666, 5th Avenue, New York 19, N.Y., U.S.A.,

Sole Agent:

International Importer Inc.

2242 South Western Avenue, Chicago 8, Illinois, U.S.A.

Hitachi Ltd.
Tokyo Japan

LL continued

Cross Index Key	Type No.	Mfr.	Type	f_{ce} f_T f_{ab} (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
					P_c (mw)	T_i (°C)	$m_w/°C$	V_{CEO} V_{CBO} (v)	I_C (ma)	h_{fe} h_{FE}	I_{CO} (μa)	C_{oe} C_{ob} (pf)	t_r (μsec) t_{on} (nsec)	t_s (μsec) t_{off} (nsec)	$V_{ce(sat)}$ (v)	
LL 36	2N1411	PH	npn,MA,ge	*70	50	100	0.67	15	50	100	1.0	3.0	75	—	0.08	TO-5 Package
	2N2180	PH	npn,MA,ge	*70	50	100	0.67	15	50	100	1.0	3.0	75	—	0.08	
	2N1255	HU	npn,MS,si	75	250	160	1.8	15	—	30	0.2	8	—	—	—	TO-5 Package
	OC46	AMP	npn,PADT,ge	73	83	75	—	*20	125	80	3	—	—	—	—	
	2N1257	HU	npn,MS,si	75	250	160	1.8	30	—	40	0.2	8	—	—	—	TO-5 Package
	OC139	AMP	npn,PADT,ge	73.5	100	75	—	*20	250	45	0.8	—	—	—	—	
	OC140	AMP	npn,PADT,ge	74.5	100	75	—	*20	250	75	0.8	—	—	—	—	
	2N1259	HU	npn,MS,si	75	250	160	1.8	50	—	50	0.2	8	—	—	%	
	OC47	AMP	npn,PADT,ge	75.5	83	75	—	*20	125	<200	<3	—	—	—	—	
	2N706	FA	npn,DP,si	*80	1w	175	6.7	20	—	45	0.005	5	0.02	—	—	IND, TI, RCA, PH, CL, MO
LL 37	TMT696	TR	npn,MS	80	150	200	—	*60	—	*20-60	1max	35max	—	—	1.5max	FA, NA, GI
	2N702	TI	npn,DJ,si	100	150	175	.002	20	50	15-45	.5	—	—	—	.6	
	2N2800	MO	npn,PE,si	*100	800	200	4.57	*50	—	*30/90	0.01	*25	25	100	0.4	TI
	2N2801	MO	npn,PE,si	*100	800	200	4.57	*50	—	*75/225	0.1	*25	25	100	0.4	
	TMT697	TR	npn,MS	100	150	200	—	60	—	*40-120	1max	35max	—	—	1.5max	
	2N1507	RA	npn,DD,si	120	1w	175	13.2	60	500	200	.003	20	80	600	.07	
	2N2188	TI	npn,AD,ge	**125	125	—	—	40	30	90	3	—	—	—	—	
	2N2190	TI	npn,AD,ge	**125	125	—	—	60	30	90	3	—	—	—	—	
	2N703	TI	npn,MS,si	*150	600	—	—	25	50	*40-120	—	—	—	—	0.5	
	2N1139	TR	npn,GR,si	150	500	175	—	15	25	20	.25	8	12	10	0.7	
LL 38	2N2189	TI	npn,AD,ge	**150	125	—	—	40	30	135	3	—	—	—	—	SPR, GI
	2N2191	TI	npn,AD,ge	**150	125	—	—	60	30	135	3	—	—	—	—	
	2N2330	MO	npn,DD,si	150	800	175	5.33	*30	—	50	0.1	7	—	—	—	SPR, GI
	2N2331	MO	npn,DD,si	150	500	175	3.33	*30	—	50	0.1	7	—	—	—	
	2N501	PH	npn,MD,ge	175	60	100	0.8	*15	50	—	1.0	1.75	0.013	0.007	0.08	
	2N501A	PH	npn,MD,ge	175	175	60	0.8	*15	50	—	1.0	1.1	0.013	0.007	1.0	
	2N768	PH	npn,MD,ge	*175	35	100	0.46	12	100	40	1	1.6	—	—	0.09	
	2N2411	TI	npn,PE,si	200	1000	200	5.71	20	100	*20-60	.001	*4	.008	.050	0.1	
	2N2086	PH	npn,MS,si	*225	600	175	4.0	*120	500	*70	2.0	*7.4	0.06	0.085	0.43	
	2N2087	PH	npn,MS,si	*225	600	175	4.0	*120	500	*65	2.0	*7.4	0.055	0.065	0.39	
LL 39	2N240C	PH	npn,MD,ge	225*	150	100	2.0	*12	100	*60	3	*2.2	—	0.1	0.13	MO
	2N1495	PH	npn,MD,ge	*240	250	100	3.3	*40	500	*60	7	*4.0	0.03	—	0.18	
	2N1495	PH	npn,MD,ge	*240	250	100	3.3	*40	500	60	4	4.0	—	—	0.18	MO
	2N1496	PH	npn,MD,ge	*240	500	100	6.67	40	500	60	4	4.0	30	—	0.18	
	2N2048	PH	npn,MD,ge	250*	150	100	2.0	*20	100	125	1.0	*1.5	0.035	—	.19	
	2N2380	PH	npn,MS,si	*270	600	175	4.0	*80	500	70	4	*7.4	0.06	0.06	0.6	MO,SY,GE,RA,AMP
	2N2380A	PH	npn,MS,si	*270	600	175	4.0	*80	500	70	4	*7.4	0.06	0.06	0.4	
	2N2478	PH	npn,MS,si	*275	2000	175	4	*120	500	*70	2	*7.4	.055	.065	.45	
	2N559	WE	npn,DG,ge	300	150	100	4.0	*15	50	25	3	—	0.002	0.003	.3	
	2N705	TI	npn,AJ,ge	300	300	100	4	*15	50	6	.3	5	0.03	0.075	0.2	
LL 40	2N708	PH	npn,PL,si	*300	1200	200	2.1	*40	—	*120	.025	*6	—	.025	.4	SY,MO,RCA,GE,RA,AMP
	2N710	TI	npn,MS,ge	300	100	300	4	*15	50	6	.3	.06	.075	.80	80	
	2N711	TI	npn,MS,ge	300	300	100	—	*12	50	6	0.3	.07	0.1	.90	90	MO,SY,RCA,GE,RA,AMP
	2N711A	TI	npn,MS,ge	*300	150	—	—	7	100	*25-150	1.5	*6	—	—	0.5	
	2N711B	TI	npn,MS,ge	*300	150	—	—	7	100	*30-150	1.5	*6	—	—	0.45	MO
	2N784A	PH	npn,PL,si	*300	1000	175	6.85	*40	200	*150	.025	*3.5	—	.015	.19	
	2N960	TI	npn,EM,ge	*300	150	—	—	15	150	*20	3	*4	—	—	0.5	MO
	2N961	TI	npn,EM,ge	*300	150	—	—	12	150	*20	3	*4	—	—	0.5	
	2N962	TI	npn,EM,ge	*300	150	—	—	12	150	*20	3	*4	—	—	0.5	
	2N964	TI	npn,EM,ge	*300	150	—	—	15	150	*40	3	*4	—	—	0.5	
LL 41	2N965	TI	npn,EM,ge	*300	150	—	—	12	150	*40	3	4	—	—	0.5	MO,SY,GE,RA,AMP
	2N966	TI	npn,EM,ge	*300	150	—	—	12	150	*40	3	4	—	—	0.5	
	2N985	TI	npn,EM,ge	*300	150	—	—	15	200	*60	3	*6	—	—	0.6	MO,SY,GE,RA,AMP
	2N1992	WE	npn,D,si	300	350	200	2.0	15	50	30	0.5	5	—	20ns	0.25	
	2N2401	PH	npn,MD,ge	*300	150	100	2.0	*15	100	*90	1.5	*2.2	—	0.09	0.12	MO,SY,GE,RA,AMP
	2N2717	AMP	npn,AD,ge	300	275	75	0.50	*15	300	50	—	—	.020	.040	—	
	2N2381	MO	npn,EM,ge	*300	750	100	10	*30	500	*25	1	*3.5	8	20	0.25	
	2N2382	MO	npn,EM,ge	*300	750	100	10	*45	500	*25	1	*3.5	8	20	0.25	
	2N2256	MO	npn,ME,si	320	1000	175	6.67	*7	100	30	3	4	3	4	—	
	2N2257	MO	npn,ME,si	320	1000	175	6.67	*7	100	50	3	4	3	4	—	
LL 42	2N2258	MO	npn,ME,ge	320	300	100	4	*7	100	30	3	4	4	3	—	Epitaxial
	2N2259	MO	npn,ME,ge	320	300	100	4	*7	100	50	3	4	4	3	—	
	2N2402	PH	npn,MD,ge	*325	150	100	2.0	*18	100	170	1.5	*2.2	—	0.075	0.11	Epitaxial, GI
	2N707A	MO	npn,DM,si	350	1w	175	6.7	*70	—	30	.01	4	—	—	—	
	2N537	WE	npn,D,ge	400	250	100	3.3	*30	100	9	0.1	—	—	—	—	MO,SY,TI,NA,HU,GI,TI,PH,CL,DP
	2N706A	MO	npn,DM,si	400	1w	175	6.7	*25	—	4	.005	4.5	.018	.016	—	
	2N706B	MO	npn,DM,si	400	1w	175	6.7	*25	—	4	.005	4.5	.018	.016	—	
	2N828	MO	npn,DM,si	400	500	175	4	*15	200	4	.4	3.5	—	—	—	
	2N828A	MO	npn,DJEM,ge	*400	300	100	4	*15	200	*40	3	*2.2	—	30	0.11	
	2N829	MO	npn,DJEM,ge	*400	300	100	4	*15	200	*80	3	*2.2	—	30	0.11	

LL continued

Cross Index Key	Type No.	Mfr.	Type	f _{ce} *f _T *f _{cb} (mc)	MAX. RATINGS			CHARACTERISTICS				SWITCHING			Remarks	
					P _c (mw)	T _i (°C)	m _w /°C	V _{CEO} *V _{CBO} (v)	I _C (ma)	h _{FE} *h _{FE}	I _{CO} (μa)	C _{oe} *C _{ob} (pf)	t _r (μsec) *t _{on} (nsec)	t _s (μsec) *t _{off} (nsec)		V _{ce(sat)} (v)
LL 43	2N1195	WE	pn-p, D, ge	400	300	100	4.0	*30	50	25	5	2.5	—	—	—	—
	2N1204	PH	pn-p, MD, ge	*400	200	100	2.67	*20	500	30	4	*5.0	0.015	—	0.3	—
	2N1204A	PH	pn-p, MD, ge	*400	200	100	2.67	*20	500	45	4	*5.0	0.015	—	0.3	—
	2N1494A	PH	pn-p, MD, ge	*400	400	100	5.3	*20	500	*45	4	*5.0	0.015	—	0.3	—
	2N2096	SPR	pn-p, ED, ge	*400	750	100	—	25	500	*40	12	*20	35	70	0.6	—
	2N2097	SPR	pn-p, ED, ge	*400	750	100	—	40	500	*50	12	*20	20	50	0.5	—
	2N2099	SPR	pn-p, ED, ge	*400	750	100	—	25	500	*40	12	*20	35	70	0.6	—
	2N2100	SPR	pn-p, ED, ge	*400	750	100	—	40	500	*50	12	*20	20	50	0.5	—
	2N2637	MO	npn, PE, si	*400	800	200	4.57	*60	—	*50/150	0.25	*8	*40	*40	0.25	—
	2N2538	MO	npn, PE, si	*400	800	200	4.57	*60	—	*100/300	0.25	*8	*40	*40	0.45	—
LL 44	2N2539	MO	npn, PE, si	*400	500	200	2.86	*60	—	*50/150	0.25	*8	*40	*40	0.45	—
	2N2540	MO	npn, PE, si	*400	500	200	2.86	*60	—	*100/300	0.25	*8	*40	*40	0.45	—
	NS345	NA	npn, DM, si	400	500	175	2.8	30	80-200	—	—	5	—	—	—	—
	2N774A	TI	npn, PE, si	450	1000	175	6.67	*15	200	*40-120	0.002	*3.5	.003	.009	0.2	SPR
	2N779A	PH	pn-p, MD, ge	450	60	100	.8	*15	50	—	1	1.9	—	—	—	—
	2N779B	PH	pn-p, MD, ge	*450	150	100	2.0	15	100	125	0.5	1.4	13	—	0.09	Epitaxial
	2N835	MO	npn, DM, si	450	300	175	2	*25	200	40	0.5	—	—	—	0.3	SPR
	2N846A	PH	pn-p, MD, ge	450	60	100	.8	*15	50	—	1	1.9	—	—	—	—
	2N834	MO	npn, DM, si	500	1w	175	6.7	*40	200	5	.01	2.8	.015	.016	—	SY, PH, CL, DP, GI
	2N2501	MO	pn-p, PE, si	*500	360	200	2.06	*40	—	*50/150	—	*4	—	—	0.2	—
LL 45	2N2651	PH	npn, PL, si	*600	1200	200	2.1	*40	500	*50	.012	*2.85	—	.007	.2	US, MIL only
	2N1094	WE	pn-p, D, ge	600	150	100	2.0	30	40	25	5.0	2.5	—	0.003	—	TO-5, non saturated
	2N1559	WE	pn-p, D, ge	750	150	100	0.5	15	50	25	5	—	—	—	—	—
	2N2710	PH	npn, PL, si	*650	1200	200	2.1	*40	500	*65	.012	*2.85	—	.015	.2	—
	2N1385	TI	pn-p, MS, ge	750	750	100	8	25	100	30	5	1.3	.001	.002	.4	—
	2N768	PH	pn-p, MD, ge	*900	35	100	0.46	*12	100	*40	1	*1.6	—	—	0.09	SPR
	2N769	PH	pn-p, MD, ge	900	35	100	0.46	*12	100	55	0.3	1.5	—	—	0.13	MO
	2N918	FA	npn, DP, si	*900	300	200	1.71	15	100	*50	0.0003	*1.0	—	—	0.3	—
	2N976	PH	pn-p, MD, ge	*900	100	100	1.33	*15	100	*80	3	*1.5	0.007	—	0.12	—
	2N797	TI	npn, MS, ge	*1000	150	—	—	7	150	*40	1.0	*4	—	—	0.44	—
LL 46	2N2205	RCA	—	1000	—	—	25	200	*20	—	—	—	—	0.025	—	TO-18
	2N2206	RCA	—	1000	—	—	25	—	*40	—	—	—	0.035	—	—	—
	2N167A	GE	npn, AJ, ge	—	65	85	—	30	75	30	0.6	—	—	—	—	—
	2N240	PH	pn-p, SBT, ge	—	25	85	0.82	*6	15	30	0.5	*4	—	—	—	SPR-MIL
	2N269	RCA	pn-p, AJ, ge	—	120	85	—	*25	100	*50	5	—	—	—	0.15	—
	2N335B	GE	npn, GJ, si	—	500	175	—	60	25	52	1	—	—	—	—	—
	2N336A	GE	npn, GJ, si	—	500	175	—	45	25	75	1	11	—	—	—	—
	2N377A	SY	npn, AJ, ge	—	150	100	2	*40	200	20-60	40	—	—	—	—	GI, TI
	2N388A	SY	npn, AJ, ge	—	150	100	2	25	200	60-180	40	—	—	—	—	GI
	2N398	RCA	pn-p, AJ, ge	—	50	55	—	*105	100	60	6	—	—	—	0.3	GI, KF, MO, TI
LL 47	2N399A	GE	pn-p, AJ, ge	—	150	100	—	15	200	70	2	—	—	—	—	—
	2N438A	SY	npn, AJ, ge	—	150	85	2.5	*25	200	15(min)	10	—	0.7	—	—	GI, TI
	2N439A	SY	npn, AJ, ge	—	150	85	2.5	*25	200	300(min)	10	—	0.5	—	—	GI, TI
	2N440A	PH	pn-p, AJ, ge	—	200	85	3.3	*25	200	40	10	—	0.3	—	—	GI, TI
	2N496	PH	pn-p, SB, si	*150	150	140	1.3	10	50	5.0	1	6	—	—	0.08	—
	2N556	SY	npn, AJ, ge	—	100	85	1.66	20	200	—	25	—	3.5	2	0.5	h _{FE} =3.5 ns max
	2N557	SY	npn, AJ, ge	—	100	85	1.66	15	200	—	25	—	6.5	2.5	0.5	—
	2N558	SY	npn, AJ, ge	—	100	85	1.66	15	200	—	15	—	3.5	2	0.75	—
	2N586	RCA	pn-p, AJ, ge	—	250	85	—	45	250	55	8	—	—	—	0.25	—
	2N587	SY	npn, AJ, ge	—	150	85	2.5	*40	200	20	10	30	—	—	—	TI
LL 48	2N597	PH	pn-p, AJ, ge	—	250	100	3.3	45	400	—	5	15	—	—	0.085	—
	2N634A	GE	npn, AJ, ge	—	150	85	—	20	300	55	6	—	—	—	—	—
	2N635A	GE	npn, AJ, ge	—	150	85	85	20	300	100	6	—	—	—	—	—
	2N636A	GE	npn, AJ, ge	—	150	85	—	15	300	190	6	—	—	—	—	—
	2N705A	RA	pn-p, EM, ge	—	—	100	—	15	100	*40	3.0	8.0	—	50	0.20	—
	2N706	FA	npn, PL, si	—	1200	175	6.7	*25	50	20	—	*5	.02	—	0.6	GI, TR, SY, NA, ND, TI, RCA, CL, PH (Epitaxial, MO), GI, CL
	2N707	FA	npn, DP, si	—	1w	175	2.0	28	—	12	.005	5	.02	—	—	—
	2N708	AL	npn, DP, si	—	360	200	2.0	*40	—	15	0.025	6	—	25	0.40	—
	2N709	SY	npn, P, si	—	—	—	—	*15	50	*34	3.0	*3.0	—	—	0.50	—
	2N710A	RA	pn-p, EM, ge	—	150	100	—	15	50	—	—	8.0	—	50	—	—
LL 49	2N711A	RA	pn-p, EM, ge	—	—	100	—	15	100	*25*150	1.5	6.0	—	120	0.55	—
	2N725	SY	pn-p, DM, ge	—	150	100	2	15	50	20	3	—	0.1	—	—	GE
	2N781	RA	pn-p, EM, ge	—	—	100	—	15	200	*25	3.0	—	—	20	0.16	—
	2N782	RA	pn-p, EM, ge	—	—	100	—	12	200	*20	30	—	—	35	0.20	—
	2N784A	SY	npn, DP, si	—	360	200	2.0	40	200	25	0.025	3.5	20	15	0.19	Epitaxial
	2N794	RCA	pn-p, DM, ge	—	150	85	2.5	13	100	50	1	8	—	—	—	—
	2N795	RCA	pn-p, DM, ge	—	150	85	2.5	13	100	50	1	8	—	—	—	—
	2N835	CL	npn, DP, si	—	150	175	6.7	25	200	20	0.5	4	0.02	0.035	—	—
	2N849/	TI	npn, EP, si	—	1000	—	—	15	30	*20*60	—	—	—	—	0.6	—
	2N850/	TI	npn, EP, si	—	1000	—	—	15	30	*40*120	—	—	—	—	0.6	—

LL continued

Cross Index Key	Type No.	Mfr.	Type	f_{ae} $^{*}f_{ab}$ $^{**}T$ (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING			Remarks
					P_c (mw)	T_i (°C)	$m_w/°C$	V_{CEO} $^{*}V_{CBO}$ (v)	I_C (ma)	h_{fe} $^{*}h_{FE}$	I_{CO} (μ a)	C_{oe} $^{*}C_{ob}$ (pf)	t_r (μ sec) $^{*}t_{on}$ (nsec)	t_s (μ sec) $^{*}t_{off}$ (nsec)	$V_{ce(sat)}$ (v)	
LL 50	2N914	SY	npn,DP,si	—	360	200	2.0	*40	—	30	0.025	6	40	20	0.7	Epitaxial, CL
	2N917	AI	npn,P,si	—	0.3w	—	—	*30	—	*35	.0001	*1.7	—	—	—	—
	2N1119	PH	npn,SAT,si	—	150	140	1.3	10	50	5.0	.001	6.0	—	—	—	SPR
	2N1122	PH	npn,MA,ge	—	25	85	0.63	12	50	8	5.0	6.0	—	—	0.1	SPR, GI
	2N1122A	PH	npn,MA,ge	—	25	85	0.63	15	50	8	5.0	6.0	—	—	0.1	SPR, GI
	2N1175	GE	npn,AJ,ge	—	200	85	—	25	200	80	6	—	—	—	—	MO, TI
	2N1175A	GE	npn,AJ,ge	—	200	85	—	25	200	80	6	—	—	—	—	TI
	2N1213	RCA	npn,MESA,ge	—	75	85	—	25	100	—	3	—	.015	.05	—	—
	2N1214	RCA	npn,MESA,ge	—	75	85	—	25	100	—	3	—	.015	.05	—	—
	2N1215	RCA	npn,MESA,ge	—	75	85	—	25	100	—	3	—	.015	.05	—	—
LL 51	2N1216	RCA	npn,MESA,ge	—	75	85	—	25	100	—	3	—	.015	.05	—	—
	2N1217	GE	npn,AJ,ge	—	75	85	—	20	25	40	.6	—	—	—	—	—
	2N1252	AI	npn,P,si	—	2w	—	—	*30	—	*35	.10	*20	—	—	—	TI
	2N1253	AI	npn,P,si	—	2w	—	—	*30	—	*45	.10	*20	—	—	—	—
	2N1277	GE	npn,GJ,si	—	150	150	—	*30	25	20	.001	—	—	—	—	TI
	2N1278	GE	npn,GJ,si	—	150	150	—	*30	25	33	.001	—	—	—	—	TI
	2N1279	GE	npn,GJ,si	—	150	150	—	*30	25	80	.001	—	—	—	—	—
	2N1288	GE	npn,BG,ge	—	75	85	—	10	50	50	2	—	—	—	—	—
	2N1289	GE	npn,MB,ge	—	75	85	—	15	100	50	2	—	—	—	—	—
	2N1299	SY	npn,AJ,ge	—	150	100	2	40	200	35-110	0.1	—	Rise + Fall time = 1.5 usGC			—
LL 52	2N1300	RCA	npn,DM,ge	—	150	85	2.5	13	100	50	1	8	—	—	—	TI
	2N1301	RCA	npn,DM,ge	—	150	85	2.5	13	100	50	1	8	—	—	—	TI
	2N1384	RCA	npn,DR,ge	—	240	85	4	30	500	50	4	—	—	—	—	—
	2N1404	TI	npn,AJ,ge	—	150	85	2.5	25	300	—	3	16	—	—	—	MIL
	2N1411	PH	npn,MA,ge	—	25	85	—	*5	50	*75	0.3	*3.0	—	—	—	—
	2N1413	GE	npn,AJ,ge	—	200	85	—	25	200	36	8	—	—	—	—	TI
	2N1414	GE	npn,AJ,ge	—	200	85	—	25	200	52	8	—	—	—	—	MO, TI
	2N1450	RCA	npn,DR,ge	—	120	85	—	30	100	20	10	—	—	—	—	GI
	2N1473	SY	npn,AJ,ge	—	200	75	4	40	400	25-80	100	—	—	—	—	—
	2N1499	PH	npn,MD,ge	—	30	85	.75	*30	50	8.5	1	*1.3	—	—	—	MIL
LL 53	2N1614	GE	npn,AJ,ge	—	240	85	—	40	300	32	25	—	—	—	—	TI
	2N1683	RCA	npn,DM,ge	—	150	85	2.5	13	100	75	1	8	—	—	—	—
	2N1694	GE	npn,AJ,ge	—	75	85	—	20	25	30	0.6	—	—	—	—	—
	2N1708	RCA	—	—	1000	—	—	25	200	*20	—	—	—	0.025	—	GI, SPR
	2N1754	PH	npn,MD,ge	—	50	85	.83	*13	100	—	1	1.5	—	—	—	—
	2N1808	TI	npn,AJ,ge	—	150	85	2.5	25	300	—	5	11	—	—	—	—
	2N1954	RA	npn,AJ,ge	—	375	100	0.2	60	1a	90	10	—	—	—	—	—
	2N1955	RA	npn,AJ,ge	—	375	100	0.2	60	1a	100	10	—	—	—	—	—
	2N1956	RA	npn,AJ,ge	—	375	100	0.2	60	1a	90	—	—	—	—	—	—
	2N1957	RA	npn,AJ,ge	—	375	100	0.2	60	1a	90	10	—	—	—	—	—
LL 54	2N2002	NA	npn,AJ,si	—	250	175	1.67	30	100	—	.001	8	—	—	—	—
	2N2003	NA	npn,AJ,si	—	250	175	1.67	30	100	—	.001	8	—	—	—	—
	2N2004	NA	npn,AJ,si	—	250	175	1.67	50	100	—	.003	8	—	—	—	—
	2N2005	NA	npn,AJ,si	—	250	175	1.67	50	100	—	.0015	8	—	—	—	—
	2N2006	NA	npn,AJ,si	—	250	175	1.67	60	100	—	.002	8	—	—	—	—
	2N2007	NA	npn,AJ,si	—	250	175	1.67	60	100	—	.005	8	—	—	—	—
	2N2175	SSD	npn,AJ,si	—	100	175	0.7	6	50	*80	*0.2	10	—	—	—	—
	2N2176	SSD	npn,AJ,si	—	100	175	0.7	6	50	*80	*0.2	10	—	—	—	—
	2N2282	BE	npn,DAP,ge	—	5	110	67	60	3a	60	50	75pf	2.5	1.5	0.2	—
	2N2283	BE	npn,DAP,ge	—	5	110	67	100	3a	60	50	75pf	2.5	1.5	0.2	—
LL 55	2N2284	BE	npn,DAP,ge	—	5	110	67	200	3a	60	50	75pf	2.5	1.5	0.2	—
	2N2368	AI	npn,P,si	—	1.2w	—	—	*40	—	*40	.01	*2.5	—	—	—	—
	2N2369	AI	npn,P,si	—	1.2w	—	—	*40	—	*75	.01	*2.5	—	—	—	—
	2N2378	SPR	npn,SP,si	—	150	140	1.3	*10	50	5.0	0.001	6.0	—	—	—	—
	2N2713	GE	npn,PE,si	—	200	100	2.67	*18	200	*30-90	0.5	—	85	85	0.30	—
	2N2714	GE	npn,PE,si	—	200	100	2.67	*18	200	75-225	0.5	—	85	85	0.30	—
	4D20	GE	npn,GD,si	—	—	150	1.5	*40	25	*15-50	1	*4	0.1	0.1	1.5	—
	4D21	GE	npn,GD,si	—	—	150	1.5	*40	25	*40-135	1	*4	0.1	0.1	1.5	—
	4D22	GE	npn,GD,si	—	—	150	1.5	*40	25	*120-250	1	*4	0.1	0.1	1.5	—
	4D24	GE	npn,GD,si	—	—	125	1.25	*40	25	*15-50	1	*4	—	—	—	—
LL 56	4D25	GE	npn,GD,si	—	—	125	1.25	*40	25	*40-135	1	*4	—	—	—	—
	4D26	GE	npn,GD,si	—	—	125	1.25	*40	25	*120-250	1	*4	—	—	—	—
	10B551	GE	npn,PE,si	—	100	125	1.0	*40	—	*30-120	50	*6	45	25	0.25	—
	10B553	GE	npn,PE,si	—	100	125	1.0	*40	—	*30-120	0.5	*6	—	60	0.4	—
	10B555	GE	npn,PE,si	—	100	125	1.0	*25	—	*20	0.5	*6	—	25	0.6	—
	10B556	GE	npn,PE,si	—	100	125	1.0	*25	—	*20-60	0.5	*6	—	25	0.6	—
	SST610	SSE	npn	—	500	—	0.25	14v	500	10,000	—	35pf	—	—	1.5v	T05 Package

SILICON FIELD EFFECT TRANSISTORS



2N2386



2N2794

These P-channel diffused silicon transistors embody all the desirable characteristics inherent in the field effect design—low input capacitance and high impedance. Use of an S-shaped gate configuration contributes to the exceptionally low capacitance ■ Tung-Sol's wide application experience with injection transistors and vacuum tubes—features of which are combined in the field effect transistor—is an important consideration for anyone seeking a competent source of this advanced semiconductor device ■ Write for complete technical information. Tung-Sol Electric Inc., Newark 4, N. J. TWX: 201-621-7977

TYPICAL ELECTRICAL CHARACTERISTICS (25°C)

	TEST	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
2N2386	Drain Current	I_{DSS}	$V_{DS} = -10V, V_{GS} = 0$		3.0		mA
	Forward Transadmittance	Y_{FS}	$V_{DS} = -10V, V_{GS} = 0$ $f = 1Kc$	1000		3000	μmho
2N2794	Drain Current	I_{DSS}	$V_{DS} = -10V, V_{GS} = 0$	1.5		5	mA
	Forward Transadmittance	Y_{FS}	$V_{DS} = -10V, V_{GS} = 0$ $f = 1Kc$	1000		3000	μmho



TUNG-SOL

0.5 AMP INTERDIGITATED PASSIVATED SILICON PLANAR EPITAXIAL TRANSISTORS

2N2217

2N2218

2N2219

(TO-5)


2N2220

2N2221


2N2222

(TO-18)

**CONTOURS OF CONSTANT
BANDWIDTH PRODUCT (f_T)**

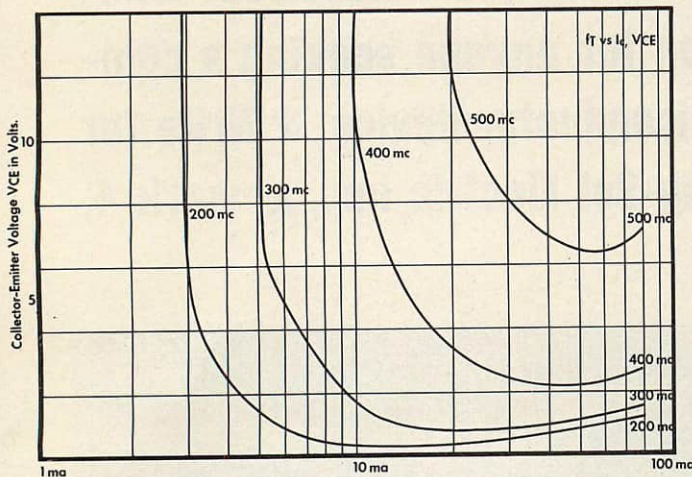

**PULSED DC CURRENT GAIN
vs COLLECTOR CURRENT**

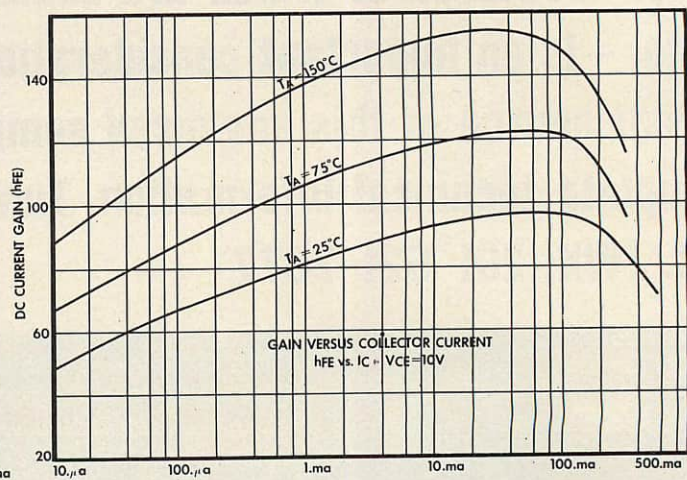

In production quantities, General Instrument's new Interdigitated Silicon Passivated Planar Epitaxial Transistors feature high speed, high gain and excellent gain retention. For further details, call your nearest sales office, authorized distributor, or write to Applications Engineering, General Instrument, 600 West John Street, Hicksville, N.Y.

GENERAL INSTRUMENT SEMICONDUCTOR DIVISION

General Instrument Corporation, 65 Gouverneur Street, Newark 4, New Jersey

HIGH LEVEL SWITCHING

Generally types rated at one watt and above. In order of f_{ae} (f_{ab} or f_T where noted).

Cross Index Key	Type No.	Mfr.	Type	f_{ae} * f_T ** f_{ab} (kc)	MAX. RATINGS				CHARACTERISTICS					SWITCHING			Remarks
					P_c (w)	T_j (°C)	$w/°C$	V_{CEO} * V_{CBO} (v)	I_C (a)	h_{fe} * h_{FE}	I_{CO} (ma) (* μa)	Powr. Gain (db)	Powr. Out (w)	t_r (μsec)	t_s (μsec)	$V_{ce(sat)}$ (μa)	
HL 1	2N1830	WH	npn,AJ,si	0.014	250	175	2.22	*50	30	*10	5	—	8	3.0	0.87		
	2N1831	WH	npn,AJ,si	0.014	250	175	2.22	*100	30	*10	5	—	8	3.0	0.87		
	2N1832	WH	npn,AJ,si	0.014	250	175	2.22	*150	30	*10	5	—	8	3.0	0.87		
	2N1833	WH	npn,AJ,si	0.014	250	175	2.22	*200	30	*10	5	—	8	3.0	0.87		
	2N2109	WH	npn,AJ,si	0.014	250	175	2.22	*50	30	*10	5	—	4	1.3	0.4	0.4	
HL 2	2N2110	WH	npn,AJ,si	0.014	250	175	2.22	*100	30	*10	5	—	4	1.3	0.4	0.4	
	2N2111	WH	npn,AJ,si	0.014	250	175	2.22	*150	30	*10	5	—	4	1.3	0.4	0.4	
	2N2112	WH	npn,AJ,si	0.014	250	175	2.22	*200	30	*10	5	—	4	1.3	0.4	0.4	
	2N2113	WH	npn,AJ,si	0.014	250	175	2.22	*250	30	*10	5	—	4	1.3	0.4	0.4	
	2N2114	WH	npn,AJ,si	0.014	250	175	2.22	*300	30	*10	5	—	4	1.3	0.4	0.4	
	2N2130	WH	npn,AJ,si	0.014	250	175	2.22	*50	30	*10	5	—	8	3.0	0.87		
	2N2131	WH	npn,AJ,si	0.014	250	175	2.22	*100	30	*10	5	—	8	3.0	0.87		
	2N2132	WH	npn,AJ,si	0.014	250	175	2.22	*150	30	*10	5	—	8	3.0	0.87		
	2N2133	WH	npn,AJ,si	0.014	250	175	2.22	*200	30	*10	5	—	8	3.0	0.87		
	2N2116	WH	npn,AJ,si	0.0145	250	175	2.22	*50	30	*10	5	—	5.6	1.4	0.63	1.4	
HL 3	2N2117	WH	npn,AJ,si	0.0145	250	175	2.22	*100	30	*10	5	—	5.6	1.4	0.63	0.63	
	2N2118	WH	npn,AJ,si	0.0145	250	175	2.22	*150	30	*10	5	—	5.6	1.4	0.63	0.63	
	2N2119	WH	npn,AJ,si	0.0145	250	175	2.22	*200	30	*10	5	—	5.6	1.4	0.63	0.63	
	2N2123	WH	npn,AJ,si	0.016	250	175	2.22	*50	30	*10	5	—	6.4	1.5	0.74	0.74	
	2N2124	WH	npn,AJ,si	0.016	250	175	2.22	*100	30	*10	5	—	6.4	1.5	0.74	0.74	
	2N2125	WH	npn,AJ,si	0.016	250	175	2.22	*150	30	*10	5	—	6.4	1.5	0.74	0.74	
	2N2126	WH	npn,AJ,si	0.016	250	175	2.22	*200	30	*10	5	—	6.4	1.5	0.74	0.74	
	2N1238	HU	pnnp,FJ,si	0.8	1.0	200	—	15	0.5	14	0.1	—	—	—	—	—	
	2N1239	HU	pnnp,FJ,si	0.8	1.0	200	—	15	0.5	32	0.1	—	—	—	—	—	
	2N1240	HU	pnnp,FJ,si	1.0	1.0	200	—	35	0.5	14	0.1	—	—	—	—	—	
HL 4	2N1241	HU	pnnp,FJ,si	1.0	1.0	200	—	35	0.5	24	0.1	—	—	—	—	—	
	2N1242	HU	pnnp,FJ,si	1.0	1.0	200	—	65	0.5	14	0.1	—	—	—	—	—	
	2N1243	HU	pnnp,FJ,si	1.0	1.0	200	—	65	0.5	24	0.1	—	—	—	—	—	
	2N1244	HU	pnnp,FJ,si	1.2	1.0	200	—	110	0.5	14	0.1	—	—	—	—	—	
	2N1073	BE	pnnp,DJ,ge	1.5	35	100	1.5	*40	10	*20-6	2.0	—	—	—	—	1.0	DE
	2N1073A	BE	pnnp,DJ,ge	1.5	35	100	1.5	*80	10	*20-6	2.0	—	—	—	—	1.0	DE
	2N1073B	BE	pnnp,DJ,ge	1.5	35	100	1.5	*120	10	*20-6	2.0	—	—	—	—	1.0	DE
	B-1085	BE	pnnp,DJ,ge	1.5	60	100	1.0	120	10	5a	2.0	—	—	—	—	0.75	
	OC22	AMP	pnnp,PADT,ge	2.5	10	75	—	*32	1	150	30	—	—	—	—	—	
	OC23	AMP	pnnp,PADT,ge	2.5	10	75	—	*40	1	150	30	—	—	—	—	—	
HL 5	OC24	AMP	pnnp,PADT,ge	2.5	10	75	—	*32	1	150	30	—	—	—	—	—	
	2N1518	DE	pnnp,AJ,ge	4	70	100	1.2	*50	25	15-60	100	—	40	20	7	0.3	SO
	2N1519	DE	pnnp,AJ,ge	4	70	100	1.2	*80	25	15-60	100	—	40	20	7	0.3	SO
	2N1520	DE	pnnp,AJ,ge	4	70	100	1.2	*50	35	17-18	100	—	40	20	7	0.3	
	2N1521	DE	pnnp,AJ,ge	4	70	100	1.2	*80	35	25-100	100	—	40	20	7	0.3	SO
	2N1522	DE	pnnp,AJ,ge	4	70	100	1.2	*50	50	25-100	100	—	40	20	7	0.3	SO
	2N1523	DE	pnnp,AJ,ge	4	70	100	1.2	*80	50	25-100	100	—	40	20	7	0.3	SO
	2N297	BE	pnnp,AJ,ge	5	35	90	1.5	50	5	—	3	—	—	—	—	1.02	
	2N297A	CL	pnnp,AJ,ge	5	12	95	2.0	*60	5	—	3	—	—	—	—	1.0	BE, DE, MO, SO
	2N618	CL	pnnp,AJ,ge	5	14	90	1.5	*80	3	—	3	—	—	—	—	0.8	MO, BE
HL 6	2N375	CL	pnnp,AJ,ge	7	—	95	—	*80	3	—	3	—	—	—	—	1.0	MO, BE
	2N378	TS	pnnp,AJ,ge	7	50	100	1.2	20	5	30	0.5	—	—	—	—	—	BE
	2N379	CL	pnnp,AJ,ge	7	5	85	0.3	80	3	—	5	—	—	—	—	1	TS, BE
	2N380	TS	pnnp,AJ,ge	7	50	100	0.8	30	5	—	0.5	—	—	—	—	—	BE, CL
	2N458	TI	pnnp,AJ,ge	7	50	95	0.72	80	5	—	1	—	—	12	12.5	0.24	CL, BE
	2N459	TS	pnnp,AJ,ge	7	50	100	0.8	60	5	—	0.5	—	—	—	—	—	BE, CL
	2N1011	DE	pnnp,AJ,ge	7	70	100	0.1	*80	5	—	100	—	—	5	2	0.3	2N1011 Sig. C., MO, BE, CL
	2N2230	WH	npn,AJ,si	7	150	2.0	*50	10	*400	10	—	—	12	3.5	2.2	—	
	2N2231	WH	npn,AJ,si	7	150	150	2.0	*100	10	*400	10	—	—	12	3.5	2.2	
	2N2232	WH	npn,AJ,si	7	150	150	2.0	*150	10	*400	10	—	—	12	3.5	2.2	
HL 7	2N2233	WH	npn,AJ,si	7	150	150	2.0	*200	10	*400	1.0	—	—	12	3.5	2.2	
	2N456A	DE	pnnp,AJ,ge	10	94	100	1.2	*40	7	—	0.065	—	—	10	5	—	TI, BE, CL
	2N457A	DE	pnnp,AJ,ge	10	94	100	1.2	*60	0.065	—	0.065	—	—	10	5	—	TI, BE, CL
	2N458A	DE	pnnp,AJ,ge	10	94	100	1.2	*80	7	—	0.065	—	—	10	5	—	TI, BE, CL
	2N1038	TI	pnnp,AJ,ge	10	20	100	0.27	40	3	33	50	—	—	—	—	—	BE, KF
	2N1039	TI	pnnp,AJ,ge	10	20	100	0.27	60	3	33	50	—	—	—	—	—	BE, KF
	2N1040	TI	pnnp,AJ,ge	10	20	100	0.27	80	3	33	50	—	—	—	—	—	BE, KF
	2N1358	DE	pnnp,AJ,ge	10	150	100	2	*80	15	—	0.1	—	40	15	5	0.3	TS, TI, RCA, MO, SO, BE
	2N1412	DE	pnnp,AJ,ge	10	150	100	2	*100	15	—	100	—	40	15	5	0.3	TS, RCA, MO, SO, BE
	2N1970	DE	pnnp,AJ,ge	10	150	100	2	*100	15	—	0.1	—	—	10	5	—	SO, MO

HL *continued*

Cross Index Key	Type No.	Mfr.	Type	f _{ce} *f _T **f _{cb} (kc)	MAX. RATINGS			CHARACTERISTICS					SWITCHING			Remarks	
					P _c (w)	T _i (°C)	W _a °C	V _{CEO} V _{CBO} (v)	I _C (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*µa)	Powr. Gain (db)	Powr. Out (w)	t _r (µsec)	t _s (µsec)		V _{ce(sat)} (µa)
HL 8	2N2226	WH	npn, AJ, si	10	150	150	2.0	*50	10	*100	10	—	—	8	3	2.2	
	2N2227	WH	npn, AJ, si	10	150	150	2.0	*100	10	*100	10	—	—	8	3	2.2	
	2N2228	WH	npn, AJ, si	10	150	150	2.0	*150	10	*100	10	—	—	8	3	2.2	
	2N2564	KF	ppn, AJ, ge	10	20	100	.27	*40	3	*25	*40	—	—	—	—	.5	
	2N2565	KF	ppn, AJ, ge	10	20	100	.27	*60	3	*25	*40	—	—	—	—	.5	
	2N2566	KF	ppn, AJ, ge	10	20	100	.27	*80	3	*25	*40	—	—	—	—	.5	
HL 9	2N2567	KF	ppn, AJ, ge	10	20	100	.27	*100	3	*25	*40	—	—	—	—	.5	
	2N1809	WH	npn, AJ, si	14	250	175	2.22	*50	30	*10	5	—	—	4	1.3	0.4	
	2N1810	WH	npn, AJ, si	14	250	175	2.22	*100	30	*10	5	—	—	4	1.3	0.4	
	2N1811	WH	npn, AJ, si	14	250	175	2.22	*150	30	*10	5	—	—	4	1.3	0.4	
	2N1812	WH	npn, AJ, si	14	250	175	2.22	*200	30	*10	5	—	—	4	1.3	0.4	
	2N1813	WH	npn, AJ, si	14	250	175	2.22	*250	30	*10	5	—	—	4	1.3	0.4	
HL 10	2N1814	WH	npn, AJ, si	14	250	175	2.22	*300	30	*10	5	—	—	4	1.3	0.4	
	2N2739	WH	npn, AJ, si	14	200	175	2.0	*50	20	*10	15	—	—	9	2	0.4	
	2N2740	WH	npn, AJ, si	14	200	175	2.0	*100	20	*10	15	—	—	9	2	0.4	
	2N2741	WH	npn, AJ, si	14	200	175	2.0	*150	20	*10	15	—	—	9	2	0.4	
	2N2742	WH	npn, AJ, si	14	200	175	2.0	*200	20	*10	15	—	—	9	2	0.4	
	2N2757	WH	npn, AJ, si	14	200	175	2.0	*50	30	*10	15	—	—	9	2	0.4	
HL 11	2N2758	WH	npn, AJ, si	14	200	175	2.0	*100	30	*10	15	—	—	9	2	0.4	
	2N2759	WH	npn, AJ, si	14	200	175	2.0	*150	30	*10	15	—	—	9	2	0.4	
	2N2760	WH	npn, AJ, si	14	200	175	2.0	*200	30	*10	15	—	—	9	2	0.4	
	2N2761	WH	npn, AJ, si	14	200	175	2.0	*250	30	*10	15	—	—	9	2	0.4	
	2N1817	WH	npn, AJ, si	14.5	250	175	2.22	*50	30	*10	5	—	—	5.5	1.4	0.63	
	2N1818	WH	npn, AJ, si	14.5	250	175	2.22	*100	30	*10	5	—	—	5.5	1.4	0.63	
HL 12	2N1819	WH	npn, AJ, si	14.5	250	175	2.22	*150	30	*10	5	—	—	5.5	1.4	0.63	
	2N2745	WH	npn, AJ, si	14.5	200	175	2.0	*50	20	*10	15	—	—	12	1.3	0.63	
	2N2746	WH	npn, AJ, si	14.5	200	175	2.0	*100	20	*10	15	—	—	12	1.3	0.63	
	2N2747	WH	npn, AJ, si	14.5	200	175	2.0	*150	20	*10	15	—	—	12	1.3	0.63	
	2N2748	WH	npn, AJ, si	14.5	200	175	2.0	*200	20	*10	15	—	—	12	1.3	0.63	
	2N2763	WH	npn, AJ, si	14.5	200	175	2.0	*50	30	*10	15	—	—	12	1.3	0.63	
HL 13	2N2764	WH	npn, AJ, si	14.5	200	175	2.0	*100	30	*10	15	—	—	12	1.3	0.63	
	2N2765	WH	npn, AJ, si	14.5	200	175	2.0	*150	30	*10	15	—	—	12	1.3	0.63	
	2N2766	WH	npn, AJ, si	14.5	200	175	2.0	*200	30	*10	15	—	—	12	1.3	0.63	
	2N1046	TI	ppn, AD, ge	15	150	100	2	100	10	40	10	—	—	—	—	1.0	
	2N1046A	TI	ppn, AD, ge	15	150	100	2	130	10	20	10	—	—	—	—	—	
	2N1823	WH	npn, AJ, si	16	250	175	2.22	*50	30	*10	5	—	—	6.4	1.5	0.74	
HL 14	2N1824	WH	npn, AJ, si	16	250	175	2.22	*100	30	*10	5	—	—	6.4	1.5	0.74	
	2N1825	WH	npn, AJ, si	16	250	175	2.22	*150	30	*10	5	—	—	6.4	1.5	0.74	
	2N1826	WH	npn, AJ, si	16	250	175	2.22	*200	30	*10	5	—	—	6.4	1.5	0.74	
	2N2751	WH	npn, AJ, si	16	200	175	2.0	*50	20	*10	15	—	—	16	1.5	0.74	
	2N2752	WH	npn, AJ, si	16	200	175	2.0	*100	20	*10	15	—	—	16	1.5	0.74	
	2N2753	WH	npn, AJ, si	16	200	175	2.0	*150	20	*10	15	—	—	16	1.5	0.74	
HL 15	2N2754	WH	npn, AJ, si	16	200	175	2.0	*200	20	*10	15	—	—	16	1.5	0.74	
	2N2769	WH	npn, AJ, si	16	200	175	2.0	*50	30	*10	15	—	—	—	—	—	
	2N2770	WH	npn, AJ, si	16	200	175	2.0	*100	30	*10	15	—	—	16	1.5	0.74	
	2N2771	WH	npn, AJ, si	16	200	175	2.0	*150	30	*10	15	—	—	16	1.5	0.74	
	2N2772	WH	npn, AJ, si	16	200	175	2.0	*200	30	*10	15	—	—	16	1.5	0.74	
	2N1611	DE	ppn, AJ, ge	17	7.5	100	0.1	*60	1.5	—	10	—	0.4w	3	1	0.3	
HL 16	2N1612	DE	ppn, AJ, ge	17	7.5	100	0.1	*60	1.5	—	10	—	0.4w	3	1	0.3	
	2N1015	WH	npn, FJ, si	25	150	150	1.4	*30	7.5	8	10	—	—	5	1	1.5	
	2N1015A	WH	npn, FJ, si	25	150	150	1.4	*60	7.5	8	10	—	—	5	1	1.5	
	2N1015B	WH	npn, FJ, si	25	150	150	1.4	*100	7.5	8	10	—	—	5	1	1.5	
	2N1015C	WH	npn, FJ, si	25	150	150	1.4	150	7.5	8	10	—	—	5	1	1.5	
	2N1015D	WH	npn, FJ, si	25	150	150	1.4	*200	7.5	8	10	—	—	5	1	1.5	
HL 17	2N1015E	WH	npn, FJ, si	25	150	150	1.4	*250	7.5	8	10	—	—	5	1	1.5	
	2N1016	WH	npn, FJ, si	25	150	150	1.4	60	7.5	8	10	—	—	5	1	1.5	
	2N1016A	WH	npn, FJ, si	25	150	150	1.4	100	7.5	8	10	—	—	5	1	1.5	
	2N1016B	WH	npn, FJ, si	25	150	150	1.4	150	7.5	8	10	—	—	5	1	1.5	
	2N1016C	WH	npn, FJ, si	25	150	150	1.4	*200	7.5	8	10	—	—	5	1	1.5	
	2N1016D	WH	npn, FJ, si	25	150	150	1.4	*250	7.5	8	10	—	—	5	1	1.5	
HL 18	2N1016E	WH	npn, FJ, si	25	150	150	1.4	*300	7.5	8	10	—	—	5	1	1.5	
	2N1971	DE	ppn, AJ, ge	25	50	100	0.7	*80	4	—	0.02	—	—	8	2	0.6	
	151-04	WH	npn, AJ, si	25	100	150	1.4	*80	6.0	*11	10	—	—	8	2	0.6	
	151-05	WH	npn, AJ, si	25	100	150	1.4	*100	6.0	*11	10	—	—	8	2	0.6	
	151-06	WH	npn, AJ, si	25	100	150	1.4	*120	6.0	*11	10	—	—	8	2	0.6	
	151-07	WH	npn, AJ, si	25	100	150	1.4	*140	6.0	*11	10	—	—	8	2	0.6	
HL 19	151-08	WH	npn, AJ, si	25	100	150	1.4	*160	6.0	*11	10	—	—	8	2	0.6	
	151-09	WH	npn, AJ, si	25	100	150	1.4	*180	6.0	*11	10	—	—	8	2	0.6	
	151-10	WH	npn, AJ, si	25	100	150	1.4	*200	6.0	*11	10	—	—	8	2	0.6	
	151-11	WH	npn, AJ, si	25	100	150	1.4	*220	6.0	*11	10	—	—	8	2	0.6	
	151-12	WH	npn, AJ, si	25	100	150	1.4	*240	6.0	*11	10	—	—	8	2	0.6	
	151-13	WH	npn, AJ, si	25	100	150	1.4	*260	6.0	*11	10	—	—	8	2	0.6	

Available *ONLY* from **"KEMET"**

100v

**75
60
50
35
20
15
10
6**

J-SERIES (POLAR TYPE) SOLID TANTALUM CAPACITORS

0.1 to 2.7 Microfarads

**Temperature Range:
100v at 85°C. • 67v at 125°C.**

KEMET was first to bring you high-voltage solid tantalums—50, 60, and 75 volts—three big contributions in 2½ years!

Now KEMET pioneers with true *quantity* production of 100-volt units—in hermetically sealed A and B case sizes conforming to Style CS12 and Style CS13 in MIL-C-26655A.

These new 100-volt capacitors show the same resistance to shock and vibration, the same stability of electrical parameters with temperature change, and the same low levels of leakage current as the lower-voltage J-Series units. Also, the maximum dissipation factor has been reduced to 3%—the lowest ever—or one-half the usual J-Series m.d.f.

Today's total J-Series provides microfarad values from .0047 to 330; working voltages of 6, 10, 15, 20, 35, 50, 60, 75, and 100 volts—offering standard E.I.A. values with ±5, 10, and 20% tolerances.

KEMET is your assurance of maximum reliability, since KEMET controls the characteristics of tantalum powder from mine to finished product! For technical data on any member of the J-Series, write to:

"THE SPECIALIST IN SOLID TANTALUM CAPACITORS"

Kemet Department, Linde Company, Division of Union Carbide Corporation, 11901 Madison Avenue, Cleveland 1, Ohio. Telephone: 216-221-0600.


**KEMET DEPARTMENT
LINDE
COMPANY**



"Kemet," "Linde," and "Union Carbide" are registered trade marks of Union Carbide Corporation.

J-Series • Actual Size

Microfarads: Temperatures:
.0047 to 330 -80 to +125°C.
4 cases conform to MIL-C-26655A.
100v units presently available only in military cases A and B.

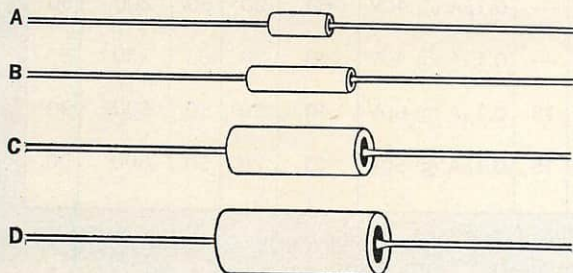

LINDE/KEMET PRODUCTS for Electronics/Aerospace

LINDE Laser/Maser Crystals • Sapphire
• Rare Gases/Mixtures • Cryogenic
Materials • Single Crystal Refractory
Metals • Semiconductor Silicon • Silicon Monoxide • KEMET Barium
Getters and Solid Tantalum Capacitors
(Request Technical Data)

SSPI

TN SERIES

CIRCLE 471 ON READER-SERVICE CARD

TO-5
PANCAKE TO-5 $\frac{7}{16}$ HEX
LOW PROFILE $\frac{7}{16}$ HEX-LUG**PASSIVATED
PLANAR
EPITAXIAL****HIGH
RELIABILITY
WIDE RANGE
PERFORMANCE
CIRCUIT
MINIATURIZATION**

SILICON NPN POWER TRANSISTORS

A NEW GENERATION OF MINIATURE SILICON POWER TRANSISTORS FROM SSPI OFFERING SIGNIFICANTLY IMPROVED PERFORMANCE, "DESIGNED IN" RELIABILITY, AND REDUCED SIZE . . . AT COMPETITIVE PRICES.

Type	Package	Power Dissipation (Case Temp.)	Voltage Ratings		Operating Current Range	$V_{ce(sat)} @ I_c$	Minimum h_{FE}			Maximum $I_{cBO} @ V_{CB}$	Typical f_t Mc	Typical Saturated Switching Times nanoseconds			
			V_{CBO}	V_{CEO} (Sus)								$I_C = 1A \quad I_{B1} = I_{B2} = 100mA$			
												Delay	Rise	Storage	Fall
2N2849	PANCAKE TO-5	5W @ 125°C	100	80	Up to 5A	0.4V @ 1A	50	100	—	0.1μA @ 80V	80	20	40	350	50
2N2850		5W @ 125°C	100	80	"	0.25V @ 1A	25	40	—	0.1μA @ 80V	60	20	50	200	50
2N2851		5W @ 125°C	100	80	"	0.4V @ 1A	25	40	—	0.1μA @ 80V	60	20	50	200	50
2N2852		5W @ 125°C	100	80	"	0.4V @ 1A	15	20	—	0.1μA @ 80V	40	20	60	150	50
2N2853		5W @ 125°C	60	40	"	1.5V @ 5A	—	40	20	0.1μA @ 40V	60	20	50	250	50
2N2854		5W @ 125°C	60	40	"	0.4V @ 1A	50	100	—	0.1μA @ 40V	80	20	40	350	50
2N2855		5W @ 125°C	60	40	"	0.4V @ 1A	25	40	—	0.1μA @ 40V	60	20	50	200	50
2N2856		5W @ 125°C	60	40	"	0.4V @ 1A	15	20	—	0.1μA @ 40V	40	20	60	150	50
2N2657	TO-5	4W @ 100°C	80	50	"	0.5V @ 1A	—	40	15	0.1μA @ 60V	40	20	50	600	90
2N2658	TO-5	4W @ 100°C	100	70	"	0.5V @ 1A	—	40	15	0.1μA @ 60V	40	20	50	600	90

All of the above types optionally available in any of the 4 packages shown.

In addition to the above Preferred Types, the following Types are also available from SSPI:

2N497, 2N498 • 2N545, 2N546, 2N547, 2N548, 2N549, 2N551 • 2N656, 2N657 • 2N1052, 2N1054, 2N1055
2N1116, 2N1117 • 2N1714, 2N1715, 2N1716, 2N1717, 2N1718 2N1719, 2N1720, 2N1721

SOLID STATE

Products, Inc.
ONE PINGREE STREET • SALEM, MASSACHUSETTS

617-745-2900

TWX: 617-744-5297



HL

 continued

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T **f _{ab} (kc)	MAX. RATINGS				CHARACTERISTICS					SWITCHING			Remarks
					P _c (w)	T _j (°C)	w/°C	V _{CEO} *V _{CBO} (v)	I _C (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*i _a)	Pow _r . Gain (db)	Pow _r . Out (w)	t _r (μsec)	t _s (μsec)	V _{ce(sat)} (μa)	
HL 15	151-10	WH	npn, AJ, si	25	100	150	1.4	*200	6.0	*11	10	—	—	8	2	0.6	Microbloc TO-46 Microbloc
	152-04	WH	npn, AJ, si	25	100	150	1.4	*80	6.0	*18	10	—	—	8	2	0.9	
	152-05	WH	npn, AJ, si	25	100	150	1.4	*100	6.0	*18	10	—	—	8	2	0.9	
	152-06	WH	npn, AJ, si	25	100	150	1.4	*120	6.0	*18	10	—	—	8	2	0.9	
	152-07	WH	npn, AJ, si	25	100	150	1.4	*140	6.0	*18	10	—	—	8	2	0.9	
	152-08	WH	npn, AJ, si	25	100	150	1.4	*160	6.0	*18	10	—	—	8	2	0.9	
	152-09	WH	npn, AJ, si	25	100	150	1.4	*180	6.0	*18	10	—	—	8	2	0.9	
HL 16	2N2310	RA	npn, DD, si	50	3	175	0.02	60	0.5	*20	—	—	—	—	—	0.9	Microbloc Microbloc
	2N2311	RA	npn, DD, si	50	3	175	0.02	100	0.5	20	—	—	—	—	—	0.9	
	2N2312	RA	npn, DD, si	60	3	175	0.02	60	0.5	60	—	—	—	—	—	—	
	2N2313	RA	npn, DD, si	60	3	175	0.02	100	0.5	60	—	—	—	—	—	—	
	2N2314	TI	npn, PE, si	80	3	175	0.02	60	0.5	40	0.003	—	—	—	—	—	
	2N2423	TI	npn, PE, si	100	2800	200	16.0	80	1	*40-120	.001	—	—	.040	.100	0.2	
	2N2423A	TI	npn, PE, si	100	2800	200	16.0	80	1	*40-120	.001	—	—	.040	.100	0.2	
HL 17	RT697M	RA	npn, DD, si	100	3	175	0.02	60	0.5	70	0.003	—	—	—	—	—	Microbloc Microbloc Microbloc Microbloc Microbloc Microbloc
	RT1613M	RA	npn, DD, si	100	3	175	0.02	120	0.5	65	0.01	—	—	—	—	—	
	RT1420M	RA	npn, DD, si	100	3	175	0.02	75	0.5	45	0.001	—	—	—	—	—	
	2N1015D	WH	npn, DD, si	130	3	175	0.02	60	0.5	175	0.003	—	—	—	—	—	
	2N1015D	WH	npn, AJ, si	150	1.43	150	*200	7.5	*10	10ma	25	—	—	—	—	—	
	2N1016A	WH	npn, AJ, si	150	1.43	150	*60	7.5	*10	10ma	30	—	—	—	—	—	
	2N1016C	WH	npn, AJ, si	150	1.43	150	*150	7.5	*10	10ma	30	—	—	—	—	—	
HL 18	2N1667	AMP	npn, PADT, ge	200	30	90	—	—	6	90	0.1	—	—	—	—	—	AMP AMP AMP
	2N1668	AMP	npn, PADT, ge	200	30	90	—	—	6	50	0.1	—	—	—	—	—	
	2N1669	AMP	npn, PADT, ge	200	30	90	—	—	70	0.1	—	—	—	—	—	—	
	OC28	AMP	npn, PADT, ge	200	13	90	—	—	6	32	<100	—	—	—	—	—	
	OC29	AMP	npn, PADT, ge	200	13	90	—	—	6	90	<100	—	—	—	—	—	
	OC35	AMP	npn, PADT, ge	200	13	90	—	—	6	50	<100	—	—	—	—	—	
	OC36	AMP	npn, PADT, ge	200	13	90	—	—	6	70	<100	—	—	—	—	—	
HL 19	2N418	BE	npn, AJ, ge	400	60	100	1.2	100	4	60	1.0	—	—	—	—	0.5	CL CL CL CL CL CL CL RCA, BE, CL
	2N420	BE	npn, AJ, ge	400	60	100	1.2	65	4	60	1.0	—	—	15	—	1.7	
	2N420A	BE	npn, AJ, ge	400	60	100	1.2	90	15	60	1.0	—	—	—	—	0.5	
	2N637A	BE	npn, AJ, ge	400	60	100	1.2	60	6	45	1.0	—	—	—	—	0.7	
	2N637B	BE	npn, AJ, ge	400	60	100	1.2	90	6	45	1.0	—	—	—	—	0.7	
	2N638	BE	npn, AJ, ge	400	60	100	1.2	100	6	45	1.0	—	—	—	—	0.7	
	2N638A	BE	npn, AJ, ge	400	60	100	1.2	90	6	30	1.0	—	—	—	—	0.7	
HL 19	2N638B	BE	npn, AJ, ge	400	60	100	1.2	100	6	30	1.0	—	—	—	—	0.7	RCA, BE, CL RCA, BE, CL Infinite heat Sink
	2N456	TI	npn, AJ, ge	430	50	100	0.67	40	5	30-90	0.2	—	—	12	12.5	0.24	
	2N457	TI	npn, AJ, ge	430	50	100	0.67	60	5	30-90	0.6	—	—	12	12.5	0.24	
	2N671	PH	npn, AJ, ge	700	1	85	0.017	40	2	100	20	—	—	—	—	0.35	
	2N2350	GE	npn, PE, si	—	5	200	28.5	*60	1.0	2.5	10ma	—	—	—	—	0.25	
	2N3350A	GE	npn, PE, si	—	5	200	28.5	*60	1.0	2.5	10ma	—	—	—	—	.1	
	2N467	KF	npn, AJ, ge	—	5	110	.07	*60	.5	*45	*40	—	—	—	—	.1	
HL 19	2N468	KF	npn, AJ, ge	—	5	110	.07	*100	.5	*45	*40	—	—	—	—	.1	RCA, BE, CL RCA, BE, CL Infinite heat Sink
	2N469	KF	npn, AJ, ge	—	5	110	.07	*200	.5	*45	*40	—	—	—	—	.1	
	2N2526	MO	npn, AD, ge	—	85	110	1	*80	10	*20/50	3	—	—	5.5	1.2	0.5	
	2N2527	MO	npn, AD, ge	—	85	110	1	*120	10	*20/50	3	—	—	5.5	1.2	0.5	
	2N2528	MO	npn, AD, ge	—	85	110	1	*160	10	*20/50	3	—	—	5.5	1.2	0.5	
	2N2728	MO	npn, AJ, ge	—	170	110	2	*15	50	—	*30	—	—	7	8	.075	

HL *continued*

Cross Index Key	Type No.	Mfr.	Type	f _{ae} *f _T **f _{ab} (mc)	MAX. RATINGS				CHARACTERISTICS					SWITCHING			Remarks
					P _c (w)	T _i (°C)	w/°C	V _{CEO} *V _{CBO} (v)	I _C (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	Powr. Gain (db)	Powr. Out (w)	t _r (μsec)	t _s (μsec)	V _{ce(sat)} (μg)	
HL 20	STC1103	STC	npn,DJ,si	1.0	85	200	0.425	60	6	25-75	0.025	—	—	—	—	—	Infinite heat sink AMF AMF
	STC1104	STC	npn,DJ,si	1.0	85	200	0.425	100	6	25-75	0.025	—	—	—	—	0.3	
	2N673	PH	pnnp,AJ,ge	*1.1	1.0	85	—	*40	2	*100	*20	—	—	—	—	—	
	2N424A	STC	npn,DM,si	2	85	200	0.4	60	3	12-60	10	—	—	—	—	—	
	2N1620	STC	npn,DM,si	2	85	200	0.425	100	5	15-75	1	—	—	—	—	—	AMF
	2N1701	STC	npn,DM,si	2	25	200	0.125	60	2.5	20-80	0.1	—	—	—	—	—	
	2N1702	STC	npn,DM,si	2	75	200	0.375	60	5	15-60	0.2	—	—	—	—	—	
	2N1768	STC	npn,DM,si	2	40	200	0.2	80	3	35-100	.015	—	—	—	—	—	
	2N1769	STC	npn,DM,si	2	40	200	0.2	100	3	35-100	.015	—	—	—	—	—	
	2N551	TR	npn,DJ,si	3	3	200	0.5	60	—	20-80	1.2	—	—	1.2	0.3	0.9	
HL 21	2N552	TR	npn,DJ,si	3	3	200	0.5	30	—	20-80	1.2	—	—	1.2	0.3	0.9	
	2N1055	TR	npn,DJ,si	3	3	200	0.045	100	—	20-80	0.001	—	—	—	—	—	
	2N547	TR	npn,DJ,si	4	5	200	0.5	60	—	20-80	1.2	—	—	0.7	0.2	3.0	
	2N548	TR	npn,DJ,si	4	5	200	0.5	30	—	20-80	0.5	—	—	0.7	0.2	2.0	
	2N549	TR	npn,DJ,si	4	5	200	0.5	60	—	20-80	0.5	—	—	0.7	0.2	1.5	
	2N550	TR	npn,DJ,si	4	5	200	0.5	30	—	20-80	0.5	—	—	0.7	0.2	1.5	
	2N1117	TR	npn,DJ,si	4	5	200	0.5	60	—	40	0.04	—	—	0.7	0.2	1.5	
	2N1116	TR	npn,DJ,si	6	5	200	0.5	60	—	40	1.2	—	—	0.7	0.2	3.0	
	2N1173	WE	npn,AJ,ge	6	—	100	3.33	*35	0.2	80	0.004	—	—	—	—	—	
	ST402	TR	npn,DJ,si	6	50	200	0.33	*60	3	30	20	—	—	0.25	0.5	6	
HL 22	ST403	TR	npn,DJ,si	6	50	200	0.33	*45	3	30	20	—	—	0.25	0.5	5	
	2N1174	WE	npn,AJ,ge	7	—	100	3.33	*35	0.2	85	0.005	—	—	—	—	—	
	2N545	TR	npn,DJ,si	8	5	200	0.5	60	—	15	1.2	—	—	0.3	0.15	3.0	
	2N546	TR	npn,DJ,si	8	5	200	0.5	30	—	15	0.5	—	—	0.3	0.15	2.0	
	2N1052	TR	npn,DJ,si	8	5	200	.045	*60	—	15	0.001	—	—	—	—	—	
	2N1212	TR	npn,DJ,si	10	85	200	0.27	*60	3000	12-60	1000	—	—	—	—	3.5	
	2N2229	WH	npn,AJ,si	*10	150	150	2.0	*200	10	*100	10	—	—	8	3	2.2	
	2N1054	TR	npn,DJ,si	12	5	200	.045	*125	—	20-80	.0004	—	—	—	—	—	
	2N1208	TR	npn,DJ,si	12	85	200	0.27	*60	5	15	1.0	—	—	0.25	—	3	
	2N1209	TR	npn,DJ,si	12	85	200	0.27	*45	5	20	2.0	—	—	0.25	—	3	
HL 23	2N1250	TR	npn,DJ,si	12	85	200	0.27	60	5	15	1.0	—	—	0.25	—	3	
	ST401	TR	npn,DJ,si	12	85	200	0.27	*45	5	20	2.0	—	—	0.25	—	3	
	2N1907	TI	pnnp,AD,ge	*20	150	—	—	100	20	*10	0.3	—	—	—	—	1.7	
	2N1908	TI	pnnp,AD,ge	*20	150	—	—	130	20	*10	0.3	—	—	—	—	1.7	
	2N1072	WE	npn,DD,si	30	12	150	65	75	1	13	0.1	—	—	0.05	0.05	—	
	2N1041	TI	npn,AJ,ge	33	20	100	0.27	100	3	33	50	—	—	—	—	—	
	2N498	FA	npn,DP,si	*50	4.0	200	22.8	100	—	*27	*0.0004	—	—	—	—	—	
	2N978	FA	pnnp,DD,si	*50	1.75	150	0.010	20	—	*40	*0.1	—	—	—	—	—	
	2N1893	FA	npn,DP,si	*50	3	200	17.2	—	—	—	.0003	—	—	—	—	—	
	2N1984	FA	npn,DM,si	*50	2	150	16.0	25	—	40	1.0	—	—	—	—	—	
HL 24	2N1985	FA	npn,DM,si	*50	2	150	16.0	25	—	40	1.0	—	—	—	—	—	
	2N1986	FA	npn,DM,si	*50	2.0	150	16.0	25	—	100	1.0	—	—	—	—	—	
	2N1987	FA	npn,DD,si	*50	2.0	150	16.0	25	—	50*	1.0	—	—	—	—	—	
	2N1988	FA	npn,DM,si	*50	2	150	16.0	45	—	70	1.0	—	—	—	—	—	
	2N1989	FA	npn,DM,si	*50	2	150	16.0	60	—	40	1.0	—	—	—	—	—	
	2N1991	FA	pnnp,DM,si	*50	2.0	150	16.0	*30	—	40	.005*	—	—	—	—	—	
	2N656	FA	pnnp,DP,si	*60	4.0	200	0.0228	60	—	*60	*0.004	—	—	—	—	—	
	2N657	FA	npn,DP,si	*60	4.0	200	0.0228	60	100	—	*60	*0.0004	—	—	—	—	
	2N912	FA	npn,DP,si	*60	1.8	200	10.3	60	—	42	.0003μa	—	—	—	—	—	
	2N1975	FA	npn,DP,si	*60	3	200	17.2	60	—	42	.003μa	—	—	—	—	.24	
HL 25	2N1978	FA	npn,DP,si	*60	30	200	0.17	40	—	40	*0.001	—	—	—	—	—	
	2N2102	RCA	npn,PL,si	*60	5	—	—	120	10	*20	—	—	—	—	—	—	
	2N2270	RCA	npn,PL,si	*60	5	—	—	60	10	*35	—	—	—	—	—	—	
	RT5202	RA	npn,DD,si	60	5	175	0.033	175	0.5	50	0.001	—	—	—	—	—	
	RT5230	RA	npn,DD,si	60	2	175	0.013	30	0.5	50	—	—	—	—	—	—	
	TA6200	FA	npn,DP,si	*60	4.0	200	0.0228	—	—	*80	—	—	—	—	—	—	
	2N526	SY	pnnp,AJ,ge	64	225	100	3	*45	500	10	—	—	3	—	—	—	
	2N1925	GE	pnnp,AJ,ge	64	225	85	—	40	500	4	—	—	—	—	—	—	
	2N698	FA	npn,DP,si	*70	3.0	200	22.8	*60	—	40	.0003	—	—	0.08	—	—	
	2N721	FA	pnnp,DP,si	*70	1.5	175	10.0	35	—	30	*0.01	—	—	—	—	—	
HL 26	2N870	FA	npn,DP,si	*70	1.8	200	10.3	60	—	80	0.0003	—	—	—	—	—	
	2N911	FA	npn,DP,si	*70	1.8	200	10.3	60	—	*70	*0.0003	—	—	—	—	—	
	2N1131	FA	pnnp,DP,si	*70	2	175	13.3	*50	—	*30	*0.01	—	—	0.08	—	—	
	2N1409	PSI	npn,MS,si	70	2.8	150	0.024	30	0.5	30	10	7	1	0.06	0.1	0.8	
	2N1410	PSI	npn,MS,si	70	2.8	150	0.024	45	0.5	60	10	7	1	0.042	0.17	0.8	
	2N1889	FA	npn,DP,si	*70	3	200	17.2	60	—	*60	*0.0003	—	—	—	—	—	
	2N1974	FA	npn,DP,si	*70	3	200	17.2	60	—	*70	*0.0003	—	—	—	—	—	
	2N1987	FA	npn,DM,si	*70	2	150	0.0016	40	—	50	—	—	—	—	—	—	
	2N696	FA	npn,DP,si	*80	2	175	13.3	*60	—	*40	0.01	—	—	0.08	0.03	—	
	2N717	FA	npn,DP,si	*80	1.5	175	10	*60	—	*40	0.01	—	—	0.08	—	—	

HL continued

Cross Index Key	Type No.	Mfr.	Type	f _{ce} *f _T **f _{db} (mc)	MAX. RATINGS				CHARACTERISTICS					SWITCHING			Remarks	
					P _c (w)	T _j (°C)	w/°C	V _{CEO} *V _{CBO} (v)	I _C (a)	h _{FE} *h _{FE}	I _{CO} (ma) (*μa)	P _{owr} Gain (db)	P _{owr} Out (w)	t _r (μsec)	t _s (μsec)	V _{ce(sat)} (μa)		
HL 27	2N719	FA	nnp, DP, si	*80	1.5	175	10	60	—	40	0.01	—	—	—	0.08	—	—	PSI, RA, GI, MH, TI, TR
	2N719A	FA	nnp, DP, si	*80	1.8	200	10.3	60	—	*40	*0.0003	—	—	—	—	—	—	GI, TI
	2N722	FA	nnp, DP, si	*80	1.5	175	10	35	—	*60	*0.01	—	—	—	—	—	—	HU, TI, TR
	2N1132	FA	nnp, DP, si	*80	2	175	13.3	—	—	*35	*0.1	—	—	—	0.08	0.05	—	TR, IND, PSI, TI, RA
	2N1252	FA	nnp, DP, si	*80	2	175	13.3	—	—	—	—	—	—	—	—	—	—	RA, GI, TI, PSI
HL 28	2N1613	FA	nnp, DP, si	*80	3	200	17.2	50	—	80	0.0004	17	—	—	0.08	—	—	Microbloc
	RT482	RA	nnp, DD, si	80	2	175	0.0134	20	0.5	50	0.02	—	—	—	—	—	—	—
	RT483	RA	nnp, DD, si	80	2	175	0.0134	40	0.5	40	0.02	—	—	—	—	—	—	—
	RT484	RA	nnp, DD, si	80	2	175	0.0134	40	0.5	70	0.02	—	—	—	—	—	—	—
	RT688M	RA	nnp, DD, si	80	3	175	0.02	120	0.5	40	0.01	—	—	—	—	—	—	—
HL 29	RT5151	RA	nnp, DD, si	80	2	175	0.013	45	0.5	60	—	—	—	—	—	—	—	—
	RT5152	RA	nnp, DD, si	80	2	175	0.013	45	0.5	60	—	—	—	—	—	—	—	—
	RT5203	RA	nnp, DD, si	80	2	175	0.013	40	0.5	70	—	—	—	—	—	—	—	—
	RT5204	RA	nnp, DD, si	80	2	175	0.013	30	0.5	70	—	—	—	—	—	—	—	—
	RT5212	RA	nnp, DD, si	80	2	175	0.013	60	0.5	70	—	—	—	—	—	—	—	—
HL 30	2N699	FA	nnp, DP, si	*100	2	175	13.3	80	—	65	0.01	—	—	—	0.08	—	—	NA, TR, PSI, RA, US
	2N718	FA	nnp, DP, si	*100	1.5	175	10	40	—	75	0.01	—	—	—	0.08	—	—	NA, GI, PSI, RA, TI, TR
	2N718A	FA	nnp, DP, si	*100	1.8	200	0.01	50	—	80	*0.0004	—	—	—	—	—	—	TI, RA
	2N720	FA	nnp, DP, si	*100	1.5	175	10	80	—	65	0.01	—	—	—	0.08	—	—	PSI, RA, NA, GI, TI, TR
	2N720A	FA	nnp, DP, si	*100	1.8	200	0.01	100	—	80	*0.0004	—	—	—	—	—	—	GI, RA
HL 31	2N730	TI	nnp, MS, si	100	1.5	175	0.01	60	—	30	0.01	—	—	—	0.11	0.14	0.9	FA
	2N731	TI	nnp, MS, si	100	1.5	175	0.01	60	—	60	0.01	—	—	—	0.11	0.14	0.9	FA
	2N871	FA	nnp, DP, si	*100	1.8	200	0.01	80	—	130	0.0004	—	—	—	—	—	—	TR, IND, PSI,
	2N909	FA	nnp, DP, si	*100	1.5	175	0.01	30	—	150	*0.01	—	—	—	—	—	—	RA, NA, GI, TI
	2N910	FA	nnp, DP, si	*100	1.8	200	0.01	80	—	100	0.005	—	—	—	—	—	—	GI, TI, RA
HL 32	2N1060	WE	nnp, MS, si	100	—	150	2	40	0.05	40	*0.001	—	—	—	—	—	—	TI, RA
	2N1253	FA	nnp, DP, si	*100	2	175	13.3	20	—	45	0.01	—	—	—	0.08	0.05	—	RA
	2N1420	FA	nnp, DP, si	100	2w	175	13.3	30	—	130	0.1	—	—	—	—	—	—	Microbloc, RA
	2N1444	WE	nnp, DM, si	100	—	150	4	60	0.25	25	*0.002	—	—	—	—	—	—	Microbloc, RA
	2N1711	FA	nnp, DP, si	*100	3	200	0.017	50	—	130	*0.0004	—	—	—	—	—	—	Microbloc, RA
HL 33	2N1890	FA	nnp, DP, si	*100	3	200	0.017	80	—	130	*0.0004	—	—	—	—	—	—	CL, Epitaxial, RA
	2N1972	FA	nnp, DP, si	*100	2	175	0.013	30	—	150	*0.01	—	—	—	—	—	—	Epitaxial
	2N1973	FA	nnp, DP, si	*100	3	200	0.017	80	—	100	*0.005	—	—	—	—	—	—	Epitaxial
	2N1983	FA	nnp, DM, si	*100	2	150	0.0016	35	—	140	—	—	—	—	—	—	—	Epitaxial
	2N2315	RA	nnp, DP, si	100	3	175	0.02	60	0.5	70	0.003	—	—	—	—	—	—	Epitaxial
HL 34	2N2316	RA	nnp, DP, si	100	3	175	0.02	120	0.5	65	0.01	—	—	—	—	—	—	Epitaxial
	2N2317	RA	nnp, DP, si	100	3	175	0.02	75	0.5	45	0.001	—	—	—	—	—	—	Epitaxial
	2N2317	FA	nnp, DP, si	*150	1.2	200	0.007	25	—	45	*0.0008	—	—	—	—	—	—	Epitaxial
	2N2318	GI	nnp, PE, si	*400	1.2	200	0.007	60	—	70	0.003	—	—	—	—	—	—	Epitaxial
	2N2319	FA	nnp, DP, si	*400	1.2	200	0.007	25	—	80*	0.002*	—	—	—	—	—	—	Epitaxial
HL 35	2N2320	FA	nnp, DP, si	*400	1.2	200	0.0069	—	—	*50	*0.005	—	—	—	—	—	—	Epitaxial
	2N2321	MO	nnp, DDPL, si	400	3	175	5.33	60	—	20-60	0.01	—	—	—	—	—	—	Epitaxial
	2N2321	MO	nnp, DDPL, si	400	3	175	5.33mw	*60	—	40-120	0.01	—	—	—	—	—	—	Epitaxial
	2N2322	MO	nnp, DDPL, si	400	3	175	5.33mw	*60	—	100	0.01	—	—	—	—	—	—	Epitaxial
	2N2322	MO	nnp, DDPL, si	400	1.8	175	3.33mw	*60	—	20-60	0.01	—	—	—	—	—	—	Epitaxial
HL 36	2N2323	MO	nnp, DDPL, si	400	1.8	175	3.33mw	*60	—	40-120	0.01	—	—	—	—	—	—	Epitaxial
	2N2327	GI	nnp, PE, si	*400	3	175	5.33	35	—	*20-60	0.01	—	—	—	—	—	—	Epitaxial
	2N2328	GI	nnp, PE, si	*400	3	175	5.33	35	—	*40-120	0.01	—	—	—	—	—	—	Epitaxial
	2N2328	GI	nnp, PE, si	*400	3	175	5.33	35	—	*40-120	0.01	—	—	—	—	—	—	Epitaxial
	2N2328	GI	nnp, PE, si	*400	3	175	5.33	35	—	*100-300	0.01	—	—	—	—	—	—	Epitaxial
HL 37	2N2390	GI	nnp, PE, si	*400	1.8	175	3.33	35	—	*20-60	0.01	—	—	—	—	—	—	Epitaxial
	2N2391	GI	nnp, PE, si	*400	1.8	175	3.33	35	—	*40-120	0.01	—	—	—	—	—	—	Epitaxial
	2N2392	GI	nnp, PE, si	*400	1.8	175	3.33	35	—	*100-300	0.01	—	—	—	—	—	—	Epitaxial
	2N2392	GI	nnp, PE, si	*400	1.8	175	3.33	35	—	*50	*0.004	—	—	—	—	—	—	Epitaxial
	2N2392	GI	nnp, PE, si	*400	1.8	175	3.33	35	—	50	0.0004	—	—	—	—	—	—	Epitaxial
HL 38	2N2394	FA	nnp, DP, si	*450	1.2	200	0.007	20	—	*40*	*0.004	—	—	—	—	—	—	GI, CL, MO
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.007	20	—	*40*	*0.004	—	—	—	—	—	—	GI, CL, Epitaxial, MO
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*40	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
HL 39	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
HL 40	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
HL 41	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—	*70	*0.1	—	—	—	—	—	—	—
	2N2398	FA	nnp, DP, si	*450	1.2	200	0.0069	15	—</									

HL *continued*

Cross Index Key	Type No.	Mfr.	Type	f_{ae} $\times f_T$ $\times f_{ab}$ (mc)	MAX. RATINGS				CHARACTERISTICS				SWITCHING				Remarks
					P_c (w)	T_j (°C)	$w/^\circ C$	V_{CEO} $\times V_{CBO}$ (v)	I_C (a)	I_{FE} $\times I_{FE}$	I_{CO} (ma) (* μa)	$P_{wr.}$ Gain (db)	$P_{wr.}$ Out (w)	t_r (μsec)	t_s (μsec)	$V_{ce(sat)}$ (μa)	
HL 34	2N1837	GE	npn, P, si	—	2	175	13.3	*80	—	*120	—	—	—	—	—	0.8	GI RA
	2N1837A	GE	npn, P, si	—	2.8	175	18.6	*80	—	*120	—	—	—	—	—	0.8	
	2N1841	WE	npn, D, si	—	1.00	150	100	60	2.0	25	0.0001	—	—	—	—	—	
	2N1890	FA	npn, DM, si	—	2	150	0.0016	—	—	40	—	—	—	—	—	0.35	
	2N2243	GE	npn, PE, si	—	2.8	200	16.0	80	—	2.5	—	—	—	—	—	—	
	2N2243A	GE	npn, PE, si	—	2.8	200	16.0	80	—	2.5	—	—	—	—	—	0.16	
	2N2285	BE	pnp, DAP, ge	—	—	110	1250	60	25	50	5	7	4	—	—	—	
HL 35	2N2286	BE	pnp, DAP, ge	—	—	110	1250	100	25	50	5	7	4	0.4	—	—	
	2N2287	BE	pnp, DAP, ge	—	—	110	1250	120	25	50	5	7	4	0.4	—	—	
	2N2288	BE	pnp, DAP, ge	—	—	110	1250	40	10	50	5	7	4	0.5	—	—	
	2N2289	BE	pnp, DAP, ge	—	—	110	1250	80	10	50	5	7	4	0.5	—	—	
	2N2290	BE	pnp, DAP, ge	—	—	110	1250	120	10	50	5	7	4	0.5	—	—	
	2N2291	BE	pnp, DAP, ge	—	—	110	1250	80	10	75	5	7	4	0.5	—	—	
	2N2293	BE	pnp, DAP, ge	—	—	110	1250	120	10	75	5	7	4	0.5	—	—	
HL 36	2N2294	BE	pnp, DAP, ge	—	—	110	1250	40	10	75	5	7	4	0.5	—	—	TO-51 co-planar ft = 600 mc
	2N2295	BE	pnp, DAP, ge	—	—	110	1250	80	10	75	5	7	4	0.5	—	—	
	2N2296	BE	pnp, DAP, ge	—	—	110	1250	120	10	75	5	7	4	0.5	—	—	
	2N2357	BE	pnp, DAP, ge	—	—	110	2000	170	50	50	5	7	4	0.5	—	—	
	2N2358	BE	pnp, DAP, ge	—	—	110	2000	170	50	50	5	7	4	0.5	—	—	
	2N2359	BE	pnp, DAP, ge	—	—	110	2000	170	50	50	5	7	4	0.5	—	—	
	2N2389	TI	npn, PL, si	—	2.0	—	—	35	0.6	*0.120	—	—	—	—	—	1.5	
HL 37	2N2390	TI	npn, PL, si	—	2.0	—	—	35	0.6	*100-300	—	—	—	—	—	1.5	TO-51 co-planar ft = 1000 mc
	2N2393	TI	pnp, PL, si	—	1.2	—	—	35	0.3	*20-45	—	—	—	—	—	1.5	
	2N2394	TI	pnp, PL, si	—	2.0	—	—	35	0.3	*30-90	—	—	—	—	—	1.5	
	2N2395	TI	npn, PL, si	—	2.0	—	—	40	0.3	*20-60	—	—	—	—	—	1.0	
	2N2396	TI	npn, PL, si	—	2.0	—	—	40	0.3	*40-120	—	—	—	—	—	1.0	
	2N2397	SY	npn, EP, si	—	300	200	1.7	35	200	25	0.10	2.5	25	20	0.3	—	
	2N2410	TI	npn, PE, si	—	2.5	100	2.0	30	0.8	*30-120	—	—	—	—	—	0.45	
HL 38	2N2455	SY	pnp, EP, ge	—	150	100	2.0	15	200	40	2.0	3.5	30	60	0.19	—	7/16 Hex TO-5 Pancake
	2N2456	SY	pnp, EP, ge	—	150	100	2.0	15	200	40	2.0	3.0	15	65	0.19	—	
	PA0T50	AMP	pnp, PADT, ge	—	16.5	75	—	75	0.75	—	—	—	—	—	—	—	
	RT5401	RA	npn, si	—	0.7	200	—	30	—	6.0	0.1	—	—	—	—	2.5	
	RT5402	RA	npn, si	—	0.7	200	—	30	—	6.0	0.1	—	—	—	—	2.0	
	RT5403	RA	npn, si	—	0.7	200	—	60	—	5.5	0.1	—	—	—	—	3.0	
	RT5404	RA	npn, si	—	0.7	200	—	60	—	5.5	0.1	—	—	—	—	2.0	
HL 38	ST8014	TR	pnp, DM, si	—	0.6	175	—	20	—	85	0.001	—	—	0.08	—	1.5	Pancake TO-5
	TN61	SSP	npn, PE, si	—	5	200	—	60	5	45	0.00002	—	—	—	0.3	0.5	
	TN62	SSP	npn, PE, si	—	5	200	—	60	5	45	0.00002	—	—	—	0.3	0.5	
	TN61	SSP	npn, PE, si	—	5	200	0.004	60	5	45	0.00002	—	—	—	0.3	0.5	
	TN62	SSP	npn, PE, si	—	5	200	0.004	60	5	80	0.00002	—	—	—	0.3	0.5	
	TN71	SSP	npn, PE, si	—	5	200	0.005	60	5	45	0.00002	—	—	—	0.3	0.5	
	TN72	SSP	npn, PE, si	—	5	200	0.005	60	5	80	0.00002	—	—	—	0.3	0.5	

FIELD EFFECT

In order of transconductance.

Cross Index Key	Type No.	Mfr.	Channel & Construction	g_m (μmhos)	V_p (v)	I_{DSS} (ma)	C_{is} or C_{DG}	BV_{DGO} or BV_{DGS} (v)	NF (db)
FE 1	18A1	GE	p, GD, si	30 min	1	0.05	5	-10	-
	C620	CT	n, A, si	75	10	0.1	35	10	-
	C622	CT	n, A, si	75	10	0.1	35	10	-
	C624	CT	n, A, si	75	10	0.1	35	10	-
	2N2841	SI	p, DP, si	90	0.8	-50	4	*20	1.5
	18A2	GE	p, GD, si	100 min	1	0.25	5	-10	-
	C621	CT	n, A, si	100	10	0.35	35	10	-
	C623	CT	n, A, si	100	10	0.35	35	10	-
	C625	CT	n, A, si	100	10	0.35	35	10	-
	2N2606	SI	p, DP, si	175	2	-0.17	4	*30	1.5
FE 2	C632	CT	n, A, si	175	250	1.0	23	250	-
	C633	CT	n, A, si	175	350	1.0	23	350	-
	C631	CT	n, A, si	200	150	1.0	23	150	-
	U-110	SI	p, DP, si	200	3	-0.31	4	*20	-
	C610	CT	n, A, si	250	40	0.6	35	40	-
	C614	CT	n, A, si	250	40	0.6	35	40	-
	2N2842	SI	p, DP, si	270	0.8	-150	7	*20	1.5
	C611	CT	n, A, si	400	40	3.0	35	40	-
	18A3	GE	p, GD, si	500 min	1	0.75	5	-10	-
	XF600	SIG	pn, DP, si	500	2-3	0.5	-	30	-
FE 3	2N2607	SI	p, DP, si	525	2	-0.52	7	*30	1.5
	FE200	AI	n, DP, si	600	10	1.0	*1.5	50	-
	C612	CT	n, A, si	650	40	3.0	35	40	-
	C615	CT	n, A, si	750	40	1.5	35	40	-
	2N2843	SI	p, DP, si	800	0.8	-450	12	*20	1.5
	2N2386	TI, TS	p, DP, si	1000 min	8	-	50	20	-
	2N2497	TI	p, DP, si	1000 min	5	-3 max	32	20	-
	2N2500	TI	p, DP, si	1000 min	6	-6 max	32	20	-
	2N2794	TS	p, DP, si	1000 min	-	0.01	6	20	-
	18A4	GE	p, GD, si	1000 min	2	2.0	5	-10	-
FE 4	C613	CT	n, A, si	1000	40	3.0	35	40	-
	FG34	AI	n, DP, si	1000	20	10	-	50	-
	FG35	AI	n, DP, si	1000	20	-	-	100	-
	FG36	AI	n, DP, si	1000	20	-	-	150	-
	FG37	AI	n, DP, si	1000	20	-	-	200	-
	XF601	SIG	pn, DP, si	1000	2-3	1.0	-	30	-
	FE300	AI	n, DP, si	1250	10	3.0	*1.5	50	-
	2N2498	TI	p, DP, si	1500 min	6	-6 max	32	20	-
	18A5	GE	p, GD, si	1500 min	2	5.0	5	-10	-
	2N2608	SI	p, DP, si	1600	2	-1.60	12	*30	1.5
FE 5	U-112	SI	p, DP, si	1900	3	-3.0	12	*20	-
	2N2844	SI	p, DP, si	2000	0.8	-1000	25	*20	1.5
	18A6	GE	p, GD, si	2000 min	2	12.0	5	-10	-
	C640	CT	n, A, si	2000	35	4.0	35	35	-
	2N2499	TI	p, DP, si	2500 min	8	-15 max	32	20	-
	MM763	MO	n, P, si	3000	2	2	50	25	-
	MM764	MO	n, P, si	3200	3	4	50	25	-
	MM765	MO	n, P, si	3500	6.5	10	50	25	-
	2N2609	SI	p, DP, si	3600	2	-3.60	25	*30	1.5
	C641	CT	n, A, si	4000	35	8.0	35	35	-
FE 6	C642	CT	n, A, si	6000	35	12.0	35	35	-
	C643	CT	n, A, si	9000	35	18.0	35	35	-
	C644	CT	n, A, si	12000	35	24.0	35	35	-
	C650	CT	n, A, si	-	45	-	-	45	-
	C651	CT	n, A, si	-	35	-	-	35	-
	C652	CT	n, A, si	-	25	-	-	25	-
	C653	CT	n, A, si	-	15	-	-	15	-

when
conditions
are
critical...

the choice is
atlee
transistor
clips

HERE'S WHY . . .

HOLDING POWER—atlee clips are specially contoured to flex under tension. Their grip actually increases as shock and vibration increases. **PROVEN RESULTS**—no visible shifting or twisting—no lead-breaking resonance—holding power unchanged by heat or constant use.

COOLING EFFICIENCY—atlee clips, acting as heat sinks, approach within 10% of "infinity". **PROVEN RESULTS**—operation of transistor at maximum ratings without life shortage.

ELECTRICAL INSULATION—atlee clips are available with Dalcoat B coating, an enamel combining twice the dielectric strength of Teflon with equal heat conductivity of mica. **PROVEN RESULTS**—proper electrical insulation from chassis and proper thermal behavior.

SEND FOR TRANSISTOR APPLICATION TABLE—A comprehensive listing of atlee clips for specific transistor application.



atlee corporation

2 LOWELL AVENUE • WINCHESTER, MASS.

PARKVIEW 9-5800

ON READER-SERVICE CARD CIRCLE 472

UNIJUNCTION

Listed by type number.

Cross Index	Type No.	Mfr.	Type	R _{BO} (K)	η (max)	E _O (p)	I _P (p)	V _E (sat)	V _{EB2} (v)	V _{OB1} (v)	Remarks
UNJ 1	2N489	GE	n, si	6.8	.62	12	20	5	60	3	TI
	2N488A	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N489B	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N490	GE	n, si	9.1	.62	120	15	4	60	3	TI
	2N490A	GE	n, si	9.1	.62	120	15	4	60	3	TI
UNJ 2	2N492	GE	n, si	9.1	.68	12	20	5	60	3	TI
	2N492A	GE	n, si	9.1	.68	12	15	4.3	60	3	TI
	2N492B	GE	n, si	9.1	.68	12	15	4.3	60	3	TI
	2N492C	GE	n, si	9.1	.68	12	20	4.3	60	3	TI
	2N493	GE	n, si	6.8	.75	12	20	5	60	3	TI
UNJ 3	2N494	GE	n, si	6.8	.75	12	15	4.6	60	3	TI
	2N493A	GE	n, si	6.8	.75	12	15	4.6	60	3	TI
	2N493B	GE	n, si	6.8	.75	12	15	4.6	60	3	TI
	2N494A	GE	n, si	9.1	.75	12	15	4.6	60	3	TI
	2N494B	GE	n, si	9.1	.75	12	15	4.6	60	3	TI
UNJ 4	2N494C	GE	n, si	9.1	.75	12	20	4.6	60	3	TI
	2N494D	GE	n, si	9.1	.75	12	20	4.6	60	3	TI
	2N494E	GE	n, si	9.1	.75	12	20	4.6	60	3	TI
	2N494F	GE	n, si	9.1	.75	12	20	4.6	60	3	TI
	2N494G	GE	n, si	9.1	.75	12	20	4.6	60	3	TI
UNJ 5	2N495	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N495A	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N495B	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N495C	GE	n, si	6.8	.62	12	15	4	60	3	TI
	2N495D	GE	n, si	6.8	.62	12	15	4	60	3	TI



AVAILABLE AT THESE DISTRIBUTORS

EAST

Binghamton, N.Y.—Federal Electronics
P.O. Box 208/PI 8-8211
Philadelphia 23, Penn.
Almo Industrial Electronics, Inc.
412 North 6th Street/WA 2-5918
Pittsburgh 6, Penn.—Radio Parts Company, Inc.
6401 Penn Avenue/EM 1-4600
Newton 58, Mass.—Greene-Shaw Co.
341 Watertown Street/WO 9-8900
New York 36, N.Y.—Harvey Radio Company, Inc.
103 West 43rd Street/JU 2-1500
Syracuse 11, N.Y.—Harvey Electronics-Syracuse, Inc.
Pickard Drive, P.O. Box 185/GL 4-9282
Baltimore 11, Md.—Radio Electric Service Company
5 North Howard Street/LE 9-3835

SOUTH

Birmingham 5, Ala.—Forbes Distributing Company, Inc.
2610 Third Avenue, South/AL 1-4104
West Palm Beach, Fla.—Goddard, Inc.
1309 North Dixie/TE 3-5701
Richmond 20, Va.—Meridian Electronics, Inc.
1001 West Broad Street/EL 5-2834
Detroit 3, Mich.—Glendale Electronic Supply Company
12530 Hamilton Avenue/TU 3-1500
Minneapolis 16, Minn.—Admiral Distributors, Inc.
5305 Cedar Lake Road, St. Louis Park/LI 5-8811
Indianapolis 25, Ind.—Graham Electronics Supply, Inc.
122 South Senate Avenue/ME 4-8486
Cleveland 1, Ohio—Pattison Supply Company
777 Rockwell Avenue/EX 1-4944
Chicago 30, Ill.—Merquip Electronics, Inc.
4939 North Elston Avenue/AV 2-5400
Cincinnati 10, Ohio—United Radio, Inc.
1308 Vine Street/CH 1-6530
Kansas City 11, Mo.—Walters Radio Supply, Inc.
3635 Main Street/VA 1-8058

MIDWEST

Dallas 1, Texas—Adleta Company
1907 McKinney Ave./RI 1-3151
Houston 1, Texas—Harrison Equipment Company, Inc.
1422 San Jacinto Street/CA 4-9131
Monrovia, Cal.—Lynch Electronics, Inc.
1818 South Myrtle Avenue/EL 9-8261/MU 1-2706
San Diego 1, Cal.—Radio Parts Company
2060 India Street, Box 2710/32-8951
Los Angeles 15, Cal.—Radio Products Sales, Inc.
1501 South Hill Street/RI 8-1271
San Jose 13, Cal.—Schad Electronic Supply, Inc.
499 South Market Street/298-0511
Denver, Colo.—B. Walker Radio Company
300 Bryant Street/WE 5-2401
Seattle 1, Wash.—C & G Electronics Company
2221-3rd Avenue/Main 4-4355
Albuquerque, N.M.—Midland Specialty Co., Inc.
1712 Loma Blvd., N.E./247-2486
Phoenix, Ariz.—Midland Specialty Co., Inc.
1930 North 22nd Ave./258-4531
Tucson, Ariz.—Midland Specialty Co., Inc.
951 South Park Ave./MA 4-2315

WEST

Ask for a complete catalog

DELCO
RELIABILITY
RADIO
RELIABILITY

Division of General Motors, Kokomo, Indiana

NEW



VCE

VCE

No.	V _{ce} I _{ce} =5ma	V _{ce} Sustaining	h _{FE}		V _{ce} Sat.		V _{be} Sat.	
			I _c =5A	I _c =10A	I _c =5A	I _c =10A	I _c =5A	I _c =10A
2N2580	400	325v	10 min. 40 max.		0.7v		1.5v	
2N2581	400	325v	25 min. 65 max.	10 min.		1.0v		1.7v
2N2582	500	325v	10 min. 40 max.		0.7v		1.5v	
2N2583	500	325v	25 min. 65 max.	10 min.		1.0v		1.7v

New from Delco Radio! Silicon power transistors with V_{ceo}, V_{cbo} and V_{ces} of 400 and 500 volts in two gain ranges. This new line of high power transistors permits never-before-possible simplification of design in a wide area of applications. Available at all Delco Radio distributors or through our sales offices. Right now.

DELCO
DEPENDABILITY
RADIO
RELIABILITY
Division of General Motors,
Kokomo, Indiana

Union, New Jersey
324 Chestnut Street
MURdock 7-3770
AREA CODE 201

Detroit, Michigan
57 Harper Avenue
TRinity 3-6560
AREA CODE 313

Palo Alto, California
201 Town & Country Village
DAvenport 6-0365
AREA CODE 415

Santa Monica, California
726 Santa Monica Blvd.
UPTon 0-8807
AREA CODE 213

Syracuse, New York
1054 James Street
GRanite 2-2668
AREA CODE 315

Chicago, Illinois
5151 N. Harlem Ave.
775-5411
AREA CODE 312

Kokomo, Indiana
700 E. Firmin St.
GLadstone 2-8211, Ext. 500
AREA CODE 317



HOW TO USE THE CROSS INDEX

Types are listed in numerical sequence. EIA-registered types come first, followed by house-numbered types. The code following each type identifies its application category and the block of 10 types in which it is located. A3, for example, means the type can be found in the third block of the Audio section. Key to the letter codes is: A = audio and general purpose, P = power, HF = high frequency, LL = low-level switching, HL = high-level switching, FE = field effect, UNJ = unijunction.

2N34	A12	2N241	A25, 31	2N343A	P2	2N426	LL14	2N498A	P3, HL33	2N574	P73	2N661	LL28
2N35	A12	2N242	P34	2N343B	P3	2N427	LL22	2N499	HF54	2N574A	P73	2N662	LL17
2N43	A20	2N243	A3	2N344	HF72	2N428	LL27	2N501	LL38	2N575	P73	2N663	P37
2N43A	A23	2N244	A13	2N345	HF72	2N428A	LL23	2N501A	LL38	2N575A	P73	2N665	P40
2N44	A11	2N247	HF55	2N346	HF30	2N438	HF4, LL7	2N502	HF49	2N576	LL11	2N666	P18, 60
2N44A	A15	2N250	P40	2N347	A2	2N438A	HF4, LL47	2N502A	HF49	2N576A	LL16	2N671	HL19
2N78	A43	2N251	P40	2N348	A2	2N439	LL11, HF7, 8	2N503	HF51	2N578	LL11	2N673	HL20
2N78A	A43	2N255	P27	2N349	A1	2N439A	HF7, LL47	2N504	HF55	2N579	LL17	2N677	P50
2N84	HF2	2N255A	P27, 49	2N350	P18	2N440	HF11, LL20	2N508	P41	2N580	LL25	2N677A	P50
2N84A	HF6	2N256	P27, 36	2N350A	P49	2N440A	HF11, LL47	2N511	P65	2N581	LL25	2N677B	P50
2N100	LL15	2N256A	P28, 49	2N351	P19	2N441	P65	2N511A	P65	2N582	HF15, LL24, 27	2N677C	P50
2N102/13	A4	2N257	P35	2N351A	P49	2N442	P65	2N511B	P65	2N583	LL27	2N678	P51
2N104	A20	2N265	A41	2N356	HF4, LL7	2N443	P65	2N512	P65	2N584	LL25, 27	2N678A	P51
2N109	A26, 31	2N268	P35, HL33	2N356A	LL7	2N444A	HF1	2N512A	P66	2N585	LL11	2N678B	P51
2N117	A3	2N268A	HL33	2N357	HF7, LL13	2N445A	HF4	2N512B	P66	2N586	LL47	2N678C	P51
2N118	A7	2N269	LL24, 46	2N357A	LL13	2N446A	HF7	2N513	P66	2N587	LL47	2N679	LL6
2N118A	HF12	2N270	A25	2N358	LL19, HF10	2N447A	HF11	2N513A	P66	2N588	HF47	2N695	HF50
2N119	A17	2N274	HF17	2N358A	LL19	2N448	HF7	2N513B	P66	2N591	A30	2N696	HF31, P8, HL26
2N120	A33	2N277	P54	2N359	A43	2N449	HF9	2N514	P66	2N592	A11	2N697	HF32, P9
2N122	P18	2N278	P54	2N360	A38	2N450	LL11	2N514A	P66	2N594	A13	2N698	HF33, P11, HL25
2N123	LL11, 16	2N279	A13	2N361	A30, 32	2N456	HL18	2N514B	P66	2N595	A20	2N699	HF31, P9, HL28
2N128	HF28	2N280	A22	2N362	A38	2N456A	P65, HL7	2N515	HF3	2N596	A27	2N699B	P15
2N129	A8	2N281	A30	2N363	A23	2N457	HL19	2N516	HF3	2N597	LL17, 48	2N700	HF62
2N129	HF2, 8	2N282	A30	2N370	HF17	2N457A	P65, HL7	2N517	HF3	2N598	LL17	2N700A	HF62
2N140	HF10	2N284	A5	2N371	HF18	2N458	HL6	2N518	LL20	2N599	LL26	2N702	HF33, LL37
2N144/13	A4	2N284A	A5	2N372	HF18	2N458A	P65, HL7	2N519	LL6	2N600	LL17, 21	2N703	HF33, 52, LL37
2N155	P27	2N285	A5	2N373	HF18	2N459	HL6	2N519A	HF3, LL8	2N601	LL26	2N705	LL39
2N156	P27	2N285A	P32	2N374	HF18	2N460	A11	2N520	LL7, 10	2N602	HF16	2N705A	LL48
2N158	P27	2N292	HF6	2N375	HL6	2N461	A16	2N520A	HF7, LL10	2N602A	HF14	2N706	HF31, 52, P3
2N158A	P27	2N293	HF9	2N376	P19	2N463	P36	2N521	LL20	2N603	HF40	2N706A	LL36, 48
2N160	A1	2N295	P32	2N376A	P49	2N464	A12	2N521A	HF10, LL21	2N603A	HF10	2N706B	HF52, 65, LL42
2N160A	A1	2N297	HL5	2N377	HF7, LL14	2N465	A20	2N522	LL27	2N604	HF72	2N706C	HF52, 65
2N161	A1	2N297A	P49, HL5	2N377A	LL46	2N466	A36	2N522A	HF15, LL27	2N604A	HF77	2N707	HF52, 65
2N161A	A1	2N298	P49, HL5	2N378	HL6	2N467	A44	2N523	LL30	2N609	A	2N707A	HF52
2N163	A2	2N301	P23, 45	2N379	P58, HL6	2N470	A3	2N523A	HF17, LL30	2N610	A	2N708A/46	HF52
2N163A	A2	2N301A	P23, 45	2N380	P58, HL6	2N471	A3	2N524	A13	2N618	HL5	2N708B/46	HF52
2N167	LL19	2N306	A12	2N381	A11	2N471A	HF9	2N524A	A12	2N618A	HF5	2N708C/46	HF52
2N167A	LL46	2N307	P24, 36	2N382	A19	2N472	A3	2N525	A20	2N627	P50	2N708/51	HF52
2N168	HF9	2N307A	P26	2N383	A17	2N472A	HF9, A4	2N525A	A15	2N628	P50	2N708A/51	HF53
2N168A	HF9	2N312	HF55, LL6	2N384	HF32	2N473	HF11	2N526	A26, HL25	2N629	P50	2N708B/51	HF53
2N169	HF9	2N315	LL11	2N385	HF6	2N474	HF12	2N527	A34, 36	2N630	P50	2N708C/51	HF53
2N169A	A44	2N315A	LL11	2N385A	LL8	2N474A	HF12	2N527A	A31	2N631	A43	2N707	HF1, 50, P3, LL48
2N173	P64	2N316	LL23	2N386	LL16, HF9	2N475	HF12	2N529	A6	2N632	A38	2N707A	LL42
2N174	P64	2N316A	LL23	2N386A	LL11, 26, 46, HF6, 15	2N475A	A9	2N530	A10	2N633	A28	2N708	HF57, 59, 66, P5, LL40, 48, HL32
2N174A	P46	2N317	LL28	2N389	P47	2N476	HF15	2N531	A12	2N634	HF7	2N708/46	HF57
2N175	A29	2N317A	LL28	2N395	A15	2N477	HF12	2N532	A15	2N635	LL48	2N708/51	HF57
2N176	P19, 49	2N318	A15	2N395A	P47	2N478	HF12	2N533	A18	2N635A	LL23	2N709	HF52, 63, P3, LL48, HL32
2N178	P37	2N320	A23	2N393	HF22	2N479	HF12	2N534	A38	2N636	LL27	2N709A	HF52
2N186A	A10	2N321	A25, 34	2N394	LL19, HF6	2N479A	HF12	2N535	A38	2N636A	LL25, 48	2N709/46	HF52
2N187A	A17	2N322	A20	2N395	LL16, HF9	2N480	HF12	2N535A	A38	2N637	HL18	2N709/51	HF52
2N188A	A26	2N323	A26, 30	2N396	LL11, 16	2N480A	A19	2N535B	LL6	2N637A	HL18	2N709A	HF52
2N189	A10	2N324	A36	2N396A	LL20, 23, HF13	2N481	HF4	2N537	LL42, HF63	2N638	HL18	2N709A/46	HF53
2N190	A17	2N326	P16	2N397	LL46	2N482	HF7	2N538	P35	2N638A	HL18	2N710	HF47, LL40
2N191	A26	2N327A	LL2, 3	2N398	LL46	2N483	HF5	2N539	P35	2N639	HL18	2N710A	LL48
2N192	A31	2N328A	LL2, 3, 6	2N398A	A29	2N484	HF12	2N540	P35	2N640	P47	2N711	LL40
2N193	HF2	2N329	LL1, 23	2N399	P32	2N485	HF8	2N541	HF14	2N641	P42	2N711A	LL40, 49
2N194	HF3	2N329A	LL1, 23	2N399A	LL47	2N486	HF13	2N542	HF14	2N642	P42	2N711B	LL40
2N194A	HF3	2N330A	A11	2N400	P32	2N489	UNJ1	2N543	HF14	2N643	HF20	2N712	LL17
2N207	A37	2N331	A14, 23, LL3	2N401	P38	2N489A	UNJ1	2N544	HF14	2N644	HF20	2N713	HF40
2N207A	A38	2N332	A3	2N404	LL23	2N490	UNJ1	2N545	A38	2N645	LL32	2N714	HF40
2N207B	A38	2N332A	A3	2N404A	LL8	2N491	UNJ1	2N546	LL21	2N646	LL32	2N715	HF40
2N211	HF3	2N333	A7	2N405	A15	2N492	UNJ1	2N547	LL21	2N647	LL32	2N716	HF40
2N212	HF6	2N333A	A3	2N406	A10, 16	2N493	UNJ1	2N548	LL21	2N648	LL32	2N717	HF40
2N213	A31	2N334	A8	2N407	A29	2N494	UNJ1	2N549	LL21	2N649	LL32	2N718	HF40
2N213A	A46	2N334A	A7	2N408	A25, 29	2N495	UNJ1	2N550	LL21	2N650	LL32	2N719	HF40
2N214	A25	2N335	A17	2N409	HF8	2N496	UNJ1	2N551	LL21	2N651	LL32	2N720	HF40
2N215	A20	2N335A	A17	2N410	HF8, 65	2N497	UNJ1	2N552	LL21	2N652	LL32	2N721	HF40
2N217	A26, 31	2N335B	LL46	2N411	HF11	2N498	UNJ1	2N553	LL21	2N653	LL32	2N722	HF40
2N218	HF8, 64	2N336	A33	2N413	HF4	2N499	UNJ1	2N554	LL21	2N654	LL32	2N723	HF40
2N219	HF11	2N336A	A34, LL46	2N414	HF3	2N500	UNJ1	2N555	LL21	2N655	LL32	2N724	HF40
2N220	A28	2N337	LL28	2N414A	LL11, HF8	2N501	UNJ1	2N556	LL21	2N656	LL32	2N725	HF40
2N228	A25	2N337A	LL32	2N414A	HF6	2N502	UNJ1	2N557	LL21	2N657	LL32	2N726	HF40
2N229	A11, P64	2N338	LL31	2N414B	HF11	2N503	UNJ1	2N558	LL21	2N658	LL32	2N727	HF40
2N231	HF55	2N339	P2	2N416	HF11	2N504	UNJ1	2N559	LL21	2N659	LL32	2N728	HF40
2N232	HF15	2N339A	A5	2N417	LL18, HF15	2N505	UNJ1	2N560	LL21	2N660	LL32	2N729	HF40
2N233	HF55	2N340	P2	2N418	HF18	2N506	UNJ1	2N561	LL21	2N661	LL32	2N730	HF40
2N233A	HF3	2N340A	A5	2N419	HF18	2N507	UNJ1	2N562	LL21	2N662	LL32	2N731	HF40
2N234A	P31	2N341	P2	2N420	HF18	2N508	UNJ1	2N563	LL21	2N663	LL32	2N732	HF40
2N235A	P31	2N341A	A5, P2	2N420A	HF18	2N509	UNJ1	2N564	LL21	2N664	LL32	2N733	HF40
2N235B	P31	2N342	P2	2N422	A23	2N510	UNJ1	2N565	LL21	2N665	LL32	2N734	HF40
2N236A	P31	2N342A	P2	2N424	P47	2N511	UNJ1	2N566	LL21	2N666	LL32	2N735	HF40
2N236B	P34	2N342B	P2	2N424A	HL20	2N512	UNJ1	2N567	LL21	2N667	LL32	2N736	HF40
2N240	LL46	2N343	P2	2N425	LL8	2N513	UNJ1	2N568	LL21	2N668	LL32	2N737	HF40

2N736B	HF33	2N915	HF55, 6R, PS, HL30	2N1064A	HL11	2N1183A	P17	2N1357	LL24	2N1529A	P54	2N1670	A8
2N738	A16, HF22	2N916	HF2, 50, S7	2N1064B	HL11	2N1183B	P17	2N1358	LL24	2N1530	P54	2N1671	UNJ5
2N739	A30, HF22		PS, 8R, HL30	2N1067	P37	2N1184	P17	2N1358A	HL7	2N1530A	P54	2N1671A	UNJ5
2N739A	HF33	2N917	A22, HF63	2N1047A	P37	2N1184A	P17	2N1358B	P53	2N1531	P54	2N1671B	UNJ5
2N740	A39, HF22		LL50, HL32	2N1047B	P37	2N1184B	P17	2N1359	PS3	2N1531A	P54	2N1672	A32
2N740A	HF33	2N918	A23, HF64	2N1047C	P37	2N1185	A45	2N1360	PS3	2N1532	P55	2N1675	P63
2N741	HF56		LL45, LL33	2N1048	P37	2N1186	A22	2N1362	PS4	2N1532A	P55	2N1676	HF71
2N741A	HF56	2N920	HF33	2N1048A	P4, 37	2N1187	A35	2N1363	PS4	2N1533	P55	2N1678	HL11
2N742	A18	2N921	HF34	2N1048B	P38	2N1188	A42	2N1364	PS4	2N1534	P55	2N1683	LL53
2N743	HF54, 57, 66	2N922	HF34	2N1048C	P38	2N1190	A18	2N1365	PS4	2N1534A	P55	2N1684	HF71
2N743/46	HF54	2N923	A8	2N1049	P38	2N1192	A32	2N1370	A35	2N1535	P55	2N1685	LL19
2N743/51	HF54	2N924	A21	2N1049A	P38	2N1193	A44	2N1371	A35	2N1535A	P55	2N1690	P39
2N744	HF54, 59,	2N925	A6	2N1049B	P38	2N1194	A45	2N1372	A14, 20	2N1536	P55	2N1691	P39
	66, LL44	2N926	A16	2N1049C	P38	2N1195	HF63, LL43	2N1373	A14, 20	2N1536A	P55	2N1692	P12
2N744/46	HF55	2N927	A5	2N1050	P38	2N1196	HF21	2N1374	A26, 35	2N1537	P55	2N1693	P12
2N744/51	HF55	2N928	A16	2N1050A	P38	2N1199	HF27	2N1375	A26, 35	2N1537A	P56	2N1694	LL53
2N745	LL21	2N929	A19, HF28, 41, 68	2N1050B	P38	2N1199B	LL20	2N1376	A33, 37	2N1538	P56	2N1700	P15
2N746	LL28	2N930A	HF34	2N1050C	P38	2N1202	P35	2N1377	A37	2N1539	P56	2N1701	HL20
2N747	LL31	2N931	A40, HF28, 41, 68	2N1051	AB, LL8	2N1203	PS5	2N1378	A44	2N1540	P56	2N1702	HL20
2N748	LL31	2N930A	HF34	2N1052	LL22	2N1204	HF69, LL43	2N1379	A45	2N1541	P56	2N1703	P46
2N750	HF20	2N934	HF70	2N1054	LL22	2N1204A	LL43	2N1380	A15, 39	2N1541A	P56	2N1704	P41
2N751	HF13	2N935	A4	2N1055	HL21	2N1206	P4, 63	2N1381	A35	2N1542	P56	2N1705	A41
2N753	HF67	2N936	A13	2N1056	LL31	2N1207	P4, 63	2N1382	A35	2N1542A	P56	2N1706	A37
2N754	HF21	2N937	A28	2N1057	LL2	2N1208	HL22	2N1383	A24	2N1543	P57	2N1707	LL53
2N755	HF21	2N938	A5	2N1058	HF6	2N1209	HL22	2N1384	LL52	2N1544	P57	2N1709	HF18, P23
2N756	A4	2N939	A13	2N1059	A25	2N1210	P43	2N1385	LL45	2N1544A	P57	2N1710	HF18, P23
2N756A	A4, 6	2N940	A28	2N1060	LL31, HL29	2N1211	P43	2N1395	HF18	2N1545	P57	2N1711	HF71, P12, HL29
2N757	A7	2N941	A23	2N1065	HF17	2N1212	HL22	2N1396	HF35	2N1546	P57	2N1714	P19
2N757A	A7, 13	2N942	A23	2N1066	HF39	2N1213	LL50	2N1397	HF39	2N1547	P57	2N1715	P19
2N758	A8	2N943	A46	2N1067	P15	2N1214	LL50	2N1398	HF70	2N1548	P57	2N1716	P19
2N758A	A8, 26	2N944	A46	2N1068	P19	2N1215	LL50	2N1399	HF70	2N1549	P57	2N1717	P19
2N759	HF33	2N945	A46	2N1069	P40	2N1216	LL51	2N1400	HF70	2N1549A	P57	2N1718	P20
2N759A	A17, HF23	2N946	A46	2N1070	P40	2N1217	LL51	2N1401	HF70	2N1550	P58	2N1719	P20
2N759B	HF33	2N947	HF51, PS, HL31	2N1072	HL23	2N1218	P16	2N1401A	HF70	2N1551	P58	2N1720	P20
2N760	A34, HF23	2N955	HF64, 68	2N1073	P42, 52, HL4	2N1219	LL31	2N1402	HF50	2N1552	P58	2N1721	P20
2N760A	A34, HF23	2N956	HF23	2N1073A	P42, 52, HL4	2N1220	LL45	2N1403	LL9, 52	2N1553	P58	2N1722	P41
2N760B	HF33	2N957	A28, HF9, 45, 48, P2	2N1073B	P42, 52, HL4	2N1221	LL13	2N1404	HF50	2N1554	P58	2N1723	P41
2N760B	HF33	2N958	HF50, 60	2N1074	P62	2N1222	LL7	2N1405	HF56	2N1555	P58	2N1724	P41
2N761	A8	2N959	HF50, 60	2N1085	P62	2N1223	LL7	2N1407	HF56	2N1556	P58	2N1725	HF42
2N762	A22	2N961	HF50, 60	2N1086	HF10	2N1224	HF18, 34	2N1409	HF39, HL26	2N1557	P58	2N1726	HF42
2N768	HF57, LL38, 45	2N962	HF50, 60	2N1086A	HF10	2N1225	HF35	2N1410	HF39, HL26	2N1558	P58	2N1727	HF42
2N769	HF67, LL45		69, LL40	2N1087	HF10	2N1226	HF35	2N1411	LL36, 52	2N1559	P58	2N1728	HF42
2N770A	LL44	2N963	69, LL40	2N1090	HF8, LL15	2N1228	LL4	2N1412	HL7	2N1560	P59	2N1729	HF42
2N770B	LL44	2N964	HF61	2N1091	HF14, LL24	2N1229	LL4	2N1413	LL52	2N1561	P59	2N1730	HF42
2N780	A34		HF50, 61	2N1094	HF63, LL45	2N1230	LL4	2N1414	LL52	2N1562	P59	2N1731	HF42
2N781	HF57, LL49	2N964A	HF50, 61	2N1095	A2	2N1231	LL4	2N1415	LL52	2N1563	P59	2N1732	HF42
2N782	HF67, LL49		HF51, 61	2N1096	A2	2N1232	LL4	2N1416	HF12	2N1564	P59	2N1733	HF42
2N783	HF67	2N965	HF51, 61	2N1097	A27	2N1233	LL4	2N1417	HF13	2N1565	P59	2N1734	HF42
2N784	HF67		HF51, 61	2N1098	A21	2N1234	LL2, 5	2N1418	HF13	2N1566	P59	2N1735	HF42
2N784A	HF54, LL40	2N966	HF51, 61	2N1099	P67	2N1235	LL5, HL3	2N1419	PS, HL29	2N1567	P59	2N1736	HF42
2N784A/46	HF54		69, LL41	2N1100	P67	2N1236	LL5, HL3	2N1420	HF39, HL26	2N1568	P59	2N1737	HF42
2N784A/51	HF54	2N967	HF51	2N1101	P67	2N1237	LL5, HL3	2N1421	HF39, HL26	2N1569	P59	2N1738	HF42
2N789	LL14	2N968	HF51	2N1102	A12	2N1238	LL5, HL3	2N1422	HF39, HL26	2N1570	P59	2N1739	HF42
2N790	LL17	2N969	HF53	2N1103	A12	2N1239	LL5, HL4	2N1423	HF39, HL26	2N1571	P59	2N1740	HF42
2N791	LL22	2N970	HF53	2N1104	LL16	2N1240	LL5, HL4	2N1424	HF39, HL26	2N1572	P59	2N1741	HF42
2N792	LL17	2N971	HF53	2N1105	LL16	2N1241	LL5, HL4	2N1425	HF39, HL26	2N1573	P59	2N1742	HF42
2N793	LL24	2N972	HF53	2N1106	LL21	2N1242	LL5, HL4	2N1426	HF39, HL26	2N1574	P59	2N1743	HF42
2N794	LL49	2N973	HF53	2N1107	HL21	2N1243	LL3, HL4	2N1427	HF39, HL26	2N1575	P59	2N1744	HF42
2N795	LL49	2N974	HF53	2N1108	HL21	2N1244	LL3, HL4	2N1428	HF39, HL26	2N1576	P59	2N1745	HF42
2N797	HF64, LL45	2N975	HF54	2N1109	LL29, 50	2N1245	A8, 42	2N1429	HF39, HL26	2N1577	P59	2N1746	HF42
2N799	LL9	2N976	LL45	2N1110	P40	2N1246	A5	2N1430	HF39, HL26	2N1578	P59	2N1747	HF42
2N800	LL9	2N977	PS, HL23	2N1111	HL29	2N1247	HL29	2N1431	HF39, HL26	2N1579	P59	2N1748	HF42
2N801	LL8	2N978	HF34	2N1112	LL50	2N1248	HL29	2N1432	HF39, HL26	2N1580	P59	2N1749	HF42
2N802	LL8	2N979	HF34	2N1113	LL50	2N1249	HL29	2N1433	HF39, HL26	2N1581	P59	2N1750	HF42
2N803	LL12	2N980	HF34	2N1114	LL50	2N1250	HL29	2N1434	HF39, HL26	2N1582	P59	2N1751	HF42
2N804	LL12	2N981	HF34	2N1115	LL50	2N1251	HL29	2N1435	HF39, HL26	2N1583	P59	2N1752	HF42
2N805	LL21	2N982	HF34	2N1116	LL50	2N1252	HL29	2N1436	HF39, HL26	2N1584	P59	2N1753	HF42
2N806	LL25	2N983	HF34	2N1117	LL50	2N1253	HL29	2N1437	HF39, HL26	2N1585	P59	2N1754	HF42
2N807	LL25	2N984	HF34	2N1118	LL50	2N1254	HL29	2N1438	HF39, HL26	2N1586	P59	2N1755	HF42
2N808	LL12	2N985	HF34	2N1119	LL50	2N1255	HL29	2N1439	HF39, HL26	2N1587	P59	2N1756	HF42
2N815	LL12	2N986	HF34	2N1120	LL50	2N1256	HL29	2N1440	HF39, HL26	2N1588	P59	2N1757	HF42
2N816	LL17	2N987	HF34	2N1121	LL50	2N1257	HL29	2N1441	HF39, HL26	2N1589	P59	2N1758	HF42
2N817	LL12	2N988	HF34	2N1122	LL50	2N1258	HL29	2N1442	HF39, HL26	2N1590	P59	2N1759	HF42
2N818	LL7	2N989	HF34	2N1123	LL50	2N1259	HL29	2N1443	HF39, HL26	2N1591	P59	2N1760	HF42
2N819	LL12	2N990	HF34	2N1124	LL50	2N1260	HL29	2N1444	HF39, HL26	2N1592	P59	2N1761	HF42
2N820	LL12	2N991	HF34	2N1125	LL50	2N1261	HL29	2N1445	HF39, HL26	2N1593	P59	2N1762	HF42
2N821	LL21	2N992	HF34	2N1126	LL50	2N1262	HL29	2N1446	HF39, HL26	2N1594	P59	2N1763	HF42
2N822	LL21	2N993	HF34	2N1127	LL50	2N1263	HL29	2N1447	HF39, HL26	2N1595	P59	2N1764	HF42
2N823	LL20	2N994	HF34	2N1128	LL50	2N1264	HL29	2N1448	HF39, HL26	2N1596	P59	2N1765	HF42
2N824	LL9	2N995	HF34	2N1129	LL50	2N1265	HL29	2N1449	HF39, HL26	2N1597	P59	2N1766	HF42
2N825	LL12	2N996	HF34	2N1130	LL50	2N1266	HL29	2N1450	HF39, HL26	2N1598	P59	2N1767	HF42
2N826	LL12	2N997	HF34	2N1131	LL50	2N1267	HL29	2N1451	HF39, HL26	2N1599	P59	2N1768	HF42
2N827	LL12	2N998	HF34	2N1132	LL50	2N1268	HL29	2N1452	HF39, HL26	2N1600	P59	2N1769	HF42
2N828	HF67, LL42	2N1000	HF34	2N1133	LL50	2N1269	HL29	2N1453	HF39, HL26	2N1601	P59	2N1770	HF42
2N829	HF57, LL42	2N1001	HF34	2N1134	LL50	2N1270	HL29	2N1454	HF39, HL26	2N1602	P59	2N1771	HF42
2N834	HF50, 59,	2N1011	PS, HL6	2N1135	LL50	2N1271	HL29	2N1455	HF39, HL26	2N1603	P59	2N1772	HF42
	67, LL44	2N1012	LL13	2N1136	LL50	2N1272	HL29	2N1456	HF39, HL26	2N1604	P59	2N1773	HF42
2N834/46	HF59	2N1013	P40	2N1137	LL50	2N1273	HL29	2N1457	HF39, HL26	2N1605	P59	2N1774	HF42
2N834/51	HF59	2N1014	P40	2N1138	LL50	2N1274	HL29	2N1458	HF39, HL26				

201932	201933	201934	201935	201936	201937	201938	201939	201940	201941	201942	201943	201944	201945	201946	201947	201948	201949	201950	201951	201952	201953	201954	201955	201956	201957	201958	201959	201960	201961	201962	201963	201964	201965	201966	201967	201968	201969	201970	201971	201972	201973	201974	201975	201976	201977	201978	201979	201980	201981	201982	201983	201984	201985	201986	201987	201988	201989	201990	201991	201992	201993	201994	201995	201996	201997	201998	201999	202000	202001	202002	202003	202004	202005	202006	202007	202008	202009	202010	202011	202012	202013	202014	202015	202016	202017	202018	202019	202020	202021	202022	202023	202024	202025	202026	202027	202028	202029	202030	202031	202032	202033	202034	202035	202036	202037	202038	202039	202040	202041	202042	202043	202044	202045	202046	202047	202048	202049	202050	202051	202052	202053	202054	202055	202056	202057	202058	202059	202060	202061	202062	202063	202064	202065	202066	202067	202068	202069	202070	202071	202072	202073	202074	202075	202076	202077	202078	202079	202080	202081	202082	202083	202084	202085	202086	202087	202088	202089	202090	202091	202092	202093	202094	202095	202096	202097	202098	202099	202100	202101	202102	202103	202104	202105	202106	202107	202108	202109	202110	202111	202112	202113	202114	202115	202116	202117	202118	202119	202120	202121	202122	202123	202124	202125	202126	202127	202128	202129	202130	202131	202132	202133	202134	202135	202136	202137	202138	202139	202140	202141	202142	202143	202144	202145	202146	202147	202148	202149	202150	202151	202152	202153	202154	202155	202156	202157	202158	202159	202160	202161	202162	202163	202164	202165	202166	202167	202168	202169	202170	202171	202172	202173	202174	202175	202176	202177	202178	202179	202180	202181	202182	202183	202184	202185	202186	202187	202188	202189	202190	202191	202192	202193	202194	202195	202196	202197	202198	202199	202200	202201	202202	202203	202204	202205	202206	202207	202208	202209	202210	202211	202212	202213	202214	202215	202216	202217	202218	202219	202220	202221	202222	202223	202224	202225	202226	202227	202228	202229	202230	202231	202232	202233	202234	202235	202236	202237	202238	202239	202240	202241	202242	202243	202244	202245	202246	202247	202248	202249	202250	202251	202252	202253	202254	202255	202256	202257	202258	202259	202260	202261	202262	202263	202264	202265	202266	202267	202268	202269	202270	202271	202272	202273	202274	202275	202276	202277	202278	202279	202280	202281	202282	202283	202284	202285	202286	202287	202288	202289	202290	202291	202292	202293	202294	202295	202296	202297	202298	202299	202300	202301	202302	202303	202304	202305	202306	202307	202308	202309	202310	202311	202312	202313	202314	202315	202316	202317	202318	202319	202320	202321	202322	202323	202324	202325	202326	202327	202328	202329	202330	202331	202332	202333	202334	202335	202336	202337	202338	202339	202340	202341	202342	202343	202344	202345	202346	202347	202348	202349	202350	202351	202352	202353	202354	202355	202356	202357	202358	202359	202360	202361	202362	202363	202364	202365	202366	202367	202368	202369	202370	202371	202372	202373	202374	202375	202376	202377	202378	202379	202380	202381	202382	202383	202384	202385	202386	202387	202388	202389	202390	202391	202392	202393	202394	202395	202396	202397	202398	202399	202400	202401	202402	202403	202404	202405	202406	202407	202408	202409	202410	202411	202412	202413	202414	202415	202416	202417	202418	202419	202420	202421	202422	202423	202424	202425	202426	202427	202428	202429	202430	202431	202432	202433	202434	202435	202436	202437	202438	202439	202440	202441	202442	202443	202444	202445	202446	202447	202448	202449	202450	202451	202452	202453	202454	202455	202456	202457	202458	202459	202460	202461	202462	202463	202464	202465	202466	202467	202468	202469	202470	202471	202472	202473	202474	202475	202476	202477	202478	202479	202480	202481	202482	202483	202484	202485	202486	202487	202488	202489	202490	202491	202492	202493	202494	202495	202496	202497	202498	202499	202500	202501	202502	202503	202504	202505	202506	202507	202508	202509	202510	202511	202512	202513	202514	202515	202516	202517	202518	202519	202520	202521	202522	202523	202524	202525	202526	202527	202528	202529	202530	202531	202532	202533	202534	202535	202536	202537	202538	202539	202540	202541	202542	202543	202544	202545	202546	202547	202548	202549	202550	202551	202552	202553	202554	202555	202556	202557	202558	202559	202560	202561	202562	202563	202564	202565	202566	202567	202568	202569	202570	202571	202572	202573	202574	202575	202576	202577	202578	202579	202580	202581	202582	202583	202584	202585	202586	202587	202588	202589	202590	202591	202592	202593	202594	202595	202596	202597	202598	202599	202600	202601	202602	202603	202604	202605	202606	202607	202608	202609	202610	202611	202612	202613	202614	202615	202616	202617	202618	202619	202620	202621	202622	202623	202624	202625	202626	202627	202628	202629	202630	202631	202632	202633	202634	202635	202636	202637	202638	202639	202640	202641	202642	202643	202644	202645	202646	202647	202648	202649	202650	202651	202652	202653	202654	202655	202656	202657	202658	202659	202660	202661	202662	202663	202664	202665	202666	202667	202668	202669	202670	202671	202672	202673	202674	202675	202676	202677	202678	202679	202680	202681	202682	202683	202684	202685	202686	202687	202688	202689	202690	202691	202692	202693	202694	202695	202696	202697	202698	202699	202700	202701	202702	202703	202704	202705	202706	202707	202708	202709	202710	202711	202712	202713	202714	202715	202716	202717	202718	202719	202720	202721	202722	202723	202724	202725	202726	202727	202728	202729	202730	202731	202732	202733	202734	202735	202736	202737	202738	202739	202740	202741	202742	202743	202744	202745	202746	202747	202748	202749	202750	202751	202752	202753	202754	202755	202756	202757	202758	202759	202760	202761	202762	202763	202764	202765	202766	202767	202768	202769	202770	202771	202772	202773	202774	202775	202776	202777	202778	202779	202780	202781	202782	202783	202784	202785	202786	202787	202788	202789	202790	202791	202792	202793	202794	202795	202796	202797	202798	202799	202800	202801	202802	202803	202804	202805	202806	202807	202808	202809	202810	202811	202812	202813	202814	202815	202816	202817	202818	202819	202820	202821	202822	202823	202824	202825	202826	202827	202828	202829	202830	202831	202832	202833	202834	202835	202836	202837	202838	202839	202840	202841	202842	202843	202844	202845	202846	202847	202848	202849	202850	202851	202852	202853	202854	202855	202856	202857	202858	202859	202860	202861	202862	202863	202864	202865	202866	202867	202868	202869	202870	202871	202872	202873	202874	202875	202876	202877	202878	202879	202880	202881	202882	202883	202884	202885	202886	202887	202888	202889	202890	202891	202892	202893	202894	202895	202896	202897	202898	202899	202900	202901	202902	202903	202904	202905	202906	202907	202908	202909	202910	202911	202912	202913	202914	202915	202916	202917	202918	202919	202920	202921	202922	202923	202924	202925	202926	202927	202928	202929	202930	202931	202932	202933	202934	202935	202936	202937	202938	202939	202940	202941	202942	202943	202944	202945	202946	202947	202948	202949	202950	202951	202952	202953	202954	202955	202956	202957	202958	202959	202960	202961	202962	202963	202964	202965	202966	202967	202968	202969	202970	202971	202972	202973	202974	202975	202976	202977	202978	202979	202980	202981	202982	202983	202984	202985	202986	202987	202988	202989	202990	202991	202992	202993	202994	202995	202996	202997	202998	202999	203000	203001	203002	203003	203004	203005	203006	203007	203008	203009	203010	203011	203012	203013	203014	203015	203016	203017	203018	203019	203020	203021	203022	203023	203024	203025	203026	203027	203028	203029	203030	203031	203032	203033	203034	203035	203036	203037	203038	203039	203040	203041	203042	203043	203044	203045	203046	203047	203048	203049	203050	203051	203052	203053	203054	203055	203056	203
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-----

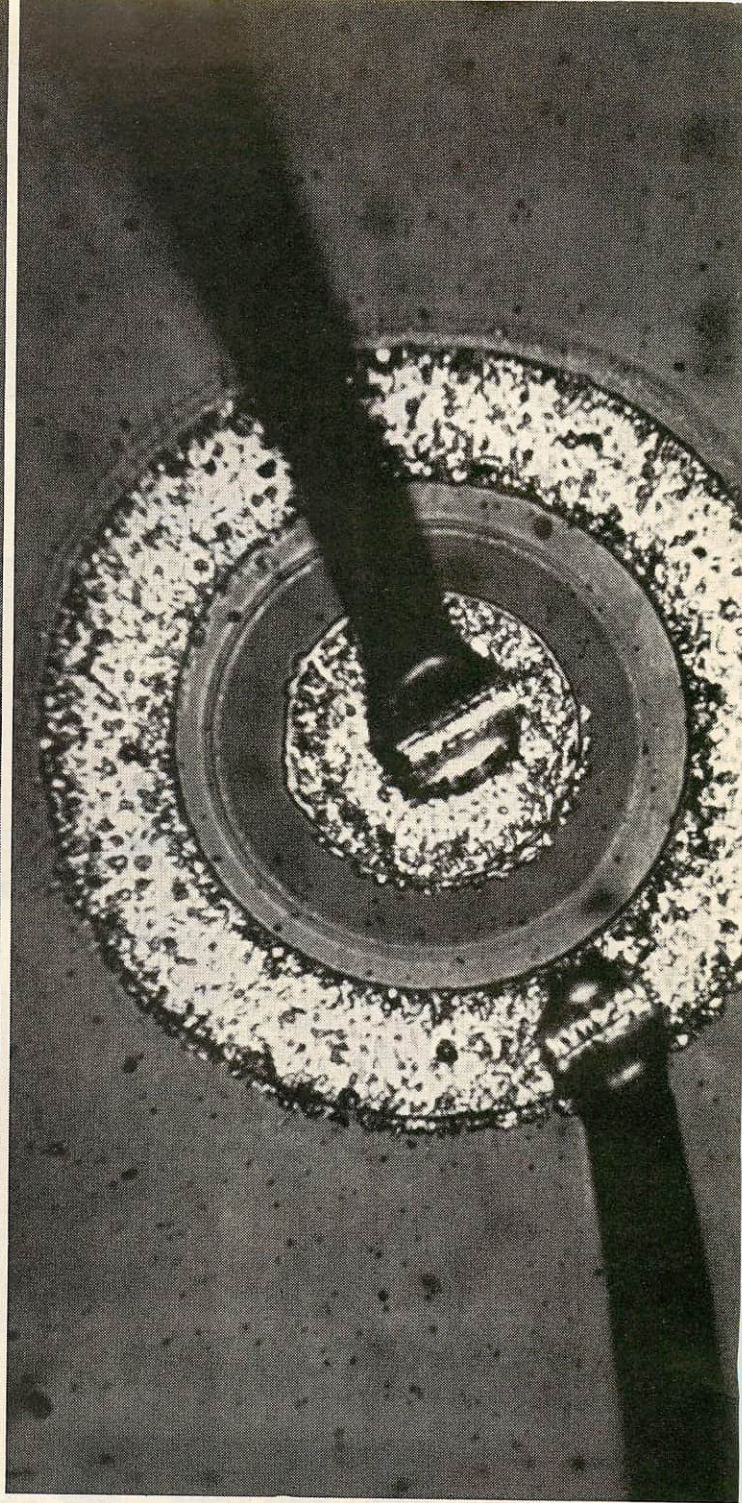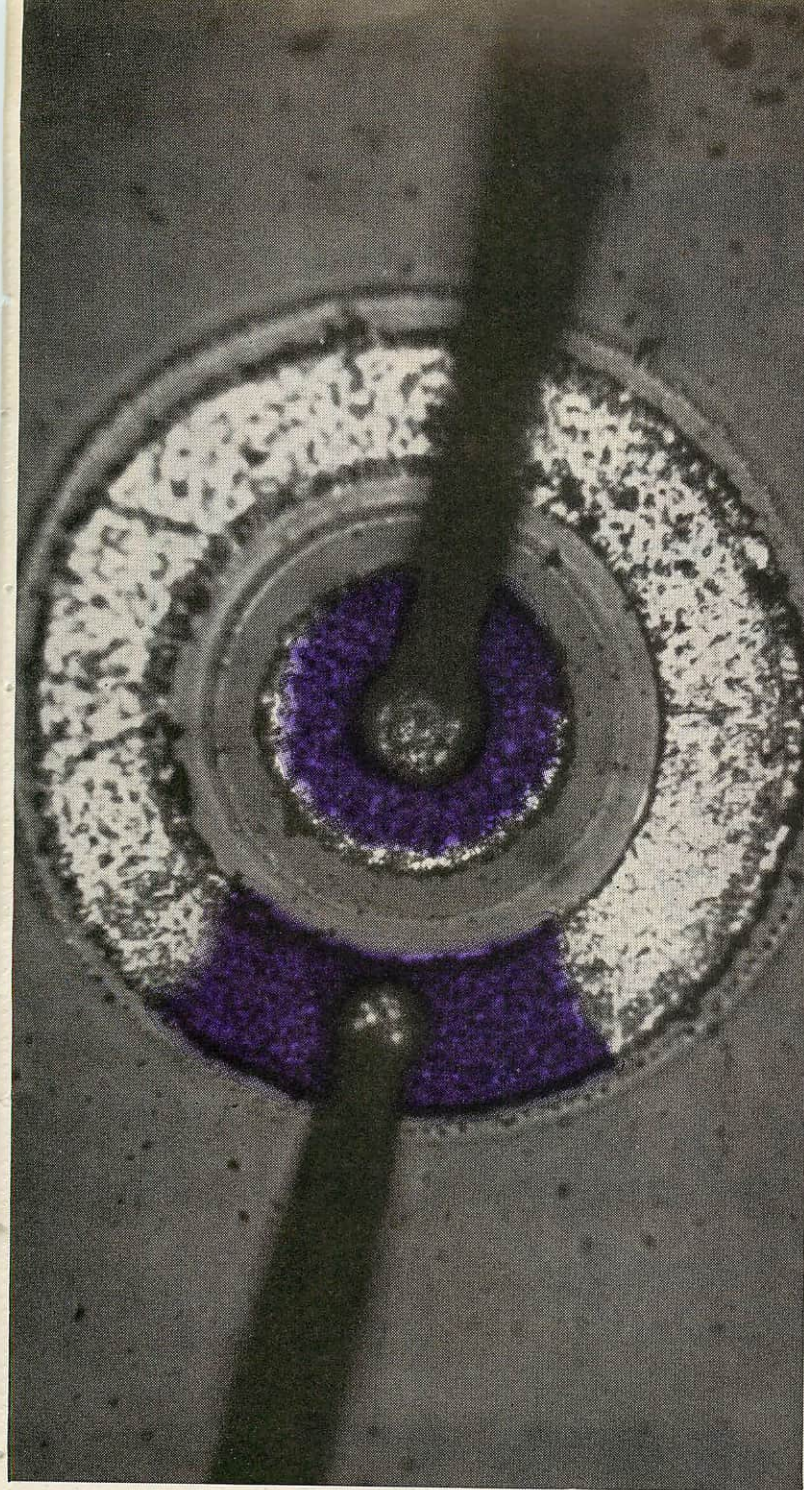

How Sylvania checked "purple plague" and boosted reliability

What you see above represents a victory over an insidious cause of semiconductor device failure—a problem faced by the whole industry—the "purple plague."

On the left, the blotches are a gold-aluminum-silicon alloy formed by reaction between the gold wires and aluminum base areas of the chip. Accelerated by high temperatures, this reaction increases se-

ries resistance and weakens the leads—bad news when reliability is essential.

Sylvania engineers departed from standard industry practice and developed a technique of bonding aluminum wires to aluminum, illustrated at the right. After long testing at worse-than-actual conditions, the clean Sylvania junctions confirm: no chemical reaction, no purple plague at

the chip—a big step forward that means greater system reliability.

All Sylvania epitaxial planar devices now benefit from this victory. The broad, integrated capabilities that made it possible are being applied constantly to the improvement of Sylvania semiconductors.

Semiconductor Division, Sylvania Electric Products Inc., Woburn, Massachusetts.

SYLVANIA

SUBSIDIARY OF

GENERAL TELEPHONE & ELECTRONICS



NEW CAPABILITIES IN: ELECTRONIC TUBES • SEMICONDUCTORS • MICROWAVE DEVICES • SPECIAL COMPONENTS • DISPLAY DEVICES



PD-135

NEW PHELPS DODGE ELECTRONIC ALLOY

PD-135 is Phelps Dodge's new copper base alloy with high conductivity, excellent ductility, and retention of high strength at elevated temperatures. Developed with an oxygen free copper base, PD-135 is controlled by Phelps Dodge throughout every step of casting, and fabrication into rod, bar, wire, and strip forms.

Heat-treatable PD-135 is particularly suited for applications requiring extensive cold working and upsetting.

PD-135 is completely free-flowing, and cold forms to truest tolerances. A heat-treatable alloy, PD-135 does not lose its high strength characteristics after exposure to high temperatures.

PD-135 is sold in minimum mill quantities of 500 lbs. per size. For complete information, including performance data, on this noteworthy new alloy, send for Brochure K. Just write Phelps Dodge at the address below.

PHELPS DODGE

ON READER-SERVICE CARD CIRCLE 475

COPPER PRODUCTS CORPORATION
300 Park Avenue, New York 22, N.Y.




ELECTRONIC DESIGN

Transistors and allied products have been included for your convenience in the Transistor Data Chart section of the magazine. The Reader-Service numbers for the products can be circled on either the Reader-Service card in the main section or the special one in the back of this Data Chart.

Paired Transistors

Experimental products

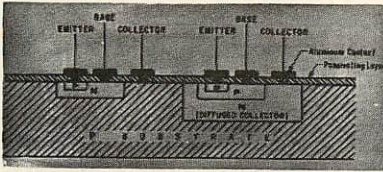

Saturation voltage for model XT999, a monolithic NPN and PNP pair, is 0.3 v for $I_C = 10$ ma and $I_B = 1$ ma. An FET pair, model X-600, provides gms of approximately 1000 μmhos and has a pinch-off voltage of 2-3 v.

P&A: \$84-\$95; 4 weeks.

Mfr: Signetics Corp.

ON READER-SERVICE CARD CIRCLE 500

Transistors

Silicon planar

Eighty-one types are manufactured in the Leaf configuration. Collector saturation voltage is 0.2 v at $I_C = 150$ ma dc, $I_B = 15$ ma dc. Beta linearity is $h_{FE} = 65$ at $I_C = 0.5$ amp dc and 30 at 1 amp dc.

Price: \$1.05-\$25.50 (100-999).

Mfr: Bendix Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 501

Silicon Transistors

Diffused mesa



High-collector voltages, low-saturation voltages, fast-switching speeds and relatively fast betas are claimed for types 2N389, 2N424, 2N1015, etc. Diffused-mesa construction is said to have improved a present line of 41 silicon power transistors.


Price: \$1.05-\$25.50 (100-999).

Mfr: Bendix Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 502

Photo-Transistors

High sensitivity

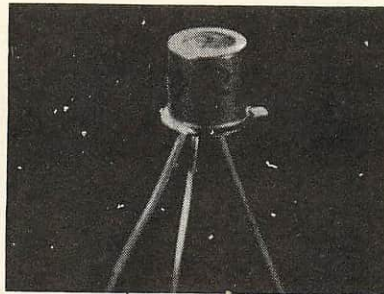

Sensitivity radiation system range is 50-200 $\mu\text{a/mw/cm}^2$ for type 2N2452. Sensitivity illumination system range is 2.6-10.3 $\mu\text{a/ft-c}$. Unit is designed as a companion to type 2N986.

P&A: \$27 (1-99); 4 weeks.

Mfr: Fairchild Semiconductor.

ON READER-SERVICE CARD CIRCLE 503

Power Transistors

150-w dissipation

A tight two-to-one h_{FE} ratio (50-100 at 3 amps) makes types 2N1539 through 2N1543 useful for power amplifier applications with critical stability requirements. The 150-w dissipation rating is said to be the highest available in the TO-3 diamond package.


P&A: \$2.10-\$10.40 (1-99); stock.

Mfr: Texas Instruments Inc., Semiconductor-Components Div.

ON READER-SERVICE CARD CIRCLE 504

Silicon Transistors

Interdigitated "I" geometry




Collector breakdown voltages of 75 v min and typical total switching time of < 90 nsec are available in types 2N2787-2N2792. Noise levels as low as 0.5 db are offered in types 2N929 and 2N930, which are available singly, or as duals and matched duals.

Mfr: General Instruments Corp.

ON READER-SERVICE CARD CIRCLE 505

FETs

Planar-diffused silicon

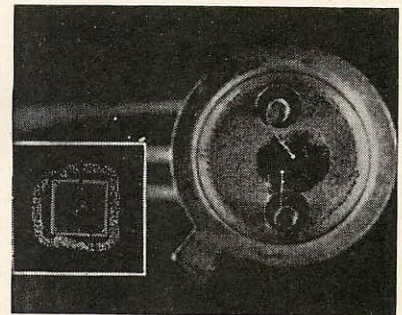

P-channel UNIFETs have two different geometries with a 1.1 to 1 ratio of g_m to I_{DSS} and 6 v max pinch-off voltage. Storage temperature range is -65 to $+200$ C. Maximum gate-drain breakdown voltage of 20 v is guaranteed at $I_G = 1 \mu\text{a}$.

Price: \$9.50-\$11.50 (over 100).

Mfr: Siliconix, Inc.

ON READER-SERVICE CARD CIRCLE 506

Silicon Transistor

Planar epitaxial


The 1.6 Gc type 2N2808 has an ac current gain of 5 at 200 Mc. It can be used as an rf amplifier to 500 Mc and as an oscillator to 1.6 Gc. Power gain is 20 db measured at 200 Mc; collector-to emitter voltage is 6 v, and collector current is 2 ma.

Mfr: Raytheon Co., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 507

Power Transistors

Breakdown voltage to 100 v

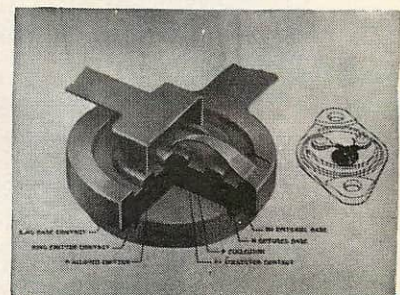


Fall time of types MP721A/B/C is 0.7 μsec at 8 amps collector current for TV flyback circuits. The epitaxial-base germanium units have a saturation voltage of 0.3 v, max, at 10 amps.

Mfr: Motorola Semiconductor, Inc.


ON READER-SERVICE CARD CIRCLE 508

Electronic Components
from Westinghouse



For your needs . one source

THE NEW CASE FOR RELIABILITY

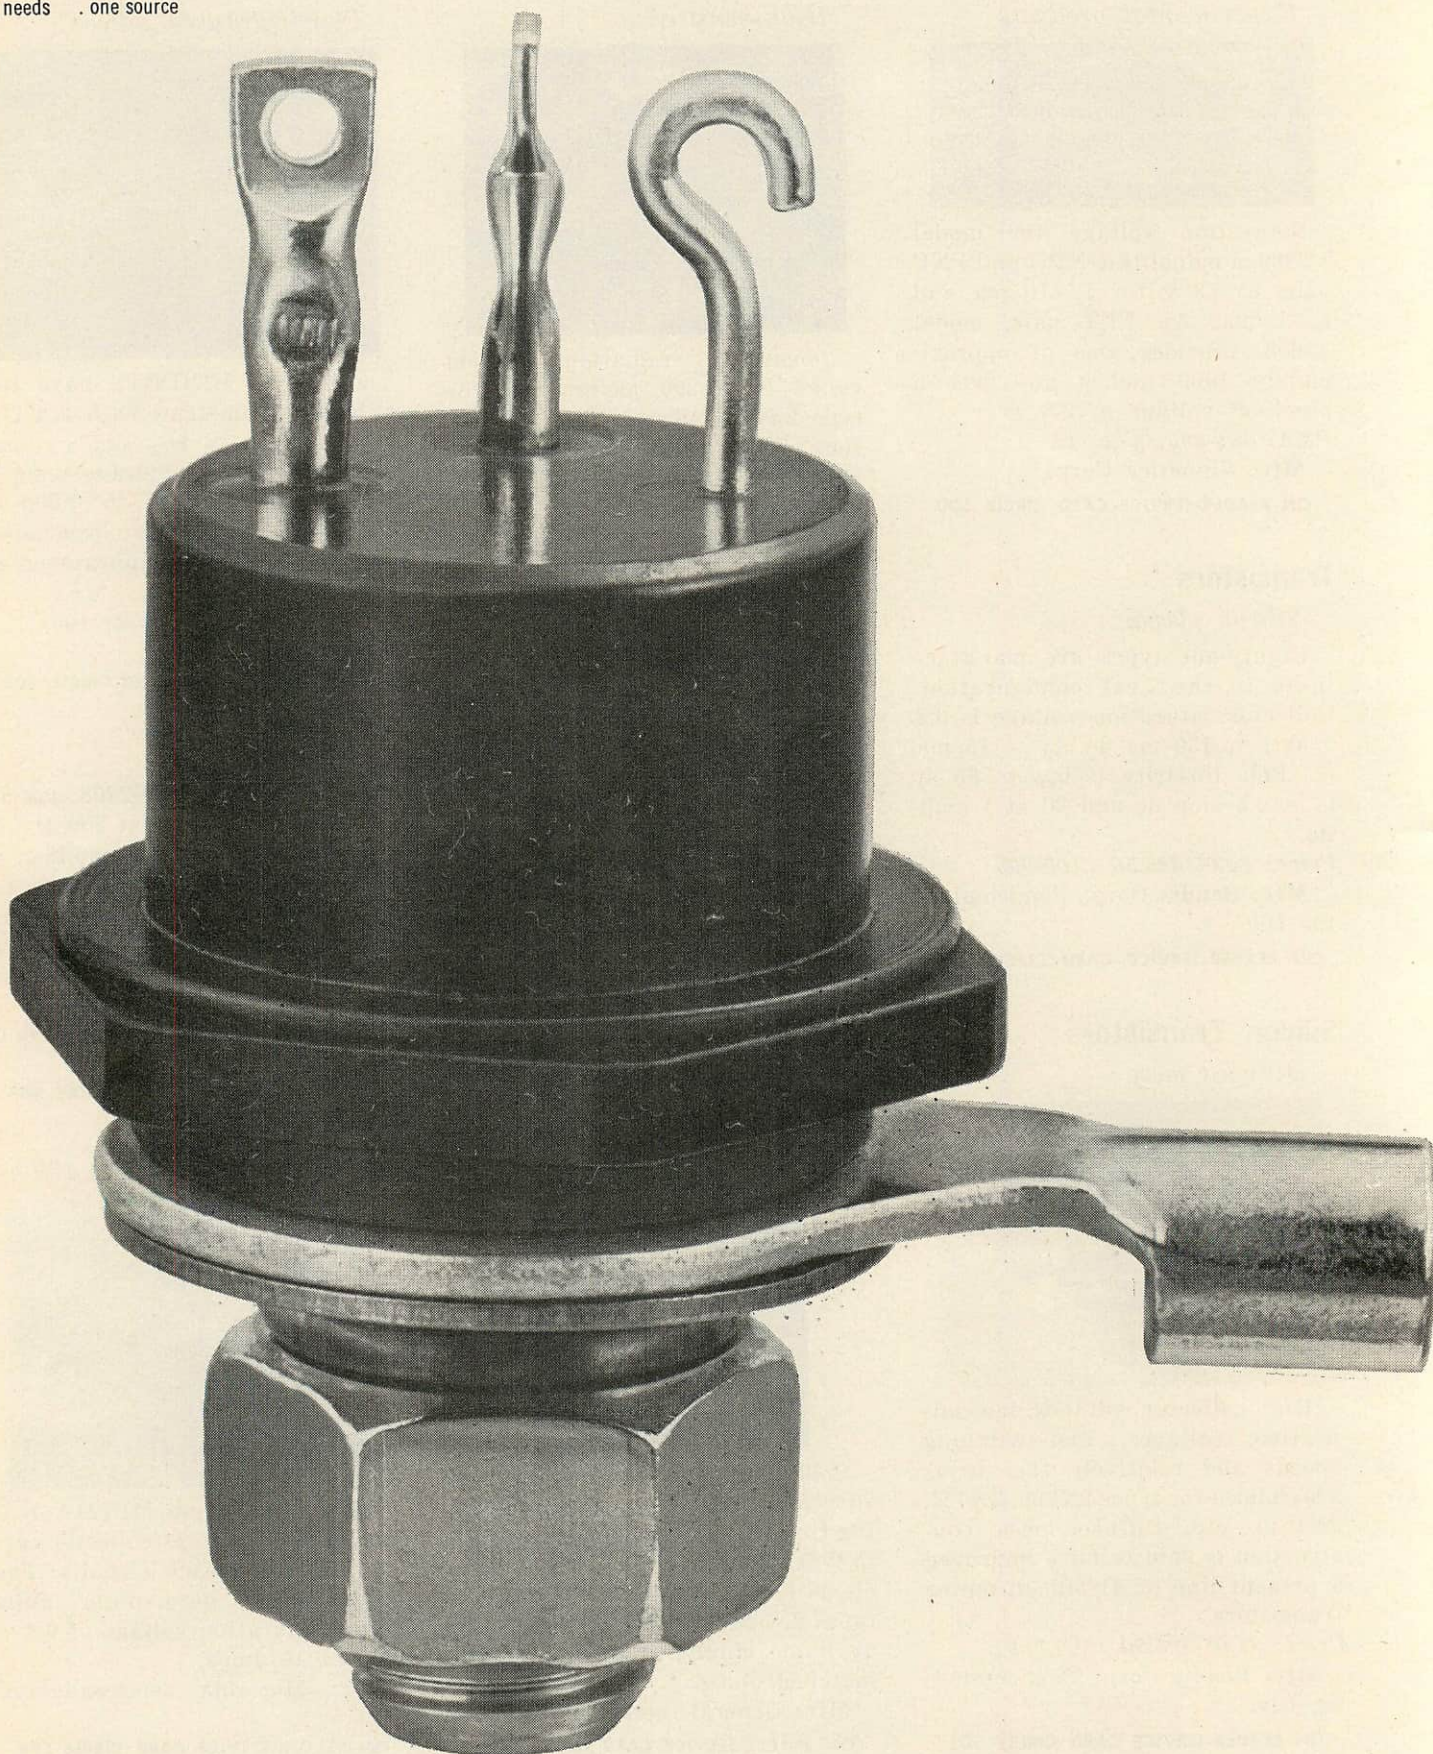

The industry's standard for silicon power transistors—now in a double ended case!

In response to customer demand, Westinghouse now makes available its field-proven silicon power transistor in a new double-ended case. Performance, reliability and construction features are the same as have been successfully used in Westinghouse military type transistors for the last three years. Over 5 megawatts of 30 ampere transistors are now serving in military and industrial applications.

The new double-ended transistor, 2N2757 series, comes in voltage ratings to 250 volts, current ratings to 30 amperes, and a variety of gain classes.



Rock top transistor for highest power ratings

The 250 watt, 300 volt 2N1809-2N2109 series in the rugged "rock top" case features the highest power dissipation ratings available in silicon transistors.



Conventional case for convenient mounting

The 2N2739-2N2754 series (formerly Type 109) offers the convenience of a low mounting profile. Dissipation ratings to 200 watts, currents to 20 amperes.

New procurement specifications

Procurement specifications on each of the above units are available in military format for designers and reliability engineers. These specifications outline electrical and environmental capabilities under standard Mil-spec conditions. Write for a free copy today on your company letterhead: Westinghouse Semiconductor Division, Youngwood, Pa. You can be sure... if it's Westinghouse. SC-1090

We never forget how much you rely on

Westinghouse

ON READER-SERVICE CARD CIRCLE 476

May 24, 1963

Power Transistors

Meet MIL-S-19500/102

Ratings of 150 w and 7.5 amp are available for these silicon devices. Type USN 2N1016Bm is rated at 100 v, and type USN 2N1016CM is rated at 150 v.

Guide: Insert bold-italic line


P&A: \$32.55-\$43.35 (100 or more).

Mfr: Westinghouse Electric Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 509

Transistor Tester

Pulse testing

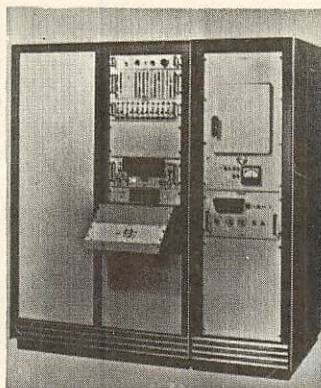

Test parameters up to 500 v and 25 amps are provided by the TACT unit. Pulse duration can be varied from 100-500 μ sec and 1-5 msec, and repetition rate from 2-100 pps. Test conditions are determined in a digital manner by prepunched cards.

Mfr: Texas Instruments Inc.

ON READER-SERVICE CARD CIRCLE 510

UHF Transistor

Low noise

Noise figure of the TA-2333 at 450 Mc is 4 db. Rf amplifier gain is 15 db, typical. Collector-to-base voltage is 30 v, min; collector-to-emitter, 20 v, min; total dissipation at 25 C free air, 200 mw.

P&A: \$35 (1-99); stock.

Mfr: Radio Corp. of America.

ON READER-SERVICE CARD CIRCLE 511

Power Transistors

Vhf units

Power outputs up to 5 w at 200 Mc are provided by the 70 and 140 v series 100. In the 200 series, model SN230 features power outputs of 5 w at 130 Mc, and model SN231 features 10 w at 130 Mc.

Price: \$95-\$145 (1-49).

Mfr: National Semiconductor Corp.

ON READER-SERVICE CARD CIRCLE 512

Silicon Transistors

90-nsec switching


Interdigitated "I" geometry is featured in these diffused-silicon devices. Types 2N2787-89 are available in the TO-5 case, and types 2N2790-92 are available in the TO-18 case. Collector breakdown voltages are specified at 75 v min; collector-to-emitter ratings exceed 35 v. Typical frequencies exceed 300 Mc.

Mfr: General Instruments Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 513

Heat Sink

Printed-circuit board



Natural convection unit is said to provide the maximum ratio of heat dissipation to volume occupied. It is claimed that the model 2704 substantially increases transistor performance by optimizing the effect of heat transfer coefficient available in free convection. Both the TO-5 and TO-9 transistor cases can be accommodated.

Mfr: Astro Dynamics, Inc.

ON READER-SERVICE CARD CIRCLE 514

Switching Transistors

25-amp

Diffused alloy power types 2N2636-38 switch clamped inductive loads in microseconds at peak powers of 100, 1500 and 2000 w. Switching times range from 1-5 μ sec. Units can switch 25 amps at collector-emitter voltages of 40, 60 and 80 v.

P&A: \$26.25-\$38.25; stock.

Mfr: Bendix Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 515

Silicon Transistors

Medium-power vhf

Power output is 3.2 w, min, at 125 Mc. Types 2N2781, 2N2782 and 2N2783 can be used as drivers to reactive multiplier chains to achieve up to 2-1/2 w power in the Kc range.

P&A: \$39.90-\$75; stock.

Mfr: TRW Electronics.

ON READER-SERVICE CARD CIRCLE 516

one call

does it all!

ALgonquin 4-9000

(BOSTON)



SEMICONDUCTORS

- MICROCOMPONENTS
- TUNNEL DIODES
- SILICON RECTIFIERS
- TRANSISTORS

AUTHORIZED RCA DISTRIBUTOR


DeMambro

1095 COMMONWEALTH AVE., BOSTON
WORCESTER • SPRINGFIELD • PROVIDENCE, R.I. • MANCHESTER, N.H.

ON READER-SERVICE CARD CIRCLE 477

Transistor Holder

Teflon insulated

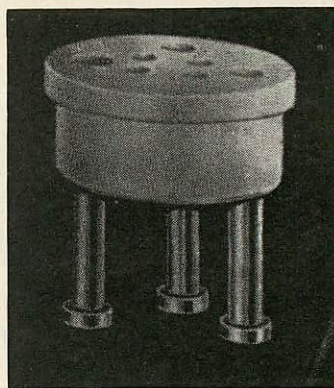

The component is mounted on the shoulder of the Teflon bushing in model RTC-304T. It has a major diameter of 0.325 in. and a minor diameter of 0.290 in. Three through-hole lugs are provided on a 0.200 in. pitch circle for TO-5 type JETEC headers.

Mfr: Sealelectro Corp.

ON READER-SERVICE CARD CIRCLE 517

Voltage Tester

3 μ sec current duration


The time factor of the test, rather than the amount of current applied, is limited by model 1901A voltage breakdown tester. The duration of current avalanche through the test specimen is limited to 3 μ sec. Selector switches on the front panel determine the range (1 or 4 Kv) and the amount of ohmic current flow (10 μ a, 100 μ a or 1 ma).

Mfr: Microdot, Inc.

ON READER-SERVICE CARD CIRCLE 518

Transistor Heat Sink

TO-5 and TO-9 packages

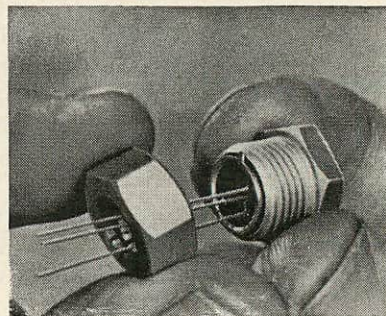


Conduction-cooled 1103 series is available in three finishes: uninsulated, electrically insulated and black anodized. Threaded two-piece construction tightens to grip both sides of transistor weld flange.

Mfr: Thermalloy Co.

ON READER-SERVICE CARD CIRCLE 519

SPRAGUE LOGIC TRANSISTORS GIVE SUPERIOR LATCH-UP PROTECTION!

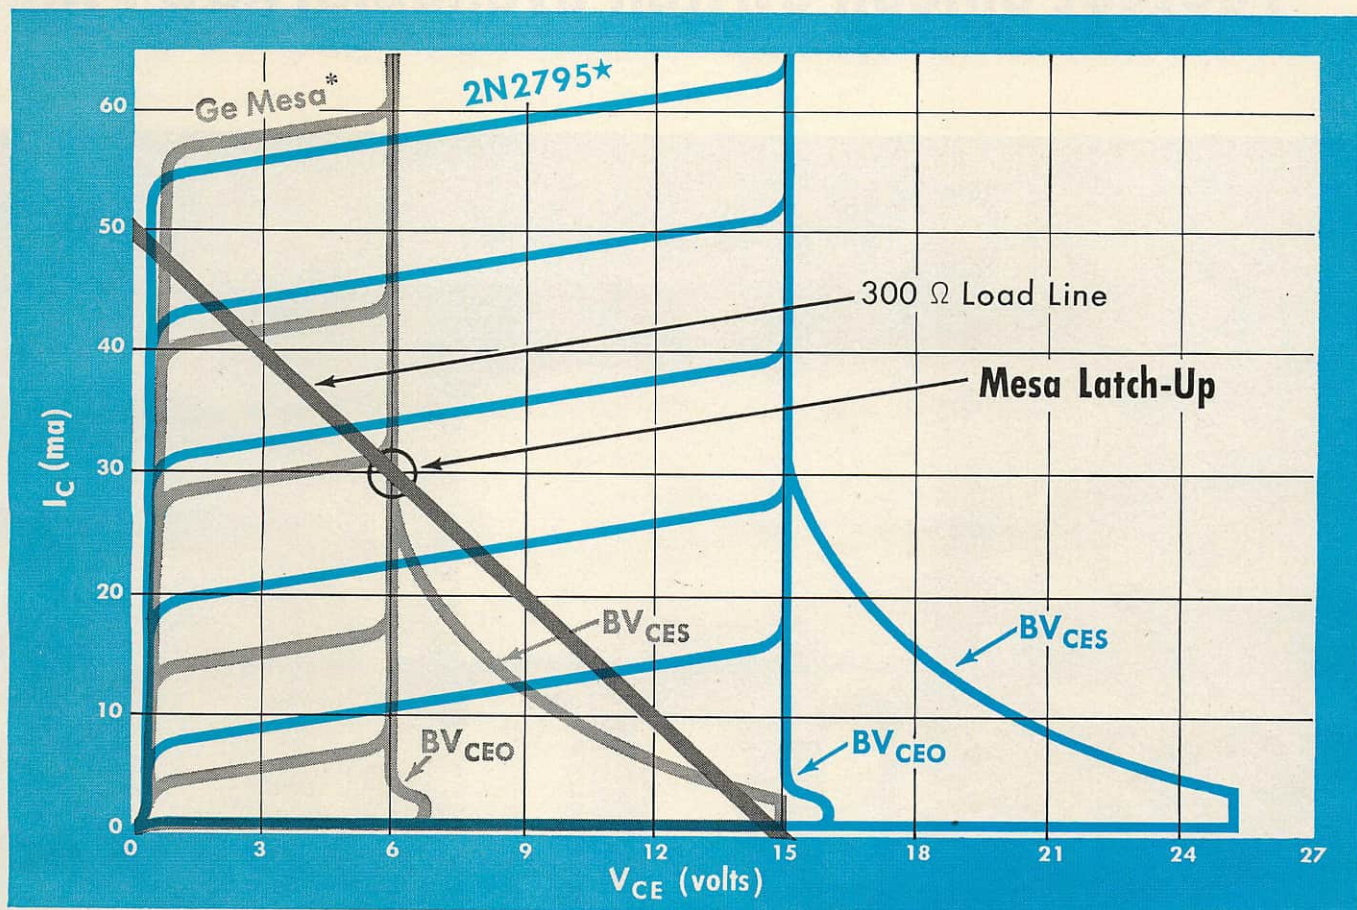

*ratings for most prime germanium mesa types.

★based on guaranteed ratings†

**For Guaranteed High Voltage Operation at High Speeds,
Investigate Sprague ECDC® and MADT® Transistors**

Type No.	f_T (typical)	BV_{CES} (minimum)	BV_{CEO} (minimum)
2N2795	450 mc	25 volts	15 volts
2N2796	450 mc	20 volts	12 volts
2N984	350 mc	15 volts	10 volts
2N979	150 mc	20 volts	15 volts
2N980	150 mc	20 volts	12 volts
2N2048†	250 mc	20 volts	15 volts

(†TO-9 Case)

● For additional information on Sprague High Voltage Logic Transistors, write to the Technical Literature Service, Sprague Electric Company, 347 Marshall Street, North Adams, Massachusetts.

© Trademark, Philco Corp.

SPRAGUE COMPONENTS

TRANSISTORS
CAPACITORS
MAGNETIC COMPONENTS
RESISTORS
MICROCIRCUITS

INTERFERENCE FILTERS
PULSE TRANSFORMERS
PIEZOELECTRIC CERAMICS
PULSE-FORMING NETWORKS
TOROIDAL INDUCTORS

HIGH TEMPERATURE MAGNET WIRE
CERAMIC-BASE PRINTED NETWORKS
PACKAGED COMPONENT ASSEMBLIES
FUNCTIONAL DIGITAL CIRCUITS
ELECTRO WAVE FILTERS




'Sprague' and '©' are registered trademarks of the Sprague Electric Co.

May 24, 1963

ON READER-SERVICE CARD CIRCLE 478

T97




This is the micropower transistor—a new silicon epitaxial planar device that offers higher efficiency at microwatts or milliwatts. As a switch, or as an amplifier, the type 2N2784 offers capabilities beyond any now available! Typical: 1 KMC bandwidth—higher beta level at

microamperes, with reduced falloff beyond 10 milliamperes.

This performance stems from advanced device design and refined photolithographic techniques plus Sylvania's exclusive skills in epitaxial technology. Unusually small

Fastest silicon switch available: new 1 KMC

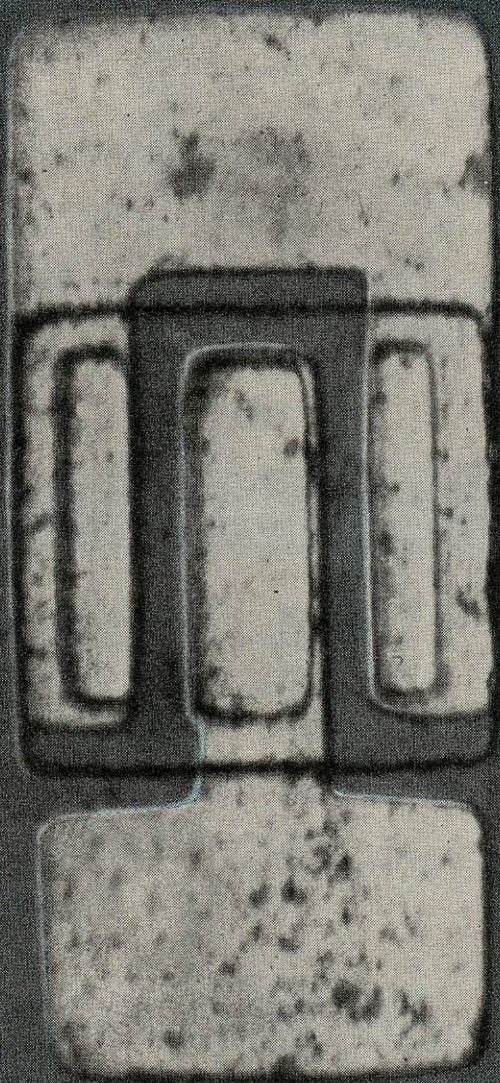

Epitaxial construction, new 3-stripe configuration, and small size, produce new high switching speed ($T_{on} + T_{off} = 12$ nanoseconds) with low saturation voltages (typically 0.2 volts).

junction sizes and spacings, low capacitances, result in improved frequency response for both switching and amplifier applications.

The Sylvania 2N2784 and the 2N709 and 2N709A, which are members of the 2N2784 family, are all avail-



able in your choice of three packages—the TO-18, TO-46 "pancake," and the new TO-51 co-planar package.

For more information, see your Sylvania salesman or write to Semiconductor Division, Sylvania Electric Products Inc., Woburn, Mass.

Sylvania epitaxial planar transistor 2N2784

ON READER-SERVICE CARD CIRCLE 479

SYMBOL	CHARACTERISTICS	2N2784		2N709		2N709A		TEST CONDITIONS	
		Min	Max	Min	Max	Min	Max		
h_{FE}	DC Current Gain	40	120	20	120	30	90	$I_C=10mA$	$V_{CE}=0.5V$
h_{FE}	DC Current Gain	20		15		15		$I_C=30mA$	$V_{CE}=1.0V$
$h_{FE} (-55^\circ C)$	DC Current Gain	10		10		10		$I_C=10mA$	$V_{CE}=0.5V$
$V_{BE} (sat)$	Base Saturation Voltage	.70	.85 V	.70	.85 V	.70	.85 V	$I_C=3.0mA$	$I_B=0.15mA$
$V_{CE} (sat)$	Collector Saturation Voltage		.26 V		.30 V		.30 V	$I_C=3.0mA$	$I_B=0.15mA$
C_{ob}	Output Capacitance		3.0 pf		3.0 pf		3.0 pf	$I_E=0$	$V_{CB}=5.0V$
C_{TE}	Emitter Transition Capacitance		2.0 pf		2.0 pf		2.0 pf	$I_C=0$	$V_{EB}=0.5V$
I_{CBO}	Collector Cutoff Current		5m μ A		50m μ A		5m μ A	$I_E=0$	$V_{CB}=5.0V$
$I_{CBO} (150^\circ C)$	Collector Cutoff Current		5.0 μ A		5.0 μ A		5.0 μ A	$I_E=0$	$V_{CB}=5.0V$
BV_{CBO}	Collector to Base Break-down Voltage	15	V	15	V	15	V	$I_C=10\mu A$	$I_E=0$
$V_{CEO} (sust)$	Collector to Emitter Sustaining Voltage	6.0	V	6.0	V	6.0	V	$I_C=10mA$	$I_B=0$
BV_{EBO}	Emitter to Base Break-down Voltage	4.0	V	4.0	V	4.0	V	$I_C=0$	$I_E=10\mu A$
T_s	Charge Storage Time Constant		5.0 ns		6.0 ns		6.0 ns	$I_C=I_{B1}=I_{B2}=5.0mA$	
$t_d + t_r$	Turn-on Time ($V_{BE(0)}=-1.0V$)		9 ns		15 ns		15 ns	$I_C=10mA$	$I_{B1}=2mA$
$t_s + t_f$	Turn-off Time		9 ns		15 ns		15 ns	$I_C=10mA$	$I_{B1}=I_{B2}=1.0mA$
f_T	Gain-Bandwidth Product	1000	mc	600	mc	800	mc	$I_C=5.0mA$	$V_{CE}=4.0V$

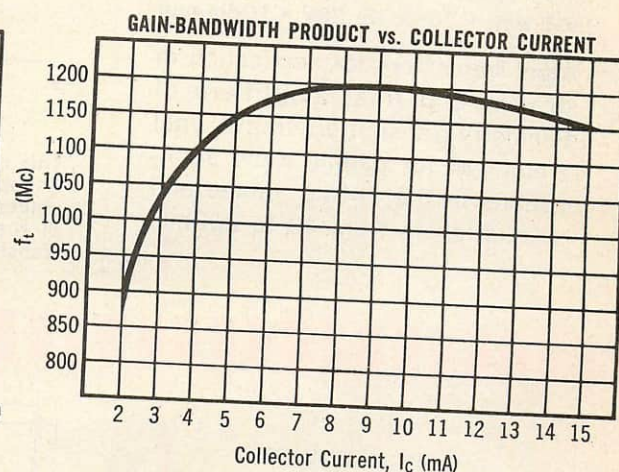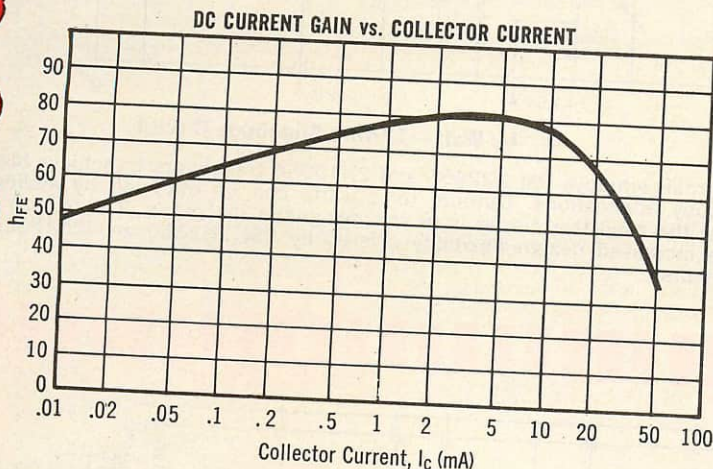

SYLVANIA

SUBSIDIARY OF
GENERAL TELEPHONE & ELECTRONICS



NEW CAPABILITIES IN: ELECTRONIC TUBES • SEMICONDUCTORS
MICROWAVE DEVICES • SPECIAL COMPONENTS • DISPLAY DEVICES

**TRW
Electronics**



PSI


How to design transistorized communications equipment

**MEDIUM POWER
VHF TRANSISTORS**

2N1506A

• 1 watt • 70mc @ 28V • 10db gain

Ideal transistors for application in drivers and final amplifiers of telemetry transmitters to 2W, final amplifiers for mobile radio applications in the 140mc range, and as multipliers from 40 to 200mc.

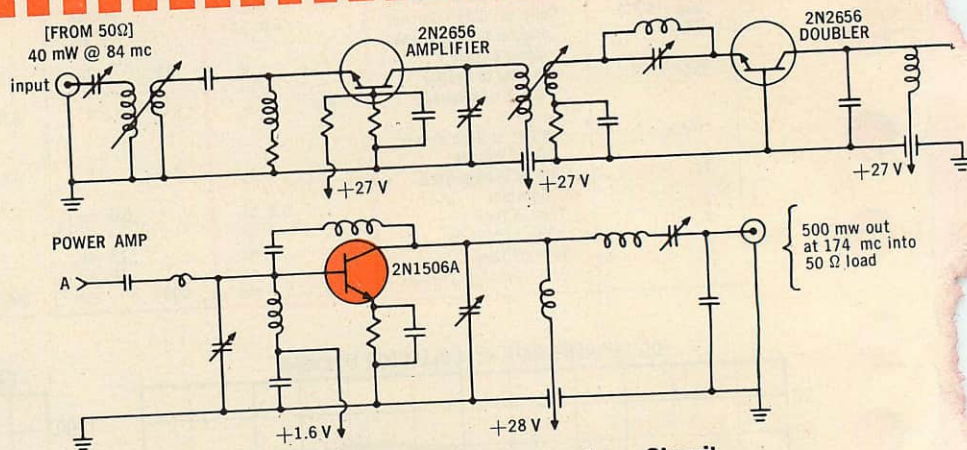

1/2 Watt - 174mc Sonobuoy Circuit


This circuit employs PSI 2N2656 and 2N1506A transistors to achieve high power for Sonobuoy applications. Outputs to 2 watts can be obtained by adding additional stages; the oscillator circuit is at the designer's discretion. This circuit is indicative of the increased design flexibility offered by PSI 2N2656 and 2N1506A silicon RF transistors.

**HIGH POWER
VHF TRANSISTORS**

2N2781

• 5 watts • 30mc @ 28V • 12db gain

Use this series as final amplifiers in communications equipment, 2 to 5W telemetry equipment and mobile radio designs.

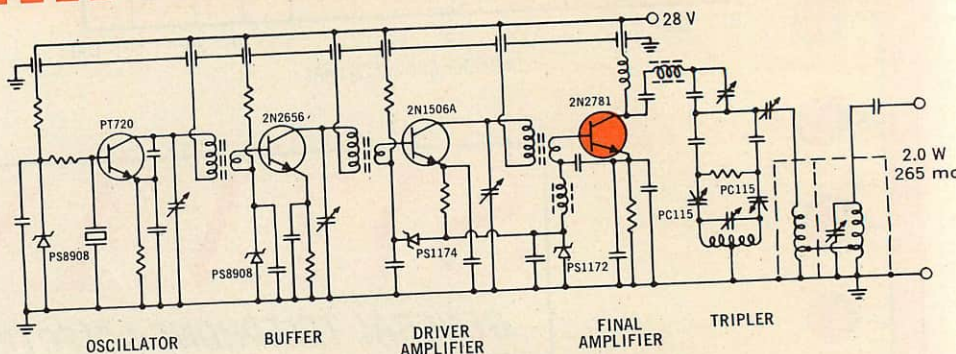

2 Watt - 265mc Telemetry Circuit

Originally designed and engineered at PSI, this circuit applies a PSI PT720 as an oscillator, 2N2656 as a buffer, 2N1506A for the driver stage and a 2N2781 for the final, to deliver a conservative 2 watts at 265mc. This application is one of the first telemetry designs available using low cost, off-the-shelf units instead of state-of-the-art devices.

New PSI RF transistor application notes and bulletins:

- Summary of the State of the Art in the practical use of Communications Transistors
- Citizens Band Transmitter
- VHF Transistor Oscillator
- Radio Frequency Applications, Types PT900 and 2N1900
- 50W, 30mc Amplifier
- Class C—100 Watt—20 Megacycle Power Amplifier
- Class C—100 Watt—10 Megacycle Power Amplifier
- Class C—100 Watt—3 Megacycle Power Amplifier
- 1W, 1Kmc Transmitter
- 240mc PCM Transmitter
- 5W, 30mc Power Gain Test Circuit
- Inverter Design
- Switching Application, Types PT900, 2N1899, 2N1901
- Pulse Driver for Inductive Elements and Magnetic Memories, Types PT900, 2N1899, 2N1901
- 3W, 125mc Amplifier
- $\frac{1}{2}$ W Citizens Band Transmitter
- 100W, 100mc Amplifier
- 5W, 70mc Amplifier
- 10W, 100mc Oscillator

Free...

NEW RF TRANSISTOR APPLICATION LITERATURE

... Application ENGINEERING Assistance!

It is now possible to design all solid state communications equipment at costs comparable to, or below, vacuum designs . . . this new PSI application literature will help show you how! If you don't find literature listed on the back of this card covering your specific field of interest, contact your nearest PSI sales office and discuss your specific communications equipment design problem with one of our sales engineers. Let our experienced application engineering section show you the reliability, economy, equipment size reductions and ruggedness you can obtain when you **SPECIFY PSI** for all your RF transistor needs.

(If the postal return card has been removed from your copy of this publication, write on your company letterhead. The application literature listing has been repeated on the back of this card for your convenience.

PSI SERVES THE COMPLETE COMMUNICATIONS SPECTRUM . . . From low-level, low-noise oscillators and amplifiers to advanced high-power, high-frequency devices, PSI has the communications transistor your designs require.

For the past five years, PSI has dedicated the major part of its transistor development and engineering efforts towards optimizing capabilities of silicon transistors in all communications equipment. Today PSI is a leading producer of RF transistors for high reliability space communications equipment in such projects as Mariner, OAO, Ranger, Relay, and Explorer. Realizing that component cost is a major factor in communications equipment design, PSI has had, as an early objective, the pricing of high performance RF devices at levels which will hasten the era of all-transistorized communications systems in many new fields.

Call PSI today to discuss your particular communications equipment design problems. Let PSI application engineering show you how you can design transistorized communications equipment on a vacuum tube budget through lower overall component costs due to lower voltage operation, lack of heater equipment, smaller power supplies, and greater efficiencies.


on a vacuum tube budget!

HIGH POWER HF TRANSISTORS

2N1900

- 100 watts • 10mc @ 60V
- 10db gain

The PSI 2N1900 series is ideal for commercial, marine, and military PRC and VRC designs from 2 to 12mc, as 10 amp switchers in power conversion applications, and amplifiers in VLF transmitters up to 5KW.

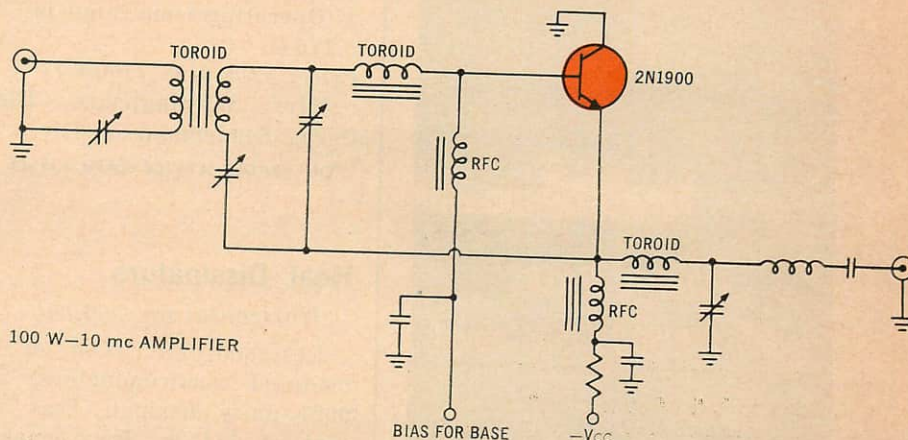

100 W-10 mc AMPLIFIER

100 Watt—10mc Amplifier for PRC, VRC and Marine Radio

This economical design employs optimum heat sinking to provide a substantial reduction in size over 100 watt tube amplifiers. This design employs a PSI 2N1900 in a **reliable**, cold-welded package to deliver 100 watts out at 10mc with greater than 10db gain.

LOW POWER/LOW NOISE UHF TRANSISTORS

2N2656

- 50mW • 100mc @ 10V
- 10db gain

Apply these low noise figure units to your oscillator designs up to 50mW. These transistors also provide optimum performance in low to medium-level class A and B buffer amplifiers by delivering up to 200mW RF power with over 50% efficiency.



Pacific Semiconductors, Inc.
TRW Electronics
THOMPSON RAMO WOOLDRIDGE INC.

14520 AVIATION BLVD., LAWDALE, CALIF. • OS 9-4561, OR 8-0561
TWX: 213 647-5113 • Cable Address: PSISOCAL

ON READER-SERVICE CARD CIRCLE 480

a MIL-TYPE first from DICKSON

9 VOLT TC ZENERS to MIL-S-19500 / 156A(Navy)

Dickson is the first to offer 9 volt, 500 mw, silicon diffused-junction temperature compensated zener reference diodes to meet the requirements of MIL-S-19500/156A (Navy). USN Types 1N935B, 1N937B, 1N938B, and 1N939B offer temperature coefficients of .01, .002, .001, and .0005%°C. Modest quantities are immediately available for your critical military applications.

Dickson also offers the industry's broadest line of standard temperature compensated zener reference diodes. The following types are presently available from stock, to JEDEC specifications:

1N429	1N1530-30A	1N2765-70A
1N821-27A	1N1735-42A	1N3154-57A
1N935-39B	1N2163-71A	1N3580-84B
1N941-45B	1N2620-24B	1N4057-85A

For complete information contact your authorized Dickson Representative, or write, wire or phone Mr. Jack Nancarrow, Dickson Electronics, P. O. Box 1387, Scottsdale, Arizona. Phone code 602, 946-5357.



DICKSON
ELECTRONICS CORPORATION

248 Wells Fargo Avenue, Scottsdale, Ariz.

ON READER-SERVICE CARD CIRCLE 481


Transistor Package

Integral beryllia base

Packages of 5/8 in. and 3/4 in. diam, for devices in the 12-20 amp range, with two, three or four leads are included in this line. Glass-to-metal seals are said to be eliminated by the package, whose lower beryllia surface provides a direct path from the semiconductor material to a chassis or heat sink.

Mfr: National Beryllia Corp.

ON READER-SERVICE CARD CIRCLE 520

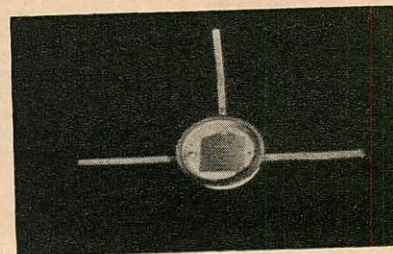

Silicon Transistors


6000 w peak

NPN silicon power units have voltage ratings of 50-200 v. Typical saturation resistance of series 2N1830 and 2N2130 is 0.035 ohms. Minute gain is 10 at 25 amps collector current. Dissipation is 250 w; peak power capability is 6000 w. Operating temp range is -65 to +175 C.

Price: \$105-\$198 (100+).

Mfr: Westinghouse Electric Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 521

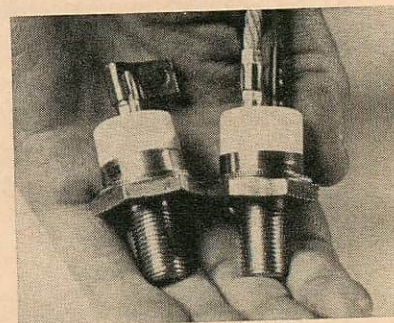

Heat Dissipators


Horizontal or vertical

Designed for TO-8 or stud-mounted semiconductors, Series 9021 units dissipate heat at the rate of 6 C/w. They employ an extruded parallel fin design and may be used in either a vertical or horizontal position.

P&A: \$0.50-\$0.95; stock.

Mfr: Augat Inc.

ON READER-SERVICE CARD CIRCLE 522

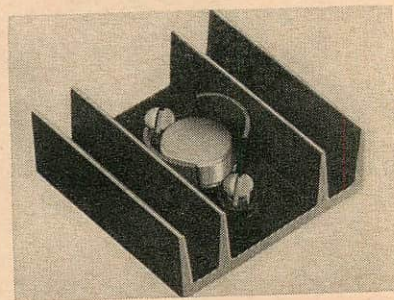


Transistor Holder

Teflon-insulated

Providing 4 connections on a 0.200-in. diam pitch circle, the RTC-400T-L2 features lugs extending 0.070 in. below the Teflon body for circuitry connections. The major diameter is 0.325 in. and the minor diameter is 0.290 in. Over-all socket height is 0.225 in. and unit may be used on chassis thicknesses up to 0.093 in.

Mfr: Sealelectro Corp.

ON READER-SERVICE CARD CIRCLE 523

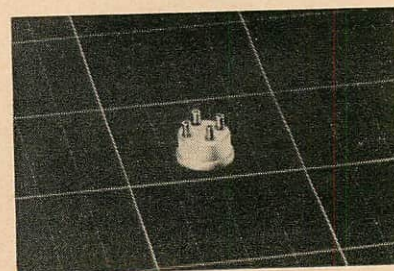

ELECTRONIC DESIGN

Transistors

Power switching

Switching up to 1200 w in μ secs is afforded by these 10-amp, diffused alloy, power transistors. They feature a high cutoff frequency, $f_{ab} = 1.5$ Mc; and low saturation voltage, $V_{ces} = -0.5$ v dc, max at $I_c = 5$ amp, $I_B = -0.5$ amp. Series 2N2288-2290 are germanium pnp type units.

Mfr: Bendix Semiconductor.

ON READER-SERVICE CARD CIRCLE 524

Industrial Transistor

Mesa construction

Germanium epitaxial type TIX-316 has an h_{fe} of 35 min at 1 Kc, h_{fe} of 4.0 at 100 Mc; $R_b'C_c$ is 15 psec, max; C_{ob} is 3.0 pf, max; and NF is 4.5 db max at 200 Mc.

The device is packaged in a four-lead TO-18 case.

P&A: \$2.93; 3 weeks.

Mfr: Texas Instruments Inc., Semiconductor-Components Div.

ON READER-SERVICE CARD CIRCLE 525

Transistors

Silicon unijunction

Useful in oscillators and timing circuits, types 2N2646 and 2N2647 feature maximum peak point emitter current of 25 μ a (inter-base voltage = 25 v) and maximum valley point current of 18 ma (inter-base voltage = 20 v, $R_{B2} = 100$ ohms) at 25 C.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 526

Germanium Transistors

Diffused-alloy

PNP types 2N2285 through 2N2287 feature collector-emitter breakdown voltages of -30 to -80 v dc, min. Saturation voltage ($V_{CE(s)}$) is -0.65 v dc, max. Units are capable of switching up to 1600 w in 1-5 μ sec.


Mfr: Bendix Corp., Semiconductor Div.

ON READER-SERVICE CARD CIRCLE 527

NEW 1N4057-85A TC ZENERS FOR HIGH VOLTAGE APPLICATIONS

12.4 to 200 volt
temperature
compensated zeners
immediately available from

DICKSON

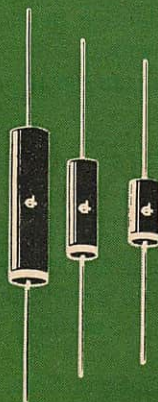

TYPES 1N4057
THRU 1N4085A

Zener Voltages:
12.4 to 200 v

Temperature
Coefficients:
.005%/°C standard
.002%/°C standard
.001%/°C to order

Voltage Tolerances:
5% standard
1% to order

Temperature Range:
-55 to +100°C

Dickson also supplies
1N1735-42A and
1N2765-70A series for
existing designs.

This Dickson TC zener series, the broadest ever developed for high voltage circuits, represents an ideal combination of performance, size, stability, and reliability. The rugged DURAPAK® high temperature, vacuum-molded package, exclusive with Dickson, provides a hermetic seal of the highest quality. Units meet or exceed environmental requirements of MIL-S-19500 and have passed 1000 hour storage life-tests at temperatures of 150°C.

Economical, too! Lower voltage units cost about 40% less than conventional devices. Higher voltage units offer substantial savings over small devices used "in series".

They are available from your nearby Dickson distributor. Call him, today, for immediate delivery.

FOR COMPLETE TECHNICAL INFORMATION, write: Mr. Frank Malley, Dickson Electronics, P.O. Box 1387, Scottsdale, Arizona.


*trademark of Dickson Electronics Corp.



DICKSON
ELECTRONICS CORPORATION

248 Wells Fargo Avenue, Scottsdale, Ariz.

ON READER-SERVICE CARD CIRCLE 482

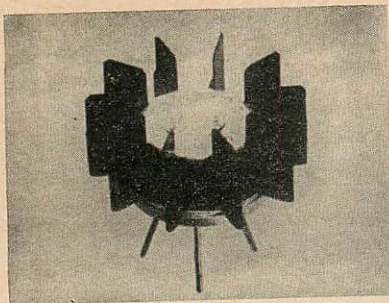


Transistor Heat Sink

Beryllium copper

For use with the TO-8 transistor, models 211, 213 and 215 feature a featherweight cooler which is said to provide rigid contact of large areas. Special tapered installation tools are available.

Mfr: Wakefield Engineering, Inc.

ON READER-SERVICE CARD CIRCLE 528

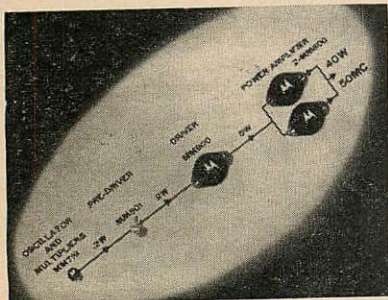


Silicon Transistors

High-power vhf

Two 50-Mc power devices, types MM800 and MM799, have a guaranteed power gain of 7 db at 15 w output. Model MM801 is a medium power amplifier/driver with a power gain of 10 db for a 3.5 w power output at 50 Mc.

Mfr: Motorola Semiconductor Products, Inc.

ON READER-SERVICE CARD CIRCLE 529

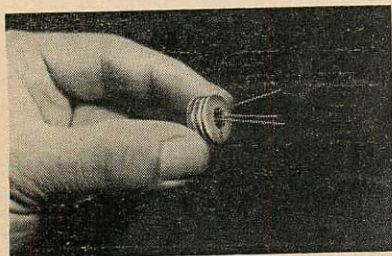

Transistor Heat Sink

Convection cooled

Model 2211 dissipates approx 1 w at 150 C. It fits all TO-5 and TO-9 cases, regardless of case diameter. Dimensions are 5/8 in. in diameter by 5/16 in. high; total weight is 0.056 oz.


Price: \$0.18 ea (+100), \$0.10 ea (+1000).

Mfr: Thermalloy Co.

ON READER-SERVICE CARD CIRCLE 530

Digital Modules

Operate to 120 C

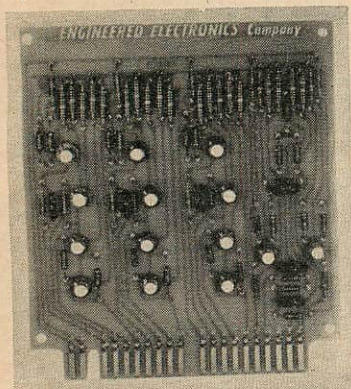

Nine basic circuit cards are offered in 1 and 10 Mc versions. Power required is ± 12 v dc. Logic levels are 0 and 6 v dc. Card dimensions are 4-1/4 x 5 x 1/16 in.

Mfr: Engineered Electronics.

ON READER-SERVICE CARD CIRCLE 531

Planar Transistors

15-pf collector capacitance

A minimum current transfer ratio of up to 3 is available with types 2N910-912 and 2N1973-74. The series is designed for use in high frequency amplifier circuits.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 532

Silicon Transistors

Npn planar

Minimum current transfer ratio of types 2N1189 and 2N1890 is up to 3.0 at 25 C. Units are designed for high frequency amplifier and oscillator circuits.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 533

Transistors

Planar passivated

TO-5 size differential amplifiers, types 2N2480/80A offer maximum voltage differentials of 5-10 mv. At 25 C, the collector-to-emitter voltage is 5 v and the collector currents are 100 μ a and 1 ma.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 534

Chopper Transistors

Double-emitter types

Breakdown voltage of types 3N74 through 3N79 is $BV_{E1E2} \pm 18$ v min at $I_E \pm 10 \mu$ a). Emitter currents are as low as 2 na at ± 15 v and offset voltages are $\pm 50 \mu$ v for specified conditions with temperatures from -25 to +100 C.

Mfr: Texas Instruments Inc., Semiconductor-Components Div.

ON READER-SERVICE CARD CIRCLE 535

Kovar Tab Transistor

Npn silicon planar

Maximum collector leakage current for types 11B554-556 is 25 μ a at 25 C. Units are silicon planar versions of TO-5 types 2N1613, 2N1711 and 2N1893.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 536

Silicon Transistor

High frequency

Interdigitated epitaxial planar device, type 2N2865, has a neutralized power gain of 18 db; oscillator output is 55 Mw at 500 Mc. Specifications include an NF of 4.5 db max at 200 Mc and an R_p' , C_c of 15 psec max.

Mfr: Texas Instruments Inc., Semiconductor-Components Div.

ON READER-SERVICE CARD CIRCLE 537

Chopper Transistors

Five-terminal devices

Planar epitaxial passivated types 2N2356/56A feature a collector leakage and emitter leakage current of 10 μ a, max. At 25 C, either collector-to-base voltage is 25 v.

Mfr: General Electric Semiconductor Products Dept.

ON READER-SERVICE CARD CIRCLE 538

ELECTRONIC DESIGN's TRANSISTOR READER - SERVICE CARD

Reprints Available

Electronic Design's Eleventh Annual Transistor Data Chart (1963)	549
"Designing A Bootstrap Emitter-Follower Amplifier"	546
"Generating Linear Waveforms With Field Effect Transistors"	547
"Four Ways to Pair Field-Effect With Conventional Transistors"	548

Manufacturers' Specification Sheets and Application Notes

Amelco	400	Fairchild	408	National	416	Solid State Products	425
AMF-Leland	401	General Electric	409	PSI	417	Sperry	426
Amperex	402	General Instrument	410	Philco	418	Sprague	427
Bendix	403	Honeywell	411	RCA	419	Sylvania	428
Clark	404	Hughes	412	Raytheon	421	Texas Instruments	429
Clevite	405	Industro	413	Silicon Transistor	422	Transitron	430
Crystalonics	406	Kearfott	414	Siliconix	423	Tung-Sol	431
Delco	407	Motorola	415	Solid State Electronics	424	Westinghouse	433

Transistor and Allied Product Information

434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451
452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469
470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487
488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505
506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523
524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541

Name _____ Title _____

Company _____

Company Address _____ City _____ Zone _____ State _____

FIRST CLASS

Permit No. 725

New York, N. Y.

B U S I N E S S R E P L Y M A I L

No Postage Stamp Necessary If Mailed In U. S.

POSTAGE WILL BE PAID BY


ELECTRONIC DESIGN

850 THIRD AVENUE

NEW YORK 22, NEW YORK

SUPERIOR MICRODIODE PACKAGING:


ADAM

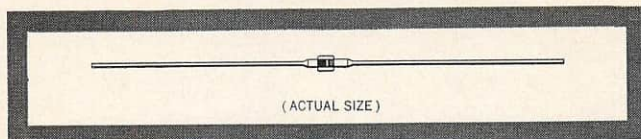

DIODE

WITH PLANAR* RELIABILITY

- **SMALL** — sandwich construction — no whisker.
- **STRONG** — true hermetic seal. No pressure contacts.
- **MECHANICAL STRENGTH** — stud-to-cathode and stud-to-anode solder-down.
- **VERSATILE** — replacement type for any of 276 silicon diodes.

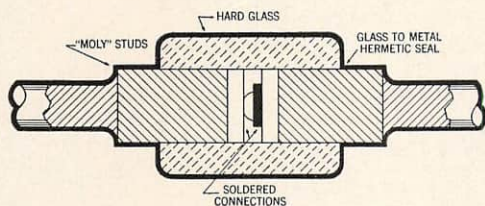

FDA 101

BV	75 Volts	Min.	@ $I_R = 5.0 \mu A$
I_R	$0.1 \mu A$	Max.	@ $V_R = 50 V$
V_F	1.0 V	Max.	@ $I_F = 20 mA$
t_{rr}	$2.0 m \mu sec$	Max.	@ $I_F = 10 mA, V_R = 6.0 mA$
C	3.0 pf	Max.	@ $V_R = 0V$

Available directly from distributor stocks.

Data sheet sent on request.

FAIRCHILD

SEMICONDUCTOR


A DIVISION OF FAIRCHILD CAMERA AND INSTRUMENT CORPORATION
545 WHISMAN RD., MOUNTAIN VIEW, CALIF. • YORKSHIRE 8-8161 • TWX-415-969-9165

ON READER-SERVICE CARD CIRCLE 483

* A patented Fairchild process.

AUTOMATIC TRANSISTOR TESTER/SORTER

FAIRCHILD
SERIES
200

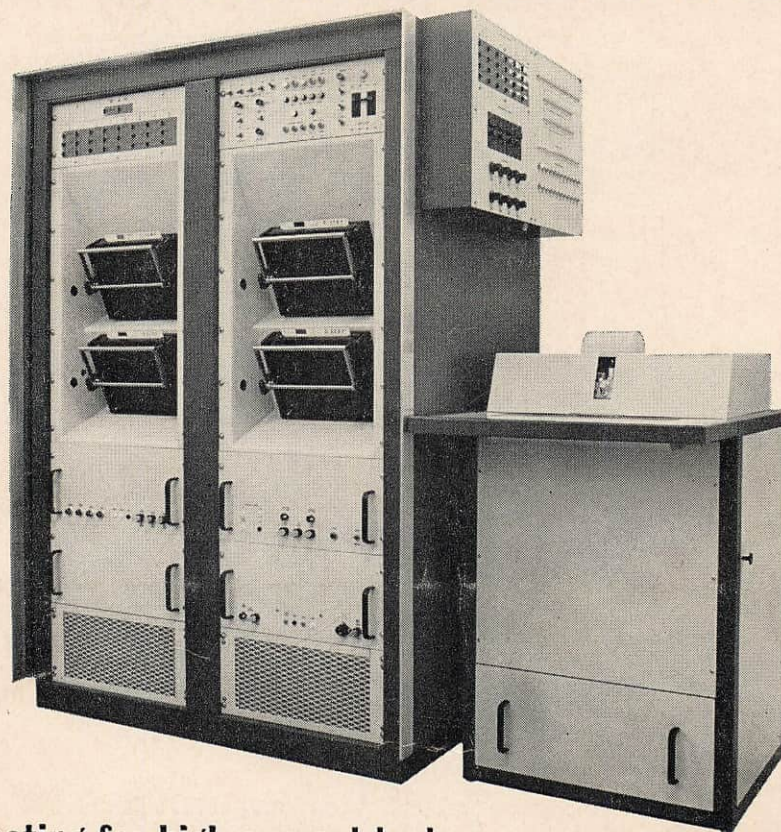

- **Pulse testing for high current tests**
- **Completely programmed with four plastic punched cards**
- **Tests 1500 transistors per hour — 24 tests per device**
- **Tests may be programmed in any order**

The high-speed, automatic classification and sorting capabilities of the Series 200 give this tester a wide variety of applications for both users and producers of transistors. It performs any combination of 24 standard tests—or a single test up to 24 times—on a go/no-go basis. The tests may be programmed in any order through an easy-to-use punch card system. Test rate: 1500 transistors per hour!

Pulse testing techniques eliminate junction heating effects to ensure accurate high current tests. Each tested transistor is automatically placed in the appropriate sort bin. The

Series 200 also features automatic detection of incorrect programming and performs an equipment self-check test during each test sequence. Write for data sheet and free demonstration. Fairchild offers the widest selection of equipment in the industry.

FAIRCHILD
SEMICONDUCTOR
(INSTRUMENTATION)